
FED. SUP CLASS
4730

BOSS DIMENSIONS IN ACCORDANCE WITH MS33649
FOR INTERNAL THREADED END

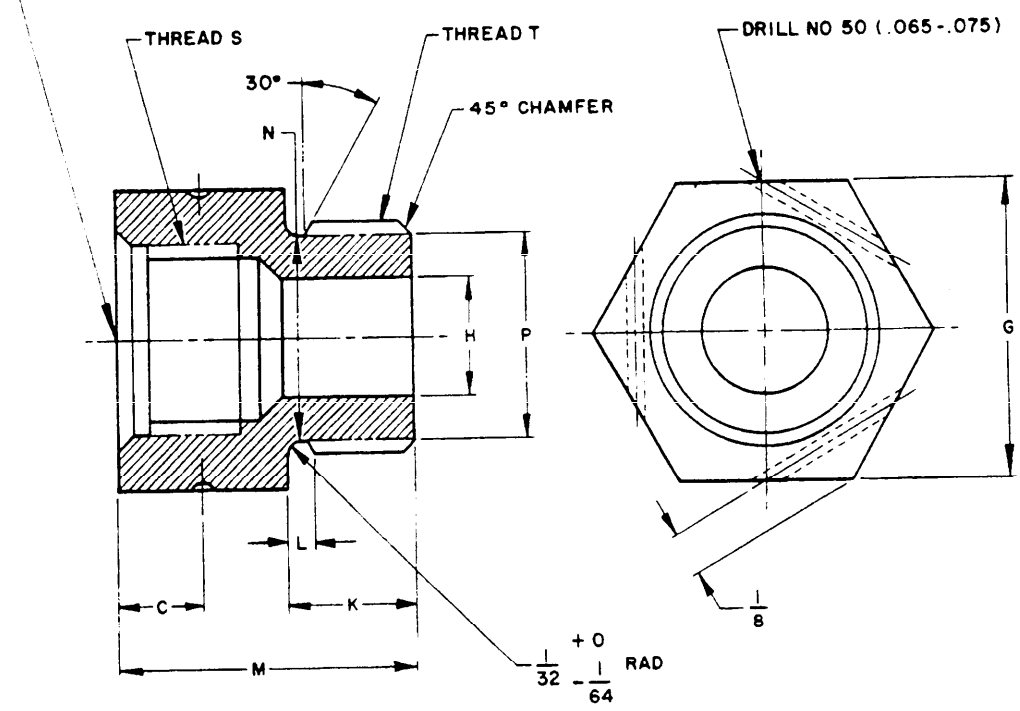

DIAMETERS S, N, H, AND T SHALL BE CONCENTRIC WITHIN .005 FULL INDICATOR READING.

MATERIAL: STEEL - BARS, SHAPES, OR FORGINGS.
ALUMINUM ALLOY - BARS, SHAPES, OR FORGINGS. TITANIUM ALLOY - BARS, SHAPES OR FORGINGS.
CORROSION RESISTANT STEEL - BARS, SHAPES, OR FORGINGS.
SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

NO CODE LETTER IN PART NUMBER FOR STEEL.
ADD D AFTER DASH NUMBER FOR ALUMINUM ALLOY, (EXCEPT 7075-T73).
ADD J AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 304.
ADD K AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 316.
ADD S AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 347.
ADD W AFTER DASH NUMBER FOR 7075-T73.
ADD T AFTER DASH NUMBER FOR TITANIUM.

EXAMPLE OF PART NUMBERS:
AN893-4 - BUSHING, 1/4 TO 3/4 TUBING STEEL.
AN893-4D - BUSHING, 1/4 TO 3/4 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
AN893-8J - BUSHING, 5/16 TO 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
AN893-8K - BUSHING, 5/16 TO 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
AN893-8S - BUSHING, 5/16 TO 1/2 TUBING, CORROSION RESISTANT STEEL, TYPE 347.
AN893-4W - BUSHING, 1/4 TO 3/4 TUBING, 7075-T73
AN893-4T - BUSHING, 1/4 TO 3/4 TUBING, TITANIUM.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, ANGLES ±1/2°.

TITANIUM NOT FOR USE IN OXYGEN SYSTEMS.

(10) ENTIRE STANDARD REVISED

APPROVED 22 OCT 42 REVISED (9) 16 APRIL 82 (10) 5 Oct 83

USER ACTIVITIES

REVIEWER ACTIVITIES
AIR FORCE - 11
ARMY - AV, MI
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A.	INTERNATIONAL INTEREST	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN893
AIR FORCE - 82 Other Cust ARMY - AV NAVY - AS AIR FORCE - 99		BUSHING, SCREW THREAD, REDUCER	
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 4730-0299

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

DASH NO.	INTERNALLY THREADED END				ENTERNALLY THREADED END						OVERALL		
	TUBING OD	THREAD S (REF)	C	H +.010 -.000 DIA	TUBING OD	(a) THREAD T REF	K	L +.015 -.000	N +.002 -.003 DIA	P DIA	G		M
1	1/4	.4375-20UNJF-3B	3/8	.206	5/16	1/2 -20UNJF-3A	3/8	.075	.427	13/32	.750	±.004	1- 7/64
2			11/32		3/8	9/16-18UNJF-3A	27/64	.083	.482	15/32	.813		
3			5/32	.383	1/2	3/4 -16UNJF-3A	15/32	.094	.660	5/8	1.000		25/32
31					5/8	7/8 -14UNJF-3A	17/32	.107	.773	3/4	1.125	±.005	27/32
4			13/64		3/4	1-1/16-12UNJ -3A	19/32	.125	.945	15/16	1.375		31/32
5					1	1-5/16-12UNJ -3A			1.195	1-3/16	1.625	±.016	
6					1-1/4	1-5/8 -12UNJ -3A			1.507	1-1/2	1.875		
7	5/16	.5000-20UNJF-3B	11/32	.257	3/8	9/16-18UNJF-3A	27/64	.083	.482	15/32	.813	±.004	1- 7/64
8			5/16		1/2	3/4 -16UNJF-3A	15/32	.094	.660	5/8	1.000		
81			5/32	.446	5/8	7/8 -14UNJF-3A	17/32	.107	.773	3/4	1.125	±.005	27/32
9			13/64		3/4	1-1/16-12UNJ -3A	19/32	.125	.945	15/16	1.375		31/32
10					1	1-5/16-12UNJ -3A			1.195	1-3/16	1.625	±.016	
11					1-1/4	1-5/8 -12UNJ -3A			1.507	1-1/2	1.875		
12	3/8	.5625-18UNJF-3B	5/16	.319	1/2	3/4 -16UNJF-3A	15/32	.094	.660	5/8	1.000	±.004	1-11/64
121				.502	5/8	7/8 -14UNJF-3A	17/32	.107	.773	3/4	1.125	±.005	1- 7/32
13			13/64		3/4	1-1/16-12UNJ -3A	19/32	.125	.945	15/16	1.375		31/32
14					1	1-5/16-12UNJ -3A			1.195	1-3/16	1.625	±.016	
15					1-1/4	1-5/8 -12UNJ -3A			1.507	1-1/2	1.875		
151	1/2	.7500-16UNJF-3B	7/16	.530	5/8	7/8--14UNJF-3A	17/32	.107	.773	3/4	1.125	±.005	1- 3/8
16			13/64	.680	3/4	1-1/16-12UNJ -3A	19/32	.125	.945	15/16	1.375		1-11/32
17				.682	1	1-5/16-12UNJ -3A			1.195	1-3/16	1.625	±.016	31/32
18					1-1/4	1-5/8 -12UNJ -3A			1.507	1-1/2	1.875		
19	5/8	.8750-14UNJF-3B		.555	3/4	1-1/16-12UNJ -3A			.945	15/16	1.375	±.005	1- 3/8
20				.798	1	1-5/16-12UNJ -3A			1.195	1-3/16	1.625	±.016	31/32
21					1-1/4	1-5/8 -12INJ -3A			1.507	1-1/2	1.875		
22	3/4	1.0625-12UNJ -3B		.937	1	1-5/16-12UNJ -3A			1.195	1-3/16	1.625		1-37/64
23				.972	1-1/4	1-5/8 -12UNJ -3A			1.507	1-1/2	1.875		31/32
24	1	1.3125-12UNJ -3B		1.222									1- 3/8

(10) ENTIRE STANDARD REVISED

APPROVED 1 JUNE 54 REVISED (10) FOR CHANGES SEE PAGES 1 & 2

USER ACTIVITIES

REVIEWER ACTIVITIES
AIR FORCE - 11
ARMY-AV, MI
DLA-CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P. A.
AIR FORCE-82
Other Cust
ARMY - AV
NAVY - AS
AIR FORCE-99

INTERNATIONAL INTEREST

AIR FORCE-NAVY AERONAUTICAL STANDARD

BUSHING, SCREW THREAD, REDUCER

AN893

PROCUREMENT SPECIFICATION
MIL - F - 5509

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.