INCH-POUND

AN915 Rev 14
w/ AMENDMENT 1
1 April 2025
SUPERSEDING
AN915 Rev 14
10 March 2015

DETAIL SPECIFICATION SHEET

ELBOW, PIPE, 45 DEGREE

Reinstated after 19 July 2011. Inactive for new design.
For new design, use SAE-AS4855.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and SAE-AS4842.

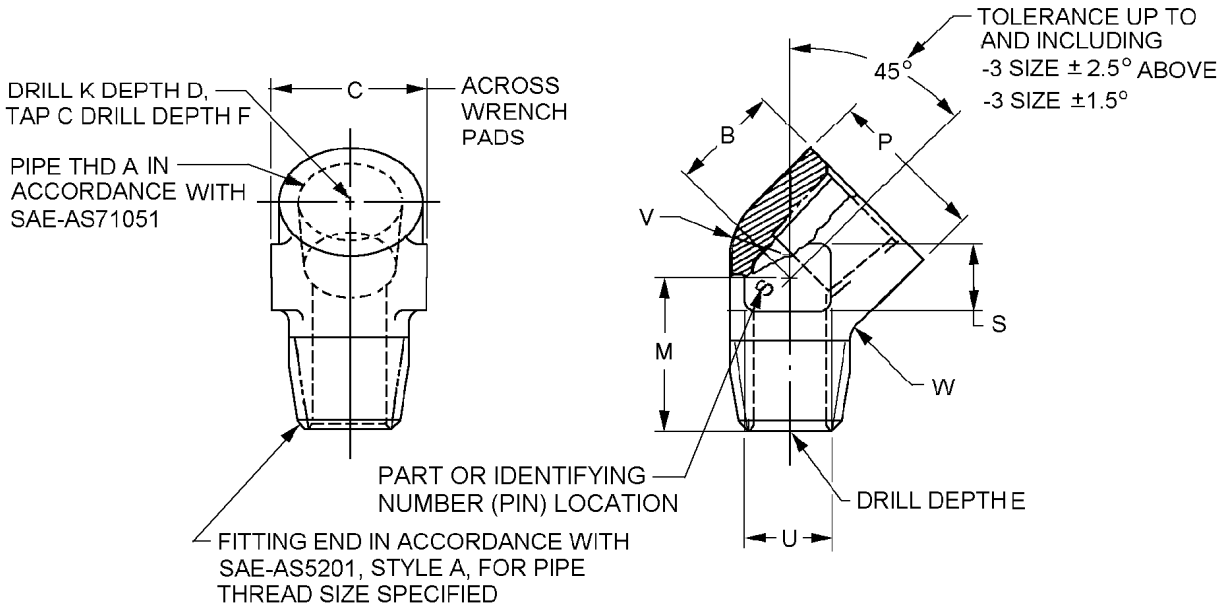


FIGURE 1. Elbow 45° dimensions and configuration.

AMSC N/A
DISTRIBUTION STATEMENT A: Approved for public release; Distribution is unlimited

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

Dash number	A Pipe size ANPT SAE-AS71051	B +.047 (1.19) -0.000 (mm)	C (mm)	D +.047 (1.19) -0.000 (mm)	E +.047 (1.19) -0.000 (mm)	F (mm)
1	1/8-27	.469 (11.91)	.625 (15.88)	.531 (13.49)	.781 (19.84)	.422 (10.72)
2	1/4-18	.625 (15.88)	.813 (20.65)	.688 (17.48)	1.109 (28.17)	.563 (14.30)
3	3/8-18	.719 (18.26)	.938 (23.83)	.813 (20.65)	1.156 (29.36)	.609 (15.47)
4	1/2-14	.906 (23.01)	1.188 (30.18)	1.016 (25.81)	1.453 (36.91)	.797 (20.24)
6	3/4-14	.969 (24.61)	1.375 (34.93)	1.125 (28.58)	1.531 (38.89)	.813 (20.65)
8	1-11 1/2	1.125 (28.58)	1.750 (44.45)	1.313 (33.35)	1.906 (48.41)	.969 (24.61)
10	1 1/4-11 1/2	1.156 (29.36)	2.156 (54.76)	1.438 (36.53)	2.156 (54.76)	.969 (24.61)

Dash number	K Dia. (mm)	M +.047 (1.19) -0.000 (mm)	P Dia. (mm)	S Approx (mm)	U Approx (mm)
1	.188 (4.48)	.719 (18.26)	.578 (14.68)	.188 (4.78)	.313 (7.95)
2	.281 (7.14)	1.047 (26.59)	.781 (19.84)	.375 (9.53)	.438 (11.13)
3	.406 (10.31)	1.063 (27.00)	.922 (23.42)	.375 (9.53)	.500 (12.70)
4	.531 (13.49)	1.344 (34.14)	1.156 (29.36)	.500 (12.70)	.625 (15.88)
6	.719 (18.26)	1.375 (34.93)	1.359 (34.52)	.625 (15.88)	.750 (19.05)
8	.938 (23.83)	1.719 (43.66)	1.688 (42.88)	.625 (15.88)	.875 (22.23)
10	1.250 (31.75)	1.875 (47.63)	2.125 (28.58)	.750 (19.05)	1.000 (25.40)

Dash number	V Rad. (mm)	W Rad. (mm)
1	.219 (5.56)	.063 (1.60)
2	.281 (7.14)	.094 (2.39)
3	.359 (9.12)	.094 (2.39)
4	.438 (11.13)	.125 (3.18)
6	.547 (13.89)	.125 (3.18)
8	.688 (17.48)	.125 (3.18)
10	.859 (21.82)	.156 (3.96)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.016 inch (0.41 mm).
4. Break sharp edges and remove all hanging burrs and slivers.
5. Machined surfaces shall be finished to 125µin Ra; forged surfaces shall be 250µin Ra, unless otherwise specified on the figures. Surface finish shall be in accordance with ASME B46.1.
6. For design features purposes, this standard takes precedence over documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.

FIGURE 1. Elbow 45° dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration shall be in accordance with figure 1.

Materials and finishes shall be in accordance with SAE-AS4842; see table I for material code.

TABLE I. Material and finish code letters.


Material and finish code	Material	Protective chemical finish 3/ 4/
No code 1/	Copper alloy, type 377 forging in accordance with ASTM B124/B124M or half hard forging or bar in accordance with ASTM B138/B138M or bar in accordance with SAE-AMS4614.	No finish.
BC 1/	Copper alloy, type 377 forging in accordance with ASTM B124/B124M or half hard forging or bar in accordance with ASTM B138/B138M or bar in accordance with SAE-AMS4614.	Cadmium in accordance with SAE-AMS-QQ-P-416, type II, class 3.
J	Type 304 corrosion resistant steel (CRES) forging or bar in accordance with SAE-AMS-QQ-S-763 or SAE-AMS5639.	Passivate in accordance with SAE-AMS2700, method 1, type 6 or 7.
K	Type 316 corrosion resistant steel (CRES) forging or bar in accordance with SAE-AMS-QQ-S-763 or SAE-AMS5648.	Passivate in accordance with SAE-AMS2700, method 1, type 6 or 7.
R	Type 321 corrosion resistant steel (CRES) forging or bar in accordance with SAE-AMS-QQ-S-763 or SAE-AMS5645.	Passivate in accordance with SAE-AMS2700, method 1, type 6 or 7.
T 3/	Titanium in accordance with SAE-AMS4928 alloy 6AI-4V annealed	Anodize in accordance with SAE-AMS2488, type 2. 4/
TF 3/	Titanium in accordance with SAE-AMS4928 alloy 6AI-4V annealed	Fluoride phosphate in accordance with SAE-AMS2486 4/
W 2/	Aluminum alloy forging in accordance with SAE-AMS-QQ-A-367 alloy 7075-T73 or aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/9 or SAE-AMS4124, alloy 7075-T7351 or 7075-T73.	Anodize in accordance with SAE-AMS2472 or MIL-PRF-8625, type II, class 2; dye brown similar to color in accordance with SAE-AMS-STD-595 color 10080; duplex seal in accordance with procurement specification.
WV 2/	Aluminum alloy forging in accordance with SAE-AMS-QQ-A-367 alloy 7075-T73 or aluminum alloy bar in accordance with SAE-AMS-QQ-A-225/9 or SAE-AMS4124, alloy 7075-T7351 or 7075-T73.	High purity aluminum in accordance with MIL-DTL-83488, class 3, type II with maximum coating thickness of .0005 inch. Glass bead peen pressure shall be 25 psi (1.72 bar) maximum.

1/ Material code was dash on previous revisions, changed to agree with SAE-ARP1590.
2/ Aluminum code D is canceled; use code W.
3/ Titanium and cadmium shall not be used in potable water or oxygen systems.
4/ A pretreatment, a modification of the fluoride treatment, or a post treatment shall be applied so the final color of the fittings shall be similar to SAE-AMS-STD-595 colors 36076 through 36293.

Oxygen systems for aerospace, shipboard, and ground support equipment. Parts for use in oxygen systems shall be identified in the PIN as code “A” and shall be furnished cleaned, packaged, and labeled in accordance with SAE-AS611 to a process approved by the user.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): The PIN consists of the prefix “AN”, specification sheet number, dash number for hose and flared tube size, material finish code letter(s) and blank of “A” for oxygen cleaning requirements. Unassigned PIN’s shall not be used.

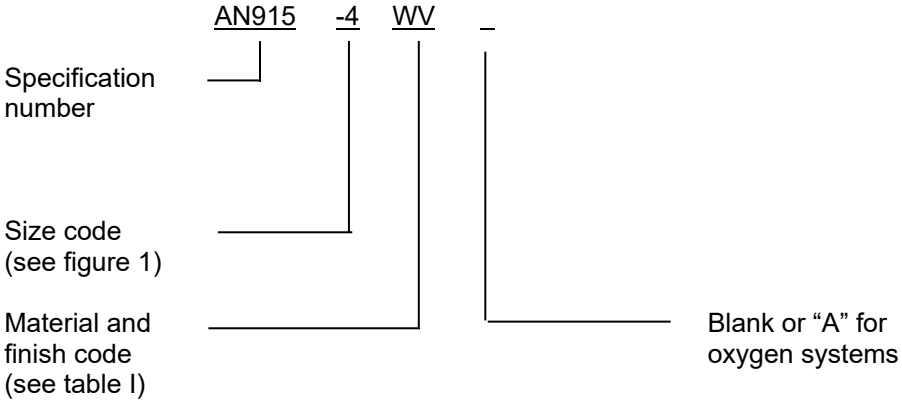

PIN examples:

AN915-4W indicates an adapter 45° elbow 1/2-14 ANPT internal pipe threads, aluminum alloy 7075-T73.

AN915-4WV indicates an adapter 45° elbow 1/2-14 ANPT internal pipe threads, aluminum alloy 7075-T73 finish with high purity aluminum.

AN915-4WA indicates an adapter 45° elbow 1/2-14 ANPT internal pipe threads, aluminum alloy 7075-T73 for use on oxygen systems.

Cadmium is not recommended. To the users of this document, it is recommended that the use of copper alloy material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements. Users should select the PIN with the least hazardous material that meets the form, fit, and function requirements of their application.

Supersession data:

Due to stress corrosion cracking aluminum alloys 2014 and 2024, “D” designator has been replaced by aluminum alloy 7075 “W” designator. Example: AN915-8D use AN915-8W.

Metal cracking due to high temperatures CRES alloy 347 “S” designator has been replaced by CRES alloy 321 “R” designator. Example: AN915-8S use AN915-8R.

Marking: Part shall be permanently marked with the AN PIN, and include the manufacturer’s CAGE, name, or trademark.

Cross reference data: SAE-AS4855 replacement numbers may be substituted for AN915 PINs, see table III.

CAUTION: The superseding information is valid as of the date of this specification and may be superseded by subsequent revisions of the superseding document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

TABLE II. Cross-reference data.

AN PIN (inactive)	Cancelled PIN	Pipe size	Replacement AS PIN (for new design)	Replacement AN PIN (inactive)
AN915-1		.125	AS4855-01 1/	
	AN915-1D	.125	AS4855W01	AN915-1W
AN915-1J		.125	AS4855J01	
AN915-1K		.125	AS4855K01	
AN915-1R		.125	AS4855R01	
	AN915-1S	.125	AS4855R01	AN915-1R
AN915-1T		.125	None	
AN915-1TF		.125	None	
AN915-1W		.125	AS4855W01	
AN915-1WV		.125	None	
AN915-2		.250	AS4855-02 1/	
	AN915-2D	.250	AS4855W02	AN915-2W
AN915-2J		.250	AS4855J02	
AN915-2K		.250	AS4855K02	
AN915-2R		.250	AS4855R02	
	AN915-2S	.250	AS4855R02	AN915-2R
AN915-2T		.250	None	
AN915-2TF		.250	None	
AN915-2W		.250	AS4855W02	
AN915-2WV		.250	None	
AN915-3		.375	AS4855-03 1/	
	AN915-3D	.375	AS4855W03	AN915-3W
AN915-3J		.375	AS4855J03	
AN915-3K		.375	AS4855K03	
AN915-3R		.375	AS4855R03	
	AN915-3S	.375	AS4855R03	AN915-3R
AN915-3T		.375	None	
AN915-3TF		.375	None	
AN915-3W		.375	AS4855W03	
AN915-3WV		.375	None	
AN915-4		.500	AS4855-04 1/	
	AN915-4D	.500	AS4855W04	AN915-4W
AN915-4J		.500	AS4855J04	
AN915-4K		.500	AS4855K04	
AN915-4R		.500	AS4855R04	
	AN915-4S	.500	AS4855R04	AN915-4R
AN915-4T		.500	None	
AN915-4TF		.500	None	
AN915-4W		.500	AS4855W04	
AN915-4WV		.500		

See note at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

TABLE II. Cross-reference data - Continued.

AN PIN (inactive)	Cancelled PIN	Pipe size	Replacement AS PIN (for new design)	Replacement AN PIN (inactive)
AN915-6		.750	AS4855-06 1/	
	AN915-6D	.750	AS4855W06	AN915-6W
AN915-6J		.750	AS4855J06	
AN915-6K		.750	AS4855K06	
AN915-6R		.750	AS4855R06	
	AN915-6S	.750	AS4855R06	AN915-6R
AN915-6T		.750	None	
AN915-6TF		.750	None	
AN915-6W		.750	AS4855W06	
AN915-6WV		.750	None	
AN915-8		1.000	AS4855-08 1/	
	AN915-8D	1.000	AS4855W08	AN915-8W
AN915-8J		1.000	AS4855J08	
AN915-8K		1.000	AS4855K08	
AN915-8R		1.000	AS4855R08	
	AN915-8S	1.000	AS4855R08	AN915-8R
AN915-8T		1.000	None	
AN915-8TF		1.000	None	
AN915-8W		1.000	AS4855W08	
AN915-8WV		1.000	None	
AN915-10		1.250	AS4855-10 1/	
	AN915-10D	1.250	AS4855W10	AN915-10W
AN915-10J		1.250	AS4855J10	
AN915-10K		1.250	AS4855K10	
AN915-10R		1.250	AS4855R10	
	AN915-10S	1.250	AS4855R10	AN915-10R
AN915-10T		1.250	None	
AN915-10TF		1.250	None	
AN915-10W		1.250	AS4855W10	
AN915-10WV		1.250	None	

1/ SAE part may be unplated or cadmium plated.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations

Referenced documents. In addition to SAE-AS4842, this document references the following:

MIL-PRF-8625	SAE-AMS2488
MIL-DTL-83488	SAE-AMS4124
ASME B46.1	SAE-AMS4614
ASTM B124/B124M	SAE-AMS4928
ASTM B138/B138M	SAE-AMS5639
SAE-AMS-STD-595	SAE-AMS5645
SAE-AMS-QQ-A-225/9	SAE-AMS5648
SAE-AMS-QQ-A-367	SAE-ARP1590
SAE-AMS-QQ-P-416	SAE-AS611
SAE-AMS-QQ-S-763	SAE-AS4855
SAE-AMS2700	SAE-AS5201
SAE-AMS2472	SAE-AS71051
SAE-AMS2486	

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 71

Preparing activity:
DLA - CC

(Project 4730-2025-037)

Review activities:
Navy - MC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.