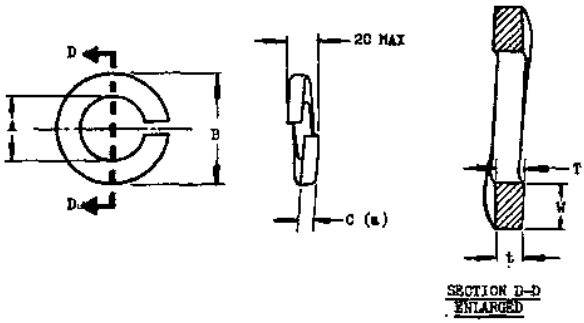


DASH NUMBERS		BOLT SIZE	A -.000	MEDIUM SERIES			LIGHT SERIES		
MEDIUM SERIES	LIGHT SERIES			B MAX	C -.000	W MIN	B MAX	C -.000	W MIN
2	2L	NO. 2(.086)	.088 +.009	.175	.020 +.006	.035	.165	.015 +.006	.030
3	3L	NO. 3(.099)	.102 +.009	.198	.025 +.006	.040	.188	.020 +.006	.035
4	4L	NO. 4(.112)	.115 +.009	.212	.025 +.006	.040	.202	.020 +.006	.035
5	5L	NO. 5(.125)	.128 +.009	.239	.031 +.006	.047	.225	.025 +.006	.040
6	6L	NO. 6(.138)	.141 +.010	.253	.031 +.006	.047	.239	.025 +.006	.040
8	8L	NO. 8(.164)	.168 +.010	.296	.040 +.006	.055	.280	.031 +.006	.047
10	10L	NO.10(.190)	.194 +.011	.337	.047 +.006	.062	.323	.040 +.006	.055
12	12L	NO.12(.216)	.221 +.011	.380	.056 +.006	.070	.364	.047 +.006	.062
416	416L	1/4	.255 +.012	.493	.062 +.010	.109	.489	.047 +.010	.107
516	516L	5/16	.319 +.014	.591	.078 +.010	.125	.575	.056 +.010	.117
616	616L	3/8	.382 +.016	.688	.094 +.010	.141	.678	.070 +.010	.136
716	716L	7/16	.446 +.018	.784	.109 +.010	.156	.780	.085 +.010	.154
816	816L	1/2	.509 +.020	.879	.125 +.010	.171	.877	.099 +.010	.170
916	916L	9/16	.573 +.022	.979	.141 +.010	.188	.975	.113 +.010	.186
1016	1016L	5/8	.636 +.024	1.086	.156 +.010	.203	1.082	.126 +.010	.201
1216	1216L	3/4	.763 +.028	1.279	.188 +.010	.234	1.277	.153 +.010	.233

(a) MEAN THICKNESS $C = \frac{T+t}{2}$

INCREASE IN THICKNESS FROM OUTER PERIPHERY TO INNER PERIPHERY SHALL BE: (T-t) MIN = .032W ; (T-t) MAX = .064W.

MATERIALS: CARBON STEEL: CLASS A MATERIAL IN PROCUREMENT SPECIFICATION; PHOSPHOR BRONZE: CLASS E MATERIAL IN PROCUREMENT SPECIFICATION OR SPECIFICATION QQ-B-746, COMPOSITION A, CONDITION HARD; SILICON BRONZE: CLASS F MATERIAL IN PROCUREMENT SPECIFICATION OR SPECIFICATION QQ-C-591, CLASS A, CONDITION HARD.

FINISH: STEEL: CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS 3.
PHOSPHOR AND SILICON BRONZE: CADMIUM PLATE, SPECIFICATION QQ-P-416, TYPE II, CLASS 3, AND DYE DEEP YELLOW IN ACCORDANCE WITH FEDERAL STANDARD NO. 595, COLOR NO. 23538.

TABULATED DASH NUMBERS DESIGNATE CARBON STEEL LOCK WASHERS.
ADD B BEFORE DASH NUMBER FOR PHOSPHOR BRONZE OR SILICON BRONZE LOCK WASHERS.
EXAMPLES OF PART NUMBERS:
AN935-10 = STEEL LOCK WASHER, MEDIUM SERIES, FOR NO. 10 BOLT.
AN935B10 = BRONZE LOCK WASHER, MEDIUM SERIES, FOR NO. 10 BOLT.
AN935-10L = STEEL LOCK WASHER, LIGHT SERIES, FOR NO. 10 BOLT.
AN935B10L = BRONZE LOCK WASHER, LIGHT SERIES, FOR NO. 10 BOLT.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES.

IN CASE OF CONFLICT, THE REQUIREMENTS SPECIFIED HEREON SHALL TAKE PRECEDENCE OVER THE REQUIREMENTS SPECIFIED IN SPECIFICATION FF-W-84.

USE IN CONFORMANCE WITH AND10476, WASHER-LIMITATIONS ON USAGE OF LOCK.

(5) INACTIVE FOR NEW DESIGN AFTER 13 SEPTEMBER 1967 USE MS35338
FOR INTERCHANGEABILITY RELATIONSHIP SEE MS35338.

APPROVED 26 Aug 42 REVISED (1) 22 May 44 (2) 28 Oct 49 (3) 3 Jun 53 (4) 12 Aug 59 (5) 13 Sept 67

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN935
FF-W-84	WASHER - LOCK, SPRING	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.