
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

User activities: Army - ME,AV; Navy - AS; Air Force - 99

Review activities: Army - ME,AV; Navy - AS; Air Force - 99; DLA-CS

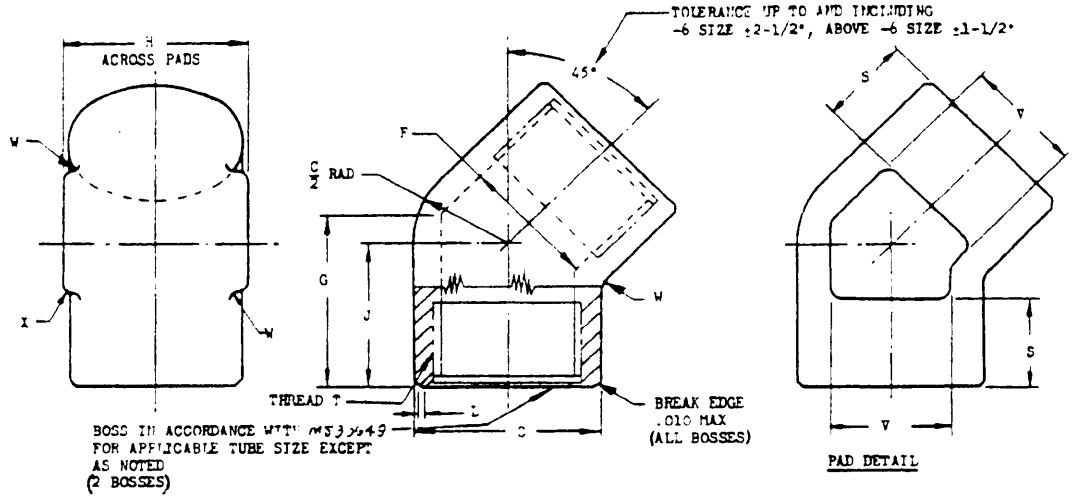

SQUARENESS BETWEEN THREAD T AND FACE OF BOSS SHALL CONFORM TO MS33649 AS SPECIFIED.
MATERIAL: STEEL, ALUMINUM ALLOY: SHAPES OR FORGINGS.
CORROSION RESISTANT STEEL (CRES), TITANIUM ALLOY; BARS, SHAPES, OR FORGINGS.
SEE PROCUREMENT SPECIFICATION.
FINISH: SEE PROCUREMENT SPECIFICATION.
NO CODE LETTER IN PART NUMBER FOR STEEL.
(6) ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
~~ADD C IN PLACE OF DASH FOR CRES, TYPE 302, 303, 304, 316, AND 321.~~
ADD J IN PLACE OF DASH FOR CRES, TYPE 304.
ADD K IN PLACE OF DASH FOR CRES, TYPE 316.
ADD S IN PLACE OF DASH FOR CRES, TYPE ~~304L AND~~ 347. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 304L STEEL AFTER 10 FEBRUARY 1967.
ADD T IN PLACE OF DASH FOR TITANIUM ALLOY. TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.
(6) ADD W IN PLACE OF DASH FOR 7075-T73 ALUMINUM ALLOY.
(6) ITEMS CODED C ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. PROCURING ACTIVITIES MUST SPECIFY APPLICABLE CRES MATERIAL CODE AS PART OF THE STANDARD PART NUMBER.

EXAMPLE OF PART NUMBERS:
AN941-8 - ELBOW, 1/2 TUBING, STEEL.
(6) AN941D8 - ELBOW, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
~~AN941C8 - ELBOW, 1/2 TUBING, CRES, TYPE 302, 303, 304, 316, OR 321.~~
AN941J8 - ELBOW, 1/2 TUBING, CRES, TYPE 304.
AN941K8 - ELBOW, 1/2 TUBING, CRES, TYPE 316.
AN941S8 - ELBOW, 1/2 TUBING, CRES, TYPE 347.
AN941T8 - ELBOW, 1/2 TUBING, TITANIUM ALLOY.
(6) AN941W8 - ELBOW, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: FRACTIONS ±1/64.
ALUMINUM ALLOY FITTINGS, SIZES -10 THROUGH -20, SHALL NOT BE USED AT WORKING PRESSURES ABOVE 1500 PSI.
SEE AND10064 FOR INSTALLATION DETAILS.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(6) denotes changes

APPROVED 27 JAN 50 — REVISED (1) 6 FEB 51 (2) 1 JUN 53 (3) 1 JUN 54 (4) 10 FEB 67 (5) 16 JUN 78 (6) 21 MAR 79

P.A. Air Force-99 Other Cust	International Interest	AIR FORCE - NAVY AERONAUTICAL STANDARD	AN941
		ELBOW, TUBE, INTERNAL THREAD, 45°	
Procurement Specification MIL-F-5509		SUPERSEDES: AN928	PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 20260-26T14:17Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - ME, AV
Navy - AS
Air Force - 99
DLA-CS

User activities: Army - ME, AV
Navy - AS
Air Force - 99

DD FORM 1 SEP 67 6721 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Procurement Specification: MIL-F-5509

P.A. Air Force-99
Other Cust

International interest:

SUPERSEDES: AN928

AIR FORCE - NAVY AERONAUTICAL STANDARD

ELBOW, TUBE, INTERNAL THREAD, 45°

AN941

PAGE 2 OF 2

DASH NO.	TUBING OD	THREAD T (REF)	C DIA	F +.000 -.015 DIA	G +3/64 -0	H	J +3/64 -0	L MIN LAND	S APPROX	V APPROX	W MIN RAD	X MIN RAD	WEIGHT MAX (LBS.) STEEL	AL ALLOY	CRES	TI ALLOY
4	1/4	7/16-20UNJF-3B	11/16	.397	49/64	3/4	11/16	.040	1/2	15/32	3/32	1/16				
5	5/16	1/2-20UNJF-3B	3/4	.459	13/16		23/32			1/2						
6	3/8	9/16-18UNJF-3B	13/16	.516	27/32	13/16	47/64			17/32						
8	1/2	3/4-16UNJF-3B	1-1/16	.697	1-1/16	1-1/16	29/32	.071	19/32	11/16						
10	5/8	7/8-14UNJF-3B	1-3/16	.815	1-7/32	1-3/16	1-1/16		23/32	13/16	1/8	3/32				
12	3/4	1-1/16-12UNJ-3B	1-7/16	.991	1-27/64	1-7/16	1-7/32	.077	13/16	29/32						
16	1	1-5/16-12UNJ-3B	1-11/16	1.241	1-39/64	1-11/16	1-11/32		27/32	1-3/32						
20	1-1/4	1-5/8-12UNJ-3B	2	1.553	1-25/32	2	1-29/64			1-5/16		1/8				

FED. SUP. CLASS 4730

APPROVED 27 JAN 50

REVISED (6) For changes see page 1. 21 MAR 79

4730-995

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:17Z
Check the source to verify that this is the current version before use.