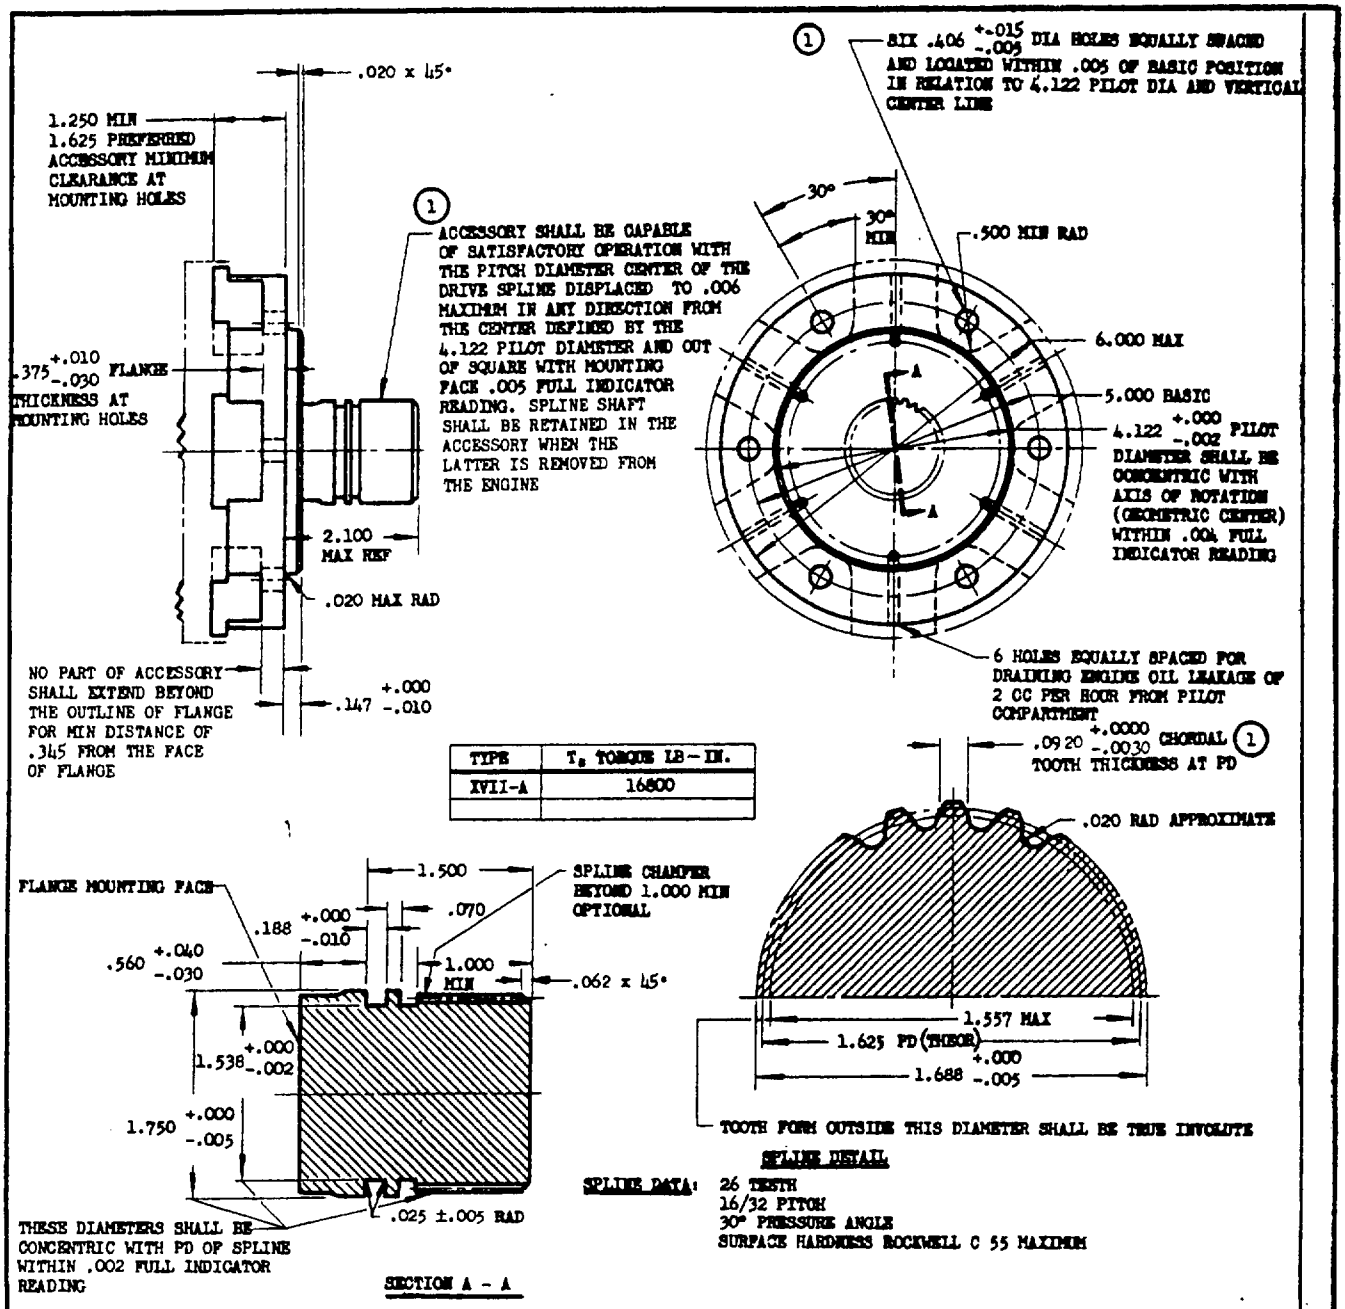


TYPE	T_s TORQUE LB-IN.
XVII-A	16800

FLANGE OUTLINE AS DIMENSIONED IS A BASIC MAXIMUM AREA REQUIREMENT.

THE ACCESSORY SHALL OPERATE SATISFACTORILY WITH OIL LEAKAGE FROM THE ENGINE INTO THE PILOT COMPARTMENT NOT EXCEEDING 2 CC PER HOUR. ELECTRICAL ACCESSORIES SHALL PROVIDE FOR HOLES AS SPECIFIED IN ACCESSORY SPECIFICATION FOR DRAINING THE ENGINE OIL LEAKAGE OF 2 CC PER HOUR.

ROTATION: CLOCKWISE AS VIEWED FROM OPPOSITE THE DRIVE END.

STRENGTH: THE ACCESSORY SHALL PROVIDE A SHEAR SECTION THAT SHALL FAIL AT A TORQUE BELOW (T_s).

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

1 THIS DRAWING AND THE APPLICABLE ACCESSORY SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

NOMINAL USE OF THIS FLANGE IS FOR POWER INPUT.

FOR DETAIL OF TYPE XVII ENGINE DRIVE SEE AND20007.

APPROVED 1 Aug 49 REVISED 1 4 Mar 53


AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

FLANGE — TYPE XVII ACCESSORY MOUNTING


AND10267

SHEET 1 OF 2 SHEETS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.

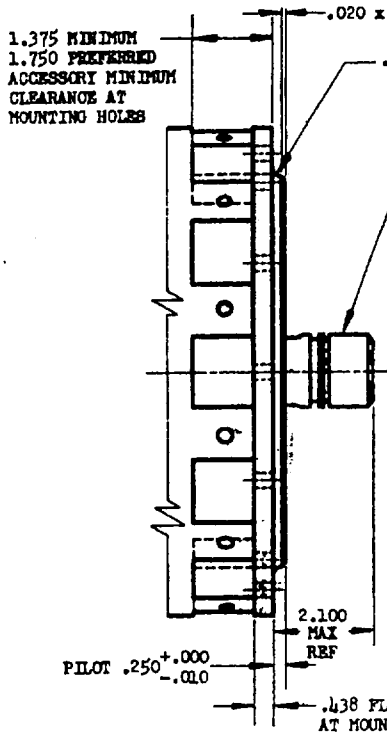


(1) ACCESSORY SHALL BE CAPABLE OF SATISFACTORY OPERATION WITH THE PITCH DIAMETER CENTER OF THE DRIVE SPLINE DISPLACED TO .006 MAXIMUM IN ANY DIRECTION FROM THE CENTER DEFINED BY THE 8.998 PILOT DIAMETER AND OUT OF SQUARE WITH MOUNTING FACE .009 FULL INDICATOR READING. SPLINE SHAFT SHALL BE RETAINED IN THE ACCESSORY WHEN THE LATTER IS REMOVED FROM THE ENGINE

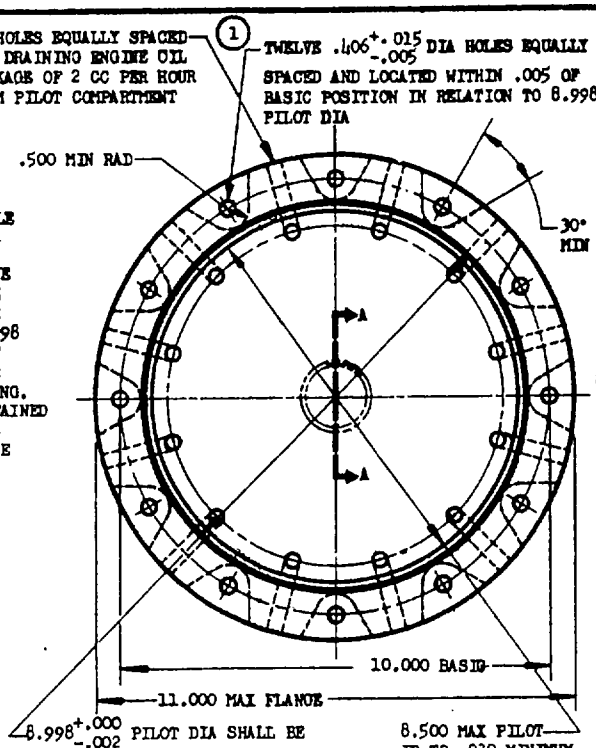

TYPE	T_s TORQUE LB-IN.
XVII-C	16800

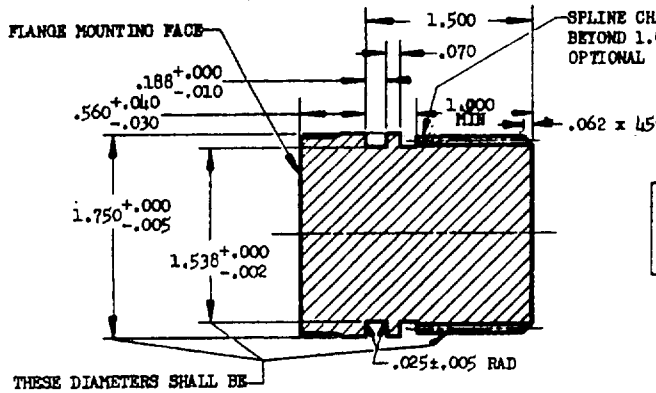

SECTION A-A

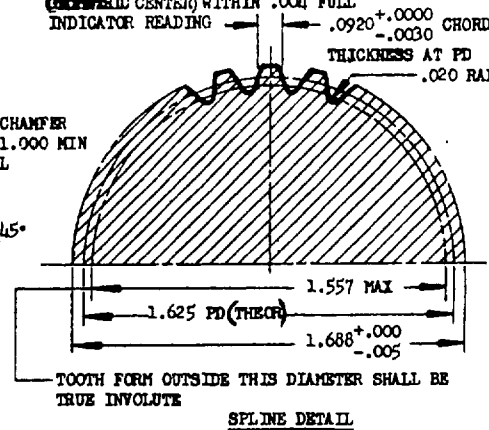

SPLINE DETAIL

SPLINE DATA

26 TEETH
16/32 PITCH
30° PRESSURE ANGLE
SURFACE HARDNESS ROCKWELL C 55 MAX

FLANGE OUTLINE AS DIMENSIONED IS A BASIC MAXIMUM AREA REQUIREMENT.

THE ACCESSORY SHALL OPERATE SATISFACTORILY WITH OIL LEAKAGE FROM THE ENGINE INTO THE PILOT COMPARTMENT NOT EXCEEDING 2 CC PER HOUR. ELECTRICAL ACCESSORIES SHALL PROVIDE FOR HOLES AS SPECIFIED IN ACCESSORY SPECIFICATIONS FOR DRAINING THE ENGINE OIL LEAKAGE OF 2 CC PER HOUR.

ROTATION: CLOCKWISE AS VIEWED FROM OPPOSITE THE DRIVE END.

STRENGTH: THE ACCESSORY SHALL PROVIDE A SHEAR SECTION THAT SHALL FAIL AT A TORQUE BELOW (T_s).

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

(1) THIS DRAWING AND THE APPLICABLE ACCESSORY SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

NOMINAL USE OF THIS FLANGE FOR LARGE STARTERS AND STARTER GENERATORS.

FOR DETAIL OF TYPE XVII ENGINE DRIVE SEE AND20007.

APPROVED 1 Aug 49 REVISED (1) 4 Mar 53

NOTE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD	AND10267
FLANGE — TYPE XVII ACCESSORY MOUNTING	SHEET 2 OF 2 SHEETS

NOT A PART NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.