NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/390A
3 August 2021
SUPERSEDING
MIL-DTL-11484/390
11 October 2016

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, DEPARTMENT OF STATE, SECRETARY'S AWARD

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484.

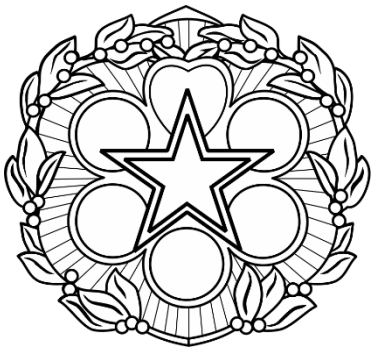

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry Metal Finish Chip Number 8.

DIMENSIONS:
HEIGHT: 5/8 inch (REF)
WIDTH: 11/16 inch (REF)
THICKNESS: 0.093 ± 0.010 inch

ATTACHING DEVICE:
1. The attaching device shall be prong with pick and wing type clutch.

2. The prong shall be centered on the vertical center line on the reverse side, 1/4 inch from the top and fused or soldered to the lapel button.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:07Z
Check the source to verify that this is the current version before use.

2. The five circles and heart shall be filled with White Epoxy #28. The center star shall be filled with purple epoxy that matches DOD Yarn Color #67115. All epoxy will be a floating epoxy.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-643)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:07Z
Check the source to verify that this is the current version before use.