INCH-POUND


MIL-DTL-11484/391
28 October 2016

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, DEFENSE POW/MIA ACCOUNTING AGENCY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

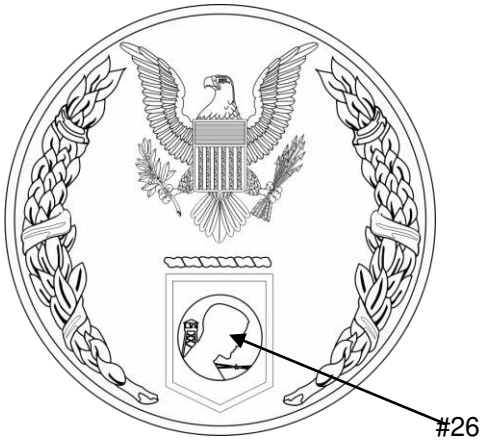

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BOTH WREATHS AND EAGLE: 24K Gold Plated, Matte Finish Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
BACKGROUND AND POW/MIA SYMBOL: Silver Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 13.

DIMENSIONS:
DIAMETER: 7/8 inch (REF)
THICKNESS: 0.073 inch $\pm$ 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be prong with pick and wing type clutch

2. Fused or soldered on the vertical center line 1/4 inch from the top.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:07Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Black	#26

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2016-834)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:07Z
Check the source to verify that this is the current version before use.