INCH-POUND


MIL-DTL-11484/426
8 April 2019

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, PURPLE CROSS WOUND MEDAL,
U.S. BORDER PATROL

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-11484.

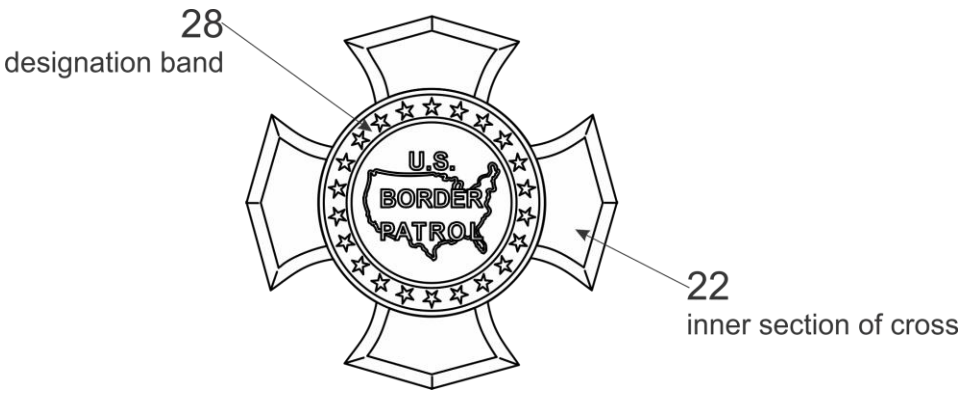

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Finish Chip Number 8.

DIMENSIONS:
DIAMETER: 5/8 inch (REF)
THICKNESS: 0.070 ± 0.010 inch

ATTACHING DEVICE:
1. The attaching device shall be prong with pick and wing type clutch.

2. The prong shall be fused or soldered on the vertical center line on the reverse side, 1/4 inch from the top.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:12Z
Check the source to verify that this is the current version before use.

Epoxy resin will be applied to the Base of the badge as specified below, and must match TIOH Hard Enamel Color Chip Numbers listed.

TIOH HARD ENAMEL COLOR CHIP NUMBER	LOCATION(S)
Purple #22	Section of the Cross
White #28	Inside the Circle with Stars

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The manufacturer may deviate from MIL-DTL-3943 by using nickel under plating prior to applying the requisite 24K gold plating.

3. The epoxy used for the lapel button will be floating epoxy.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2019-168)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T18:12Z
Check the source to verify that this is the current version before use.