INCH-POUND


MIL-DTL-83420/4B
21 December 2000
SUPERSEDING
MIL-DTL-83420/4A
30 October 1999

* DETAIL SPECIFICATION SHEET

WIRE ROPE, FLEXIBLE, TYPE II (JACKETED), COMPOSITION B

This specification is approved for use by all Departments and Agencies of the Department of Defense.

* The requirements for acquiring the wire rope described herein shall consist of this specification sheet and the latest issue of MIL-DTL-83420 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

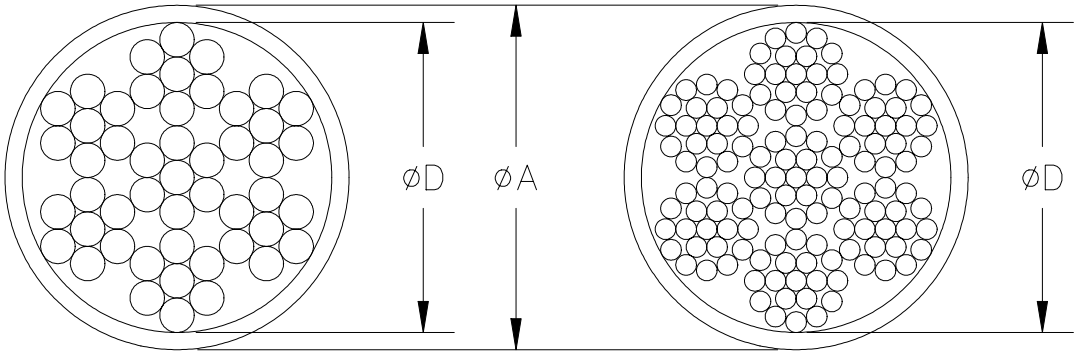

WIRE ROPE, 7 x 7 WIRE ROPE, 7 x 19

* NOTES:

1. Unless otherwise specified, all dimensions are in inches.
2. Qualified Products List (QPL) 83420 applies to the products listed herein.

FIGURE 1. Wire rope, flexible, type II, (jacketed) composition B.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Corrosion Resistant steel (see procurement specification).

2. Part Number: The part number consists of the letter "M", the basic number of this specification sheet, and a dash number taken from table I.

* EXAMPLE: M83420/4-004

Dash number

Specification sheet number

* M83420/4-004 Indicates - Wire Rope, Flexible, Type II, Corrosion Resistant Steel, Jacketed, Construction 7 x 19, Diameter 3/32, 1/8 Outside Diameter Jacket

* TABLE I. Dash numbers.

Dash Number	Diameter "D"	Diameter "A" Outside Diameter of Jacket	Type of Construction	Breaking Strength (lbs.)	Length Per Reel (ft.) 1/
001	3/64	1/16	7 x 7	270	1,000
002	1/16	3/32	7 x 7	480	1,000
003	3/32	1/8	7 x 19	920	100
004	3/32	1/8	7 x 19	920	1,000
005	3/16	1/4	7 x 19	3,700	1,000
006	1/4	5/16	7 x 19	6,400	500
007	1/4	5/16	7 x 19	6,400	1,000
008	1/32	3/64	3 x 7	110	1,000
009	3/64	5/64	7 x 7	270	1,000
010	1/16	1/8	7 x 7	480	1,000
011	1/16	3/32	7 x 19	480	1,000
012	1/16	1/8	7 x 19	480	1,000
013	3/32	1/8	7 x 7	920	1,000
014	3/32	5/32	7 x 7	920	1,000
015	3/32	5/32	7 x 19	920	100
016	1/8	3/16	7 x 19	1,760	1,000

1/ or as specified in the purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers - Continued.

Dash Number	Diameter "D"	Diameter "A" Outside Diameter of Jacket	Type of Construction	Breaking Strength (lbs.)	Length Per Reel (ft.) 1/
017	5/32	7/32	7 x 19	2,400	1,000
018	5/32	9/32	7 x 19	2,400	1,000
019	3/16	5/16	7 x 19	3,700	1,000
020	7/32	9/32	7 x 19	5,000	1,000
021	7/32	11/32	7 x 19	5,000	1,000
022	1/4	3/8	7 x 19	6,400	1,000
023	9/32	13/32	7 x 19	7,800	1,000
024	5/16	7/16	7 x 19	9,000	1,000
025	3/8	1/2	7 x 19	12,000	1,000

1/ or as specified in the purchase order.

* CHANGES FROM PREVIOUS ISSUE: The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Reviewer:
Air Force - 82

Preparing activity:
DLA - GS5

(Project 4010-0113)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.