MIL-N-48831(PA)
9 June 1975
SUPERSEDING
See Section 6

MILITARY SPECIFICATION

NOSE SECTION ASSEMBLY NIKE HERCULES TRAINER M74

1. SCOPE

1.1 This specification covers requirements, quality assurance provisions, and the preparation for delivery criteria for one type of nose section entitled Nose Section Assembly which is used with the Nike Hercules Trainer M74.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-N-48820 - Warhead Section, Training: M74, Packing and Handling.

FEDERAL

AN 505-8R32 - Screw-machine, Flat Head 82 Degree, Coarse Thread.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-1168 - Lot Numbering of Ammunition.

FSC 1135

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

DRAWINGS

ORDNANCE CORPS

EL-8815553	- Equipment Lists.
8846002	- Nose Section Assembly.
8846052	- Cover.
8846079	- Continuity Plug, Electrical, Simulated.
8846374	- Nose Section Assembly - Packaging Drawing.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials. The contractor shall furnish objective evidence (see 6.2) that the material complies with the specifications listed on the applicable drawing.

3.2 Assembly. The nose assembly shall comply with all requirements specified on the drawing (dwg) 8846002, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.2).

3.4 Continuity Plug, Electrical, Simulated (see dwg 8846079). Continuity shall exist between pin 47 and the shell when tested as specified in 4.4.1.

3.5 Workmanship.

3.5.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.5.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.5.3 Burrs. Parts shall be free from burrs.

3.5.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.5.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

3.5.6 Electrical. Cable assemblies and wires shall be dressed in such a manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from burrs, sharp edges, or points. All parts shall be free from flux, chips, dirt, grease, rust or foreign material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.

4.2.1 Quantity to be submitted. When the contract requires first article inspection, the contractor shall submit 3 complete assemblies (see dwg 8846002) for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.2.2 Inspection and testing to be performed. The first article inspection sample shall be subjected to the inspections and tests specified in Table I. Tests shall be conducted in order specified in Table I.

Table I

First article inspection and tests

Inspection or Test	Dest	Non-Dest
1. Classification of characteristics (see 4.3.2.1)		X
2. Continuity (see 3.4)		X

4.2.3 Inspection equipment. The inspection and testing specified in 4.2.2 shall be accomplished by using the gages and test equipment specified in 4.3.4.1.

4.2.4 Rejection. If any item fails to comply with any of the applicable requirements, the first article sample shall be rejected.

4.3 Quality conformance inspection.

4.3.1 Lot formation.

4.3.1.1 Production lot. A lot shall consist of parts and assemblies produced by one manufacturer in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision. Drawing, specification and process changes not affecting safety, performance, storage, or interchangeability, as determined by the Government, shall not necessitate changing

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

the lot interfix number. The criteria and procedures for the assignment of lot numbers shall be in accordance with MIL-STD-1168.

4.3.1.2 Inspection lot. A lot or batch and its formation, size, and presentation is described in MIL-STD-105, Section 5. Accordingly, a lot shall mean an inspection lot and a batch shall mean an inspection batch for the purpose of this specification. The manner in which each inspection lot or batch is to be presented and identified by the contractor, shall be designated or approved by the Government representative.

4.3.2 Product inspection examination. A sample shall be selected at random from each inspection lot in accordance with the applicable major or minor characteristic table (see Table II and Table III), and inspected for all characteristics in the applicable classification. Any characteristics in the sample found to be defective shall reject the inspection lot. Sequence for the inspection of characteristics in each classification need not be followed as long as all characteristic inspections are performed.

Table II
Major Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-16	all	28-29	23	52-56	31	132-156	39
17	16	30-31	24	57-62	32	157-191	40
18	17	32-34	25	63-69	33	192-244	41
19-20	18	35-36	26	70-76	34	245-334	42
21	19	37-40	27	77-86	35	335-519	43
22-23	20	41-43	28	87-97	36	520-1120	44
24-25	21	44-47	29	98-112	37	over 1120	45
26-27	22	48-51	30	113-131	38		

Table III
Minor Characteristics

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-9	all	14-16	12	28-33	16	77-121	20
10	9	17-18	13	34-41	17	122-273	21
11	10	19-22	14	42-54	18	over 273	22
12-13	11	23-27	15	55-76	19		

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

4.3.2.1 Classification of characteristics (see 3.2). Critical, major and minor characteristics are defined in MIL-STD-105. Inspection shall be conducted as follows:

4.3.2.1.1 Nose section assembly (see dwg 8846002).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
101.	Nose hoist ring with two accessory screws missing or not mounted in position	Visual
102.	Bags containing six bolts, access covers, and screws missing from nose section	Visual
103.	Protrusion of dummy cable and pneumatic hose from transponder base under 30 inches	Gage
104.	Mounting holes at station 87.5 improperly located	Gage
105.	Mounting holes at station 87.5 improperly drilled	Gage
106.	Transponder missing	Visual
107.	Fail Safe device (inert) and insulating pillows missing from above inert transponder	Visual
108.	Pins missing from nose section	Visual
109.	Nose cap missing from station 6.75	Visual
110.	Foreign material in nose section	Visual
111.	Markings missing, misleading or unidentifiable	Visual
112.	Painting defective to the extent it shows the primer coat on bare metal	Visual
113.	Evidence of poor workmanship (see 3.5)	Visual
Minor:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

4.3.2.1.2 Nose Section Assembly Crate prior to being closed in (see dwg 8846374).

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Nose Section Assembly missing	Visual
	102. Static tube carton missing	Visual
	103. Bolts that secure nose section assembly to base loose or missing	Visual
	104. Metal strapping missing, loose	Visual
	105. Wood intermediate support missing, cracked or not secured	Visual
	106. Felt pads on intermediate support missing or partially detached	Visual
	107. Evidence of poor workmanship (see 3.5)	Visual
Minor:	None defined.	

4.3.2.1.3 Nose Section Assembly Crates Closed Up.

Categories	Characteristics	Method of Inspection
Critical:	None defined.	
Major:		
	101. Markings missing, misleading or unidentifiable	Visual
	102. Boards or plywood split or broken	Visual
	103. Nails protruding	Visual
	104. Shipping paper missing, torn or insecure	Visual
Minor:		
	201. Evidence of poor workmanship (see 3.5)	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

4.3.3 Testing. All tests shall be performed. Tests shall be performed in the order specified below:

Test	Test Classification
a. Continuity	Minor

This test is not considered destructive and samples so tested shall be returned to the production lot.

4.3.3.1 Continuity (see 3.4). Each nose assembly in the lot shall be tested in accordance with 4.4.1. If any item fails to comply with 3.4, the item shall be rejected and removed from the lot.

4.3.4 Acceptance inspection equipment.

4.3.4.1 Major characteristics and tests. Inspection and testing shall be performed with the acceptance inspection equipment, operating instructions, and calibration instructions specified on the Equipment Lists (EL) (see EL-8815553). When either of the conditions listed below exist, the contractor shall design required equipment or specify suitable commercial equipment and obtain approval prior to use on the contract.

a. Any deviation from equipment or procedures specified on the EL is desired (see 6.3).
b. The code "CD" is listed in the "Part or Identifying Number" column on the EL (see 6.1.2).

4.3.4.2 Minor characteristics and tests. Acceptance inspection equipment for minor characteristics is not specified on ELs. The acceptance inspection equipment, operating instructions and calibration instructions used by the contractor for minor classification inspection shall be approved by the Government representative authorized by the procuring agency.

4.4 Test methods. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.4.1 Continuity. The circuit continuity of the nose assembly shall be tested utilizing a commercial resistance meter and a simulated missile wiring harness (see Figure 1) with connector P1 of the simulated missile wiring harness connected to the simulated electric plug of the transponder, a closed circuit shall be obtained indicating that pin 47 of the transponder plug is grounded to the transponder. This circuit shall be from the transponder through the connectors (pin 47 only) through the meter and back to transponder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The nose assembly shall be packaged in accordance with dwg 8846374 using the specified moisture barrier.

5.1.2 Level C. The nose assembly shall be packaged in accordance with dwg 8846374 except that the moisture barrier may be omitted.

5.2 Packing.

5.2.1 Level A and C. If the nose assembly is shipped as part of the Warhead Section of the Nike-Hercules Guided Missile Trainer, it shall be packed in accordance with MIL-N-48820(PA). If the nose assembly is shipped separate it shall be packed according to dwg. 8846374 except that the static tube assembly will not be included. There shall be two small bags taped to the hoisting adapter. The bags will contain six fitted covers (8846052) and six screws (AN505-8R32). The nose assembly shall be packed in accordance with the minimum package and pack which will afford adequate protection against corrosion, deterioration, and physical damage during the shipment from supply source to the first receiving authority for immediate use. Shipping containers shall be snugly packed and constructed so as to insure acceptance by a common carrier or air express for safe transportation to the point of destination. Containers shall conform to the requirements of the Consolidated Freight Classification rules in effect at the time of shipment, except that fiberboard, when used, shall have a minimum Mullen Test of 275 pounds. Containers shall be able to withstand storage, rehandling, and reshipment without the necessity of repacking.

5.3 Marking. Marking shall be in accordance with dwg 8846374.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

6.1.1 Procurement requirements.

a. Title, number, and date of this specification.
b. Selection of applicable level of packaging and packing required (see 5.1 and 5.2).

6.1.2 Contract data requirements (see 4.3.4.1). Data specified in 4.3.4.1 will be delivered as identified on a numbered DD Form 1664 when required on a DD Form 1423 incorporated in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

6.2 Objective evidence. Records of contractor quality control and inspections which can be verified.

6.3 Acceptance inspection equipment (see 4.3.4.1). The contractor shall obtain approval from the Commander, Picatinny Arsenal, Dover, New Jersey 07801, ATTN: SARPA-QA-N-I.

6.4 Supersession data. This specification supersedes the requirements of Purchase Description X-PA-PD-2127 dated 9 March 1962.

Custodian:
Army - PA

Preparing activity:
Army - PA

Project No. 1135-A196

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

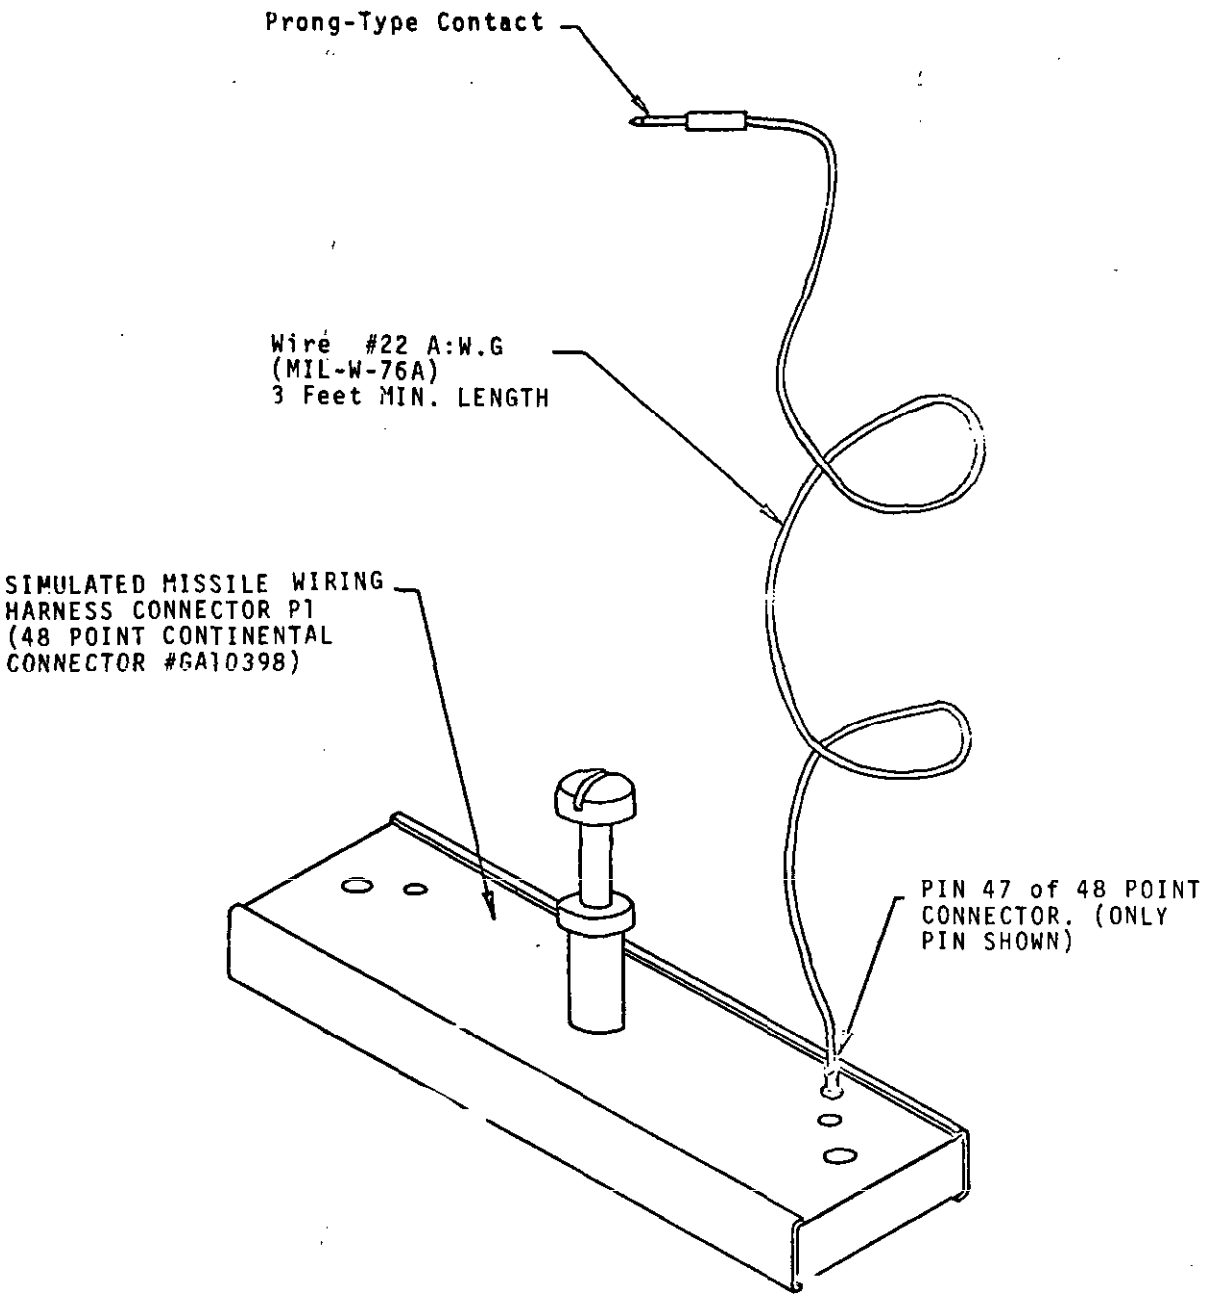


Figure 1. Simulated missile wiring harness assembly for transponder simulated electrical plug (XM-74 trainer)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1975 -603-766/0642

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-N-Q
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. *DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product* are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which *may be of use in improving this document.* If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

[ ] YES [ ] NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

(SUPERSEDES EDITION OF 1 JAN 68 WHICH MAY BE USED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:41Z
Check the source to verify that this is the current version before use.