INCH-POUND

MIL-PRF-83421/1C
24 January 2006
SUPERSEDING
MIL-PRF-83421/1B
9 July 2001


PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, METALLIZED PLASTIC FILM DIELECTRIC, DC AND AC, HERMETICALLY SEALED IN METAL CASES, ESTABLISHED RELIABILITY STYLES CRH01, CRH02, CRH03, CRH04, CRH05, CRH06, CRH07, CRH08, CRH09, AND CRH00

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-83421.

STYLES CRH06 THROUGH CRH00 INACTIVE FOR DESIGN AFTER 4 JANUARY 1980. USE CRH01 THROUGH CRH05

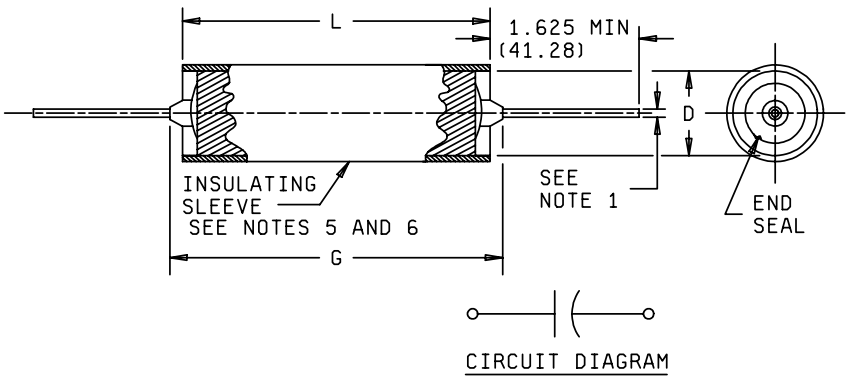

NOTES:
1. Number 22 AWG wire (.025 inch ± .002) for case diameters of .312 (7.92 mm) and less. Number 20 AWG wire (.032 inch ± .002) for case diameters of .400 (10.16 mm) and .500 (12.70 mm). Number 18 AWG wire (.040 inch ± .002) for case diameters of .562 (14.27 mm) and over.
2. Dimensions are in inches.
3. Metric equivalents in parenthesis are given for general information only.
4. See table I for additional dimensions.
5. Insulating sleeve shall extend beyond the capacitor body. Insulating sleeve thickness shall not exceed .005 (0.13 mm) inch.
6. Plastic insulating sleeve shall be transparent; marking shall be applied to the capacitor case.
7. Lead length may be a minimum of one inch (25.4 mm) long for use in tape and reel packaging, when specified in the ordering data.

FIGURE 1. Capacitor configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions, and dash numbers.

CRH01 AND CHR06 - 30 volts (DC rating)																
Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			Dash numbers 2/						AC ratings (for sinusoidal operation from -65 to +100°C) 3/					
	L ±.030 (0.76)	D +.020 (0.51) -.010 (0.25)	G, max	Capacitance tolerance value (in %)						0 to .4 kHz		At 4 kHz		At 40 kHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (in A)	Volts	Current (in A)	Volts	Current (in A)
0.001	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-001-	-002-	-003-	-004-	-005-	-006-	22.0	.001	22.0	.001	22.0	.006
0.0012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-007-	-008-	-009-	-010-	-011-	-012-	22.0	.001	22.0	.001	22.0	.007
0.0015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-013-	-014-	-015-	-016-	-017-	-018-	22.0	.001	22.0	.001	22.0	.008
0.0018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-019-	-020-	-021-	-022-	-023-	-024-	22.0	.001	22.0	.001	22.0	.010
0.002	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-025-	-026-	-027-	-028-	-029-	-030-	22.0	.001	22.0	.001	22.0	.011
0.0022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-031-	-032-	-033-	-034-	-035-	-036-	22.0	.001	22.0	.001	22.0	.012
0.0027	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-037-	-038-	-039-	-040-	-041-	-042-	22.0	.001	22.0	.002	22.0	.015
0.0033	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-043-	-044-	-045-	-046-	-047-	-048-	22.0	.001	22.0	.002	22.0	.018
0.0039	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-049-	-050-	-051-	-052-	-053-	-054-	22.0	.001	22.0	.002	22.0	.021
0.0047	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-055-	-056-	-057-	-058-	-059-	-060-	22.0	.001	22.0	.003	22.0	.026
0.005	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-061-	-062-	-063-	-064-	-065-	-066-	22.0	.001	22.0	.003	22.0	.028
0.0056	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-067-	-068-	-069-	-070-	-071-	-072-	22.0	.001	22.0	.003	22.0	.031
0.0068	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-073-	-074-	-075-	-076-	-077-	-078-	22.0	.001	22.0	.004	22.0	.037
0.0082	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-079-	-080-	-081-	-082-	-083-	-084-	22.0	.001	22.0	.005	22.0	.045
0.01	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-085-	-086-	-087-	-088-	-089-	-090-	22.0	.001	22.0	.006	22.0	.055
0.012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-091-	-092-	-093-	-094-	-095-	-096-	22.0	.001	22.0	.007	22.0	.066
0.015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-097-	-098-	-099-	-100-	-101-	-102-	22.0	.001	22.0	.008	22.0	.082
0.018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-103-	-104-	-105-	-106-	-107-	-108-	22.0	.001	22.0	.010	22.0	.10
0.02	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-109-	-110-	-111-	-112-	-113-	-114-	22.0	.001	22.0	.011	22.0	.11
0.022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-115-	-116-	-117-	-118-	-119-	-120-	22.0	.001	22.0	.012	22.0	.12
0.027	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-121-	-122-	-123-	-124-	-125-	-126-	22.0	.001	22.0	.015	22.0	.15
0.033	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-127-	-128-	-129-	-130-	-131-	-132-	22.0	.002	22.0	.018	22.0	.18
0.039	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-133-	-134-	-135-	-136-	-137-	-138-	22.0	.002	22.0	.021	22.0	.22
0.047	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-139-	-140-	-141-	-142-	-143-	-144-	22.0	.003	22.0	.026	22.0	.26
0.05	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-145-	-146-	-147-	-148-	-149-	-150-	22.0	.003	22.0	.028	22.0	.28
0.056	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-151-	-152-	-153-	-154-	-155-	-156-	22.0	.003	22.0	.031	22.0	.31
0.068	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	-157-	-158-	-159-	-160-	-161-	-162-	22.0	.004	22.0	.037	22.0	.37
0.082	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	-163-	-164-	-165-	-166-	-167-	-168-	22.0	.005	22.0	.045	22.0	.45
0.1	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	-169-	-170-	-171-	-172-	-173-	-174-	22.0	.006	22.0	.055	22.0	.55
0.12	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	-175-	-176-	-177-	-178-	-179-	-180-	22.0	.007	22.0	.066	22.0	.66
0.15	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	-181-	-182-	-183-	-184-	-185-	-186-	22.0	.008	22.0	.082	22.0	.83
0.18	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-373-	-374-	-375-	-376-	-377-	-378-	22.0	.010	22.0	.100	22.0	1.00
0.20	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-187-	-188-	-189-	-190-	-191-	-192-	22.0	.011	22.0	.110	20.0	1.00
0.22	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-193-	-194-	-195-	-196-	-197-	-198-	22.0	.012	22.0	.120	18.5	1.02
0.27	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-199-	-200-	-201-	-202-	-203-	-204-	22.0	.015	22.0	.150	17.0	1.15
0.33	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-205-	-206-	-207-	-208-	-209-	-210-	22.0	.018	22.0	.180	16.0	1.32
0.39	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-211-	-212-	-213-	-214-	-215-	-216-	22.0	.021	22.0	.21	15.0	1.46

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

Capacitance value (nom) (in µf)	Dimensions 1/ (in inches with mm in parentheses)			Dash numbers 2/						AC ratings (for sinusoidal operation from -65 to +100°C) 3/					
	L ±.030 (0.76)	D +.020 (0.51) -.010 (0.25)	G, max	Capacitance tolerance value (in %)						0 to .4 kHz		At 4 kHz		At 40 kHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (in A)	Volts	Current (in A)	Volts	Current (in A)
CRH01 AND CHR06 - 30 volts (DC rating)															
0.47	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-217-	-218-	-219-	-220-	-221-	-222-	22.0	.026	22.0	.26	14.0	1.65
0.50	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-223-	-224-	-225-	-226-	-227-	-228-	22.0	.028	22.0	.28	13.5	1.69
0.56	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-229-	-230-	-231-	-232-	-233-	-234-	22.0	.031	22.0	.31	12.9	1.81
0.68	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-235-	-236-	-237-	-238-	-239-	-240-	22.0	.037	22.0	.37	12.0	2.04
0.82	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-241-	-242-	-243-	-244-	-245-	-246-	22.0	.045	22.0	.45	10.0	2.05
1.0	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-247-	-248-	-249-	-250-	-251-	-252-	22.0	.055	22.0	.55	8.4	2.10
1.2	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-253-	-254-	-255-	-256-	-257-	-258-	22.0	.066	22.0	.66	7.2	2.15
1.5	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	-259-	-260-	-261-	-262-	-263-	-264-	22.0	.082	22.0	.83	5.8	2.17
1.8	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	-265-	-266-	-267-	-268-	-269-	-270-	22.0	.099	22.0	.99	4.8	2.20
2.0	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	-271-	-272-	-273-	-274-	-275-	-276-	22.0	.110	22.0	1.10	4.4	2.20
2.2	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	-277-	-278-	-279-	-280-	-281-	-282-	22.0	.12	22.0	1.21	4.0	2.20
2.7	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-385-	-386-	-387-	-388-	-389-	-390-	22.0	.15	22.0	1.49	3.3	2.20
3.0	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-289-	-290-	-291-	-292-	-293-	-294-	22.0	.17	22.0	1.65	2.9	2.20
3.3	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-295-	-296-	-297-	-298-	-299-	-300-	22.0	.18	22.0	1.82	2.7	2.20
3.9	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	-301-	-302-	-303-	-304-	-305-	-306-	22.0	.21	22.0	2.14	2.3	2.20
4.7	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-313-	-314-	-315-	-316-	-317-	-318-	22.0	.26	18.7	2.20	1.9	2.20
5.0	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-319-	-320-	-321-	-322-	-323-	-324-	22.0	.28	17.6	2.20	1.8	2.20
5.6	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-325-	-326-	-327-	-328-	-329-	-330-	22.0	.31	15.7	2.20	1.6	2.20
6.8	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	-331-	-332-	-333-	-334-	-335-	-336-	22.0	.37	13.0	2.20	1.3	2.20
8.0	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	-337-	-338-	-339-	-340-	-341-	-342-	22.0	.44	11.0	2.20	1.1	2.20
8.2	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	-343-	-344-	-345-	-346-	-347-	-348-	22.0	.45	10.7	2.20	1.1	2.20
10.0	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	-349-	-350-	-351-	-352-	-353-	-354-	22.0	.55	8.8	2.20	.88	2.20
12.0	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	-379-	-380-	-381-	-382-	-383-	-384-	22.0	.66	7.3	2.20	.73	2.20
15.0	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	-355-	-356-	-357-	-358-	-359-	-360-	22.0	.83	5.9	2.20	.59	2.20
20.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	-361-	-362-	-363-	-364-	-365-	-366-	22.0	1.10	4.4	2.20	.44	2.20
22.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	-367-	-368-	-369-	-370-	-371-	-372-	22.0	1.21	4.0	2.20	.40	2.20
CRH02 AND CHR07 - 50 volts (DC rating)															
0.001	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-001-	-002-	-003-	-004-	-005-	-006-	36.0	.001	36.0	.001	36.0	.009
0.0012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-007-	-008-	-009-	-010-	-011-	-012-	36.0	.001	36.0	.001	36.0	.011
0.0015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-013-	-014-	-015-	-016-	-017-	-018-	36.0	.001	36.0	.001	36.0	.013
0.0018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-019-	-020-	-021-	-022-	-023-	-024-	36.0	.001	36.0	.002	36.0	.016
0.002	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-025-	-026-	-027-	-028-	-029-	-030-	36.0	.001	36.0	.002	36.0	.018
0.0022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-031-	-032-	-033-	-034-	-035-	-036-	36.0	.001	36.0	.002	36.0	.020
0.0027	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-037-	-038-	-039-	-040-	-041-	-042-	36.0	.001	36.0	.002	36.0	.024
0.0033	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-043-	-044-	-045-	-046-	-047-	-048-	36.0	.001	36.0	.003	36.0	.030
0.0039	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-049-	-050-	-051-	-052-	-053-	-054-	36.0	.001	36.0	.004	36.0	.035

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

CRH02 AND CHR07 - 50 volts (DC rating)																
Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			Dash numbers 2/						AC ratings (for sinusoidal operation from -65 to +100°C) 3/					
	L ±.030 (0.76)	D +.020 (0.51) -.010 (0.25)	G, max	Capacitance tolerance value (in %)						0 to .4 kHz		At 4 kHz		At 40 kHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (in A)	Volts	Current (in A)	Volts	Current (in A)
0.0047	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-055-	-056-	-057-	-058-	-059-	-060-	36.0	.001	36.0	.004	36.0	.042
0.005	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-061-	-062-	-063-	-064-	-065-	-066-	36.0	.001	36.0	.005	36.0	.045
0.0056	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-067-	-068-	-069-	-070-	-071-	-072-	36.0	.001	36.0	.005	36.0	.050
0.0068	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-073-	-074-	-075-	-076-	-077-	-078-	36.0	.001	36.0	.006	36.0	.061
0.0082	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-079-	-080-	-081-	-082-	-083-	-084-	36.0	.001	36.0	.007	36.0	.074
0.01	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-085-	-086-	-087-	-088-	-089-	-090-	36.0	.001	36.0	.009	36.0	.090
0.012	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-091-	-092-	-093-	-094-	-095-	-096-	36.0	.001	36.0	.011	36.0	.11
0.015	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-097-	-098-	-099-	-100-	-101-	-102-	36.0	.001	36.0	.013	36.0	.14
0.018	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-103-	-104-	-105-	-106-	-107-	-108-	36.0	.002	36.0	.016	36.0	.16
0.02	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-109-	-110-	-111-	-112-	-113-	-114-	36.0	.002	36.0	.018	36.0	.18
0.022	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-115-	-116-	-117-	-118-	-119-	-120-	36.0	.002	36.0	.020	36.0	.20
0.027	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-121-	-122-	-123-	-124-	-125-	-126-	36.0	.002	36.0	.024	36.0	.24
0.033	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-127-	-128-	-129-	-130-	-131-	-132-	36.0	.003	36.0	.030	36.0	.30
0.039	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	-133-	-134-	-135-	-136-	-137-	-138-	36.0	.004	36.0	.035	36.0	.35
0.047	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	-139-	-140-	-141-	-142-	-143-	-144-	36.0	.004	36.0	.042	36.0	.42
0.05	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	-145-	-146-	-147-	-148-	-149-	-150-	36.0	.005	36.0	.045	36.0	.45
0.056	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	-151-	-152-	-153-	-154-	-155-	-156-	36.0	.005	36.0	.050	36.0	.50
0.068	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	-157-	-158-	-159-	-160-	-161-	-162-	36.0	.006	36.0	.061	34.0	.58
0.082	0.813 (20.65)	0.193 (4.90)	1.013 (25.73)	-163-	-164-	-165-	-166-	-167-	-168-	36.0	.007	36.0	.074	32.0	.66
0.1	0.813 (20.65)	0.193 (4.90)	1.013 (25.73)	-169-	-170-	-171-	-172-	-173-	-174-	36.0	.009	36.0	.090	30.0	.75
0.12	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-175-	-176-	-177-	-178-	-179-	-180-	36.0	.011	36.0	.11	30.0	.90
0.15	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-181-	-182-	-183-	-184-	-185-	-186-	36.0	.013	36.0	.14	26.0	.98
0.18	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	-187-	-188-	-189-	-190-	-191-	-192-	36.0	.016	36.0	.16	25.0	1.13
0.20	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	-193-	-194-	-195-	-196-	-197-	-198-	36.0	.018	36.0	.18	24.0	1.20
0.22	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	-199-	-200-	-201-	-202-	-203-	-204-	36.0	.020	36.0	.20	23.0	1.27
0.27	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-205-	-206-	-207-	-208-	-209-	-210-	36.0	.024	36.0	.24	19.0	1.28
0.33	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-211-	-212-	-213-	-214-	-215-	-216-	36.0	.030	36.0	.30	18.0	1.48
0.39	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-217-	-218-	-219-	-220-	-221-	-222-	36.0	.035	36.0	.35	17.0	1.66
0.47	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-223-	-224-	-225-	-226-	-227-	-228-	36.0	.042	36.0	.42	15.7	1.85
0.50	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-229-	-230-	-231-	-232-	-233-	-234-	36.0	.045	36.0	.45	15.2	1.90
0.56	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	-235-	-236-	-237-	-238-	-239-	-240-	36.0	.050	36.0	.50	14.4	2.01
0.68	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	-241-	-242-	-243-	-244-	-245-	-246-	36.0	.061	36.0	.61	14.0	2.38
0.82	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-247-	-248-	-249-	-250-	-251-	-252-	36.0	.074	36.0	.74	12.0	2.46
1.0	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-253-	-254-	-255-	-256-	-257-	-258-	36.0	.090	36.0	.90	10.0	2.50
1.2	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-259-	-260-	-261-	-262-	-263-	-264-	36.0	.11	36.0	1.08	9.1	2.73
1.5	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-265-	-266-	-267-	-268-	-269-	-270-	36.0	.14	36.0	1.35	7.7	2.90
1.8	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-271-	-272-	-273-	-274-	-275-	-276-	36.0	.16	36.0	1.62	6.6	3.00

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			Dash numbers 2/						AC ratings (for sinusoidal operation from -65 to +100°C) 3/					
	L ±.030 (0.76)	D +.020 (0.51) -.010 (0.25)	G, max	Capacitance tolerance value (in %)						0 to .4 kHz		At 4 kHz		At 40 kHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (in A)	Volts	Current (in A)	Volts	Current (in A)
CRH02 AND CHR07 - 50 volts (DC rating)															
2.0	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	-277-	-278-	-279-	-280-	-281-	-282-	36.0	.18	36.0	1.80	6.2	3.10
2.2	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	-283-	-284-	-285-	-286-	-287-	-288-	36.0	.20	36.0	1.98	5.8	3.20
2.7	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-289-	-290-	-291-	-292-	-293-	-294-	36.0	.24	36.0	2.43	5.0	3.34
3.0	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-295-	-296-	-297-	-298-	-299-	-300-	36.0	.27	36.0	2.70	4.5	3.40
3.3	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-301-	-302-	-303-	-304-	-305-	-306-	36.0	.30	36.0	2.97	4.2	3.50
3.9	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	-307-	-308-	-309-	-310-	-311-	-312-	36.0	.35	36.0	3.51	3.7	3.60
4.7	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	-319-	-320-	-321-	-322-	-323-	-324-	36.0	.42	31.0	3.60	3.1	3.60
5.0	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	-325-	-326-	-327-	-328-	-329-	-330-	36.0	.45	29.0	3.60	2.9	3.60
5.6	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	-331-	-332-	-333-	-334-	-335-	-336-	36.0	.50	26.0	3.60	2.6	3.60
6.8	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	-337-	-338-	-330-	-340-	-341-	-342-	36.0	.61	21.2	3.60	2.1	3.60
8.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	-343-	-344-	-345-	-346-	-347-	-348-	36.0	.72	18.0	3.60	1.8	3.60
8.2	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	-349-	-350-	-351-	-352-	-353-	-354-	36.0	.74	17.6	3.60	1.8	3.60
10.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	-355-	-356-	-357-	-358-	-359-	-360-	36.0	.90	14.4	3.60	1.4	3.60
CRH03 AND CRH08 - 100 VOLTS (DC RATING)															
0.001	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-001-	-002-	-003-	-004-	-005-	-006-	60.0	.001	60.0	.002	60.0	.015
0.0012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-007-	-008-	-009-	-010-	-011-	-012-	60.0	.001	60.0	.002	60.0	.018
0.0015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-013-	-014-	-015-	-016-	-017-	-018-	60.0	.001	60.0	.002	60.0	.022
0.0018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-019-	-020-	-021-	-022-	-023-	-024	60.0	.001	60.0	.003	60.0	.027
0.002	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-025-	-026-	-027-	-028-	-029-	-030-	60.0	.001	60.0	.003	60.0	.030
0.0022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-031-	-032-	-033-	-034-	-035-	-036-	60.0	.001	60.0	.003	60.0	.033
0.0027	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-037-	-038-	-039-	-040-	-041-	-042-	60.0	.001	60.0	.004	60.0	.041
0.0033	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-043-	-044-	-045-	-046-	-047-	-048-	60.0	.001	60.0	.005	60.0	.050
0.0039	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-049-	-050-	-051-	-052-	-053-	-054-	60.0	.001	60.0	.006	60.0	.058
0.0047	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-055-	-056-	-057-	-058-	-059-	-060-	60.0	.001	60.0	.007	60.0	.071
0.005	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-061-	-062-	-063-	-064-	-065-	-066-	60.0	.001	60.0	.008	60.0	.075
0.0056	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	-067-	-068-	-069-	-070-	-071-	-072-	60.0	.001	60.0	.008	60.0	.084
0.0068	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-073-	-074-	-075-	-076-	-077-	-078-	60.0	.001	60.0	.010	60.0	.10
0.0082	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-079-	-080-	-081-	-082-	-083-	-084-	60.0	.001	60.0	.012	60.0	.12
0.01	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	-085-	-086-	-087-	-088-	-089-	-090-	60.0	.002	60.0	.015	60.0	.15
0.012	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	-091-	-092-	-093-	-094-	-095-	-096-	60.0	.002	60.0	.018	59.0	.18
0.015	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	-097-	-098-	-099-	-100-	-101-	-102-	60.0	.002	60.0	.022	58.0	.22
0.018	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	-103-	-104-	-105-	-106-	-107-	-108-	60.0	.003	60.0	.027	57.0	.26
0.02	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	-109-	-110-	-111-	-112-	-113-	-114-	60.0	.003	60.0	.030	55.0	.28
0.022	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	-115-	-116-	-117-	-118-	-119-	-120-	60.0	.003	60.0	.033	53.0	.29
0.027	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	-121-	-122-	-123-	-124-	-125-	-126-	60.0	.004	60.0	.041	51.0	.34

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

CRH03 AND CRH08 - 100 VOLTS (DC RATING)																
Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			Dash numbers 2/						AC ratings (for sinusoidal operation from -65 to +100°C) 3/					
	L ±.030 (0.76)	D +.020 (0.51) -.010 (0.25)	G, max	Capacitance tolerance value (in %)						0 to .4 kHz		At 4 kHz		At 40 kHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (in A)	Volts	Current (in A)	Volts	Current (in A)
0.033	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	-127-	-128-	-129-	-130-	-131-	-132-	60.0	.005	60.0	.050	50.0	.41
0.039	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-133-	-134-	-135-	-136-	-137-	-138-	60.0	.006	60.0	.059	48.0	.47
0.047	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-139-	-140-	-141-	-142-	-143-	-144-	60.0	.007	60.0	.070	47.0	.55
0.050	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-145-	-146-	-147-	-148-	-149-	-150-	60.0	.008	60.0	.075	46.0	.58
0.056	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-151-	-152-	-153-	-154-	-155-	-156-	60.0	.008	60.0	.084	46.0	.64
0.068	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	-157-	-158-	-159-	-160-	-161-	-162-	60.0	.010	60.0	.10	42.0	.71
0.082	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-163-	-164-	-165-	-166-	-167-	-168-	60.0	.012	60.0	.12	38.0	.78
0.10	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-169-	-170-	-171-	-172-	-173-	-174-	60.0	.015	60.0	.15	36.0	.90
0.12	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-175-	-176-	-177-	-178-	-179-	-180-	60.0	.018	60.0	.18	35.0	1.05
0.15	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-181-	-182-	-183-	-184-	-185-	-186-	60.0	.022	60.0	.23	33.0	1.24
0.18	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-187-	-188-	-189-	-190-	-191-	-192-	60.0	.027	60.0	.27	31.0	1.40
0.20	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-193-	-194-	-195-	-196-	-197-	-198-	60.0	.030	60.0	.30	30.0	1.50
0.22	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-199-	-200-	-201-	-202-	-203-	-204-	60.0	.033	60.0	.33	27.0	1.50
0.27	1.063 (27.00)	0.312 (7.92)	1.263 (32.08)	-205-	-206-	-207-	-208-	-209-	-210-	60.0	.041	60.0	.41	24.0	1.62
0.33	1.063 (27.00)	0.312 (7.92)	1.263 (32.08)	-211-	-212-	-213-	-214-	-215-	-216-	60.0	.050	60.0	.50	23.0	1.90
0.39	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-217-	-218-	-219-	-220-	-221-	-222-	60.0	.058	60.0	.59	22.0	2.15
0.47	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-223-	-224-	-225-	-226-	-227-	-228-	60.0	.071	60.0	.71	21.0	2.47
0.50	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-229-	-230-	-231-	-232-	-233-	-234-	60.0	.075	60.0	.75	20.0	2.50
0.56	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-235-	-236-	-237-	-238-	-239-	-240-	60.0	.084	60.0	.84	19.0	2.64
0.68	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	-241-	-242-	-243-	-244-	-245-	-246-	60.0	.10	60.0	1.02	16.0	2.72
0.82	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	-247-	-248-	-249-	-250-	-251-	-252-	60.0	.12	60.0	1.23	14.0	2.87
1.0	1.125 (28.58)	0.562 (14.27)	1.325 (33.66)	-253-	-254-	-255-	-256-	-257-	-258-	60.0	.15	60.0	1.50	12.0	3.00
1.2	1.125 (28.58)	0.562 (14.27)	1.325 (33.66)	-259-	-260-	-261-	-262-	-263-	-264-	60.0	.18	60.0	1.80	11.0	3.25
1.5	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	-265-	-266-	-267-	-268-	-269-	-270-	60.0	.23	60.0	2.26	10.0	3.75
2.0	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	-271-	-272-	-273-	-274-	-275-	-276-	60.0	.30	60.0	3.00	8.1	.4.10
2.2	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	-277-	-278-	-279-	-280-	-281-	-282-	60.0	.33	60.0	3.31	7.5	4.12
2.7	1.875 (47.63)	0.670 (17.02)	2.075 (40.01)	-283-	-284-	-285-	-286-	-287-	-288-	60.0	.41	60.0	4.05	6.5	4.40
3.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	-289-	-290-	-291-	-292-	-293-	-294-	60.0	.45	60.0	4.51	6.0	4.51
3.3	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	-295-	-296-	-297-	-298-	-299-	-300-	60.0	.50	55.0	4.73	5.5	4.55
3.9	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-301-	-302-	-303-	-304-	-305-	-306-	60.0	.59	49.0	4.90	5.0	4.90
4.7	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-313-	-314-	-315-	-316-	-317-	-318-	60.0	.71	43.0	5.00	4.3	5.00
5.0	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-319-	-320-	-321-	-322-	-323-	-324-	60.0	.75	40.0	5.00	4.0	5.00
5.6	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-325-	-326-	-327-	-328-	-329-	-330-	60.0	.84	36.0	5.00	3.6	5.00
6.8	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	-331-	-332-	-333-	-334-	-335-	-336-	60.0	1.02	29.0	5.00	3.0	5.00
8.0	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	-337-	-338-	-339-	-340-	-341-	-342-	60.0	1.20	25.0	5.00	2.5	5.00
8.2	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	-343-	-344-	-345-	-346-	-347-	-348-	60.0	1.23	24.4	5.00	2.4	5.00
10.0	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	-349-	-350-	-351-	-352-	-353-	-354-	60.0	1.50	20.0	5.00	2.0	5.00

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

CRH04 AND CRH09 - 200 VOLTS (DC RATING)																
Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			Dash numbers 2/						AC ratings (for sinusoidal operation from -65 to +100°C) 3/					
	L ±.030 (0.76)	D +.020 (0.51) -.010 (0.25)	G, max	Capacitance tolerance value (in %)						0 to .4 kHz		At 4 kHz		At 40 kHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (in A)	Volts	Current (in A)	Volts	Current (in A)
0.001	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-001-	-002-	-003-	-004-	-005-	-006-	120.0	.001	120.0	.003	80.0	.020
0.0012	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-007-	-008-	-009-	-010-	-011-	-012-	120.0	.001	120.0	.004	80.0	.024
0.0015	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-013-	-014-	-015-	-016-	-017-	-018-	120.0	.001	120.0	.004	80.0	.030
0.0018	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-019-	-020-	-021-	-022-	-023-	-024-	120.0	.005	120.0	.005	80.0	.036
0.002	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-025-	-026-	-027-	-028-	-029-	-030-	120.0	.001	120.0	.006	80.0	.040
0.0022	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-031-	-032-	-033-	-034-	-035-	-036-	120.0	.001	120.0	.007	80.0	.044
0.0027	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-037-	-038-	-039-	-040-	-041-	-042-	120.0	.001	120.0	.008	80.0	.054
0.0033	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-043-	-044-	-045-	-046-	-047-	-048-	120.0	.001	120.0	.010	80.0	.066
0.0039	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-049-	-050-	-051-	-052-	-053-	-054-	120.0	.001	120.0	.012	80.0	.078
0.0047	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-055-	-056-	-057-	-058-	-059-	-060-	120.0	.001	120.0	.014	80.0	.094
0.005	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-061-	-062-	-063-	-064-	-065-	-066-	120.0	.002	120.0	.015	80.0	.10
0.0056	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-067-	-068-	-069-	-070-	-071-	-072-	120.0	.002	120.0	.017	80.0	.11
0.0068	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	-073-	-074-	-075-	-076-	-077-	-078-	120.0	.002	120.0	.020	80.0	.14
0.0082	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-079-	-080-	-081-	-082-	-083-	-084-	120.0	.002	120.0	.025	80.0	.16
0.01	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-085-	-086-	-087-	-088-	-089-	-090-	120.0	.003	120.0	.030	80.0	.20
0.012	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-091-	-092-	-093-	-094-	-095-	-096-	120.0	.004	120.0	.036	78.0	.23
0.015	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	-097-	-098-	-099-	-100-	-101-	-102-	120.0	.004	120.0	.045	76.0	.29
0.018	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-103-	-104-	-105-	-106-	-107-	-108-	120.0	.005	120.0	.054	74.0	.33
0.02	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-109-	-110-	-111-	-112-	-113-	-114-	120.0	.006	120.0	.060	71.0	.36
0.022	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-115-	-116-	-117-	-118-	-119-	-120-	120.0	.007	120.0	.066	68.0	.37
0.027	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-121-	-122-	-123-	-124-	-125-	-126-	120.0	.008	120.0	.081	65.0	.44
0.033	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-127-	-128-	-129-	-130-	-131-	-132-	120.0	.010	120.0	.099	62.0	.51
0.039	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-133-	-134-	-135-	-136-	-137-	-138-	120.0	.012	120.0	.12	60.0	.59
0.047	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-139-	-140-	-141-	-142-	-143-	-144-	120.0	.014	120.0	.14	57.0	.67
0.05	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	-145-	-146-	-147-	-148-	-149-	-150-	120.0	.015	120.0	.15	56.0	.70
0.056	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	-151-	-152-	-153-	-154-	-155-	-156-	120.0	.017	120.0	.17	56.0	.78
0.068	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	-157-	-158-	-159-	-160-	-161-	-162-	120.0	.020	120.0	.20	50.0	.85
0.082	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	-163-	-164-	-165-	-166-	-167-	-168-	120.0	.025	120.0	.25	44.0	.90
0.1	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	-169-	-170-	-171-	-172-	-173-	-174-	120.0	.030	120.0	.30	42.0	1.10
0.12	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	-175-	-176-	-177-	-178-	-179-	-180-	120.0	.036	120.0	.36	40.0	1.20
0.15	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-181-	-182-	-183-	-184-	-185-	-186-	120.0	.045	120.0	.45	36.0	1.34
0.18	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	-187-	-188-	-189-	-190-	-191-	-192-	120.0	.054	120.0	.54	34.0	1.54
0.20	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	-193-	-194-	-195-	-196-	-197-	-198-	120.0	.060	120.0	.60	33.0	1.65
0.22	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	-199-	-200-	-201-	-202-	-203-	-204-	120.0	.066	120.0	.66	32.0	1.76
0.27	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-205-	-206-	-207-	-208-	-209-	-210-	120.0	.081	120.0	.81	29.0	1.96
0.33	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-211-	-212-	-213-	-214-	-215-	-216-	120.0	.099	120.0	.99	28.0	2.31

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			Dash numbers 2/						AC ratings (for sinusoidal operation from -65 to +100°C) 3/					
	L ±.030 (0.76)	D +.020 (0.51) -.010 (0.25)	G, max	Capacitance tolerance value (in %)						0 to .4 kHz		At 4 kHz		At 40 kHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (in A)	Volts	Current (in A)	Volts	Current (in A)
CRH04 AND CRH09 - 200 VOLTS (DC RATING)															
0.39	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-217-	-218-	-219-	-220-	-221-	-222-	120.0	.12	120.0	1.17	27.0	2.63
0.47	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-223-	-224-	-225-	-226-	-227-	-228-	120.0	.14	120.0	1.41	26.0	3.06
0.50	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-229-	-230-	-231-	-232-	-233-	-234-	120.0	.15	120.0	1.50	25.0	3.13
0.56	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-235-	-236-	-237-	-238-	-239-	-240-	120.0	.17	120.0	1.61	23.0	3.17
0.68	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	-241-	-242-	-243-	-244-	-245-	-246-	120.0	.20	120.0	1.87	20.0	3.40
0.82	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	-247-	-248-	-249-	-250-	-251-	-252-	120.0	.25	120.0	2.05	18.0	3.70
1.0	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	-253-	-254-	-255-	-256-	-257-	-258-	120.0	.30	120.0	2.25	15.0	3.75
1.2	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	-259-	-260-	-261-	-262-	-263-	-264-	120.0	.36	120.0	2.61	13.5	4.05
1.5	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	-265-	-266-	-267-	-268-	-269-	-270-	120.0	.45	120.0	3.20	12.0	4.50
1.8	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-271-	-272-	-273-	-274-	-275-	-276-	120.0	.54	110.0	3.74	11.0	5.00
2.0	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-277-	-278-	-279-	-280-	-281-	-282-	120.0	.60	100.0	4.05	10.0	5.00
2.2	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-283-	-284-	-285-	-286-	-287-	-288-	120.0	.66	90.5	4.20	9.1	5.00
2.5	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-289-	-290-	-291-	-292-	-293-	-294-	120.0	.75	80.0	4.31	8.0	5.00
2.7	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-295-	-296-	-297-	-298-	-299-	-300-	120.0	.81	77.0	4.60	7.7	5.20
3.0	1.875 (47.63)	1.000 (25.40)	2.075 (52.71)	-301-	-302-	-303-	-304-	-305-	-306-	120.0	.90	70.0	5.04	7.0	5.27
3.3	1.875 (47.63)	1.000 (25.40)	2.075 (52.71)	-307-	-308-	-309-	-310-	-311-	-312-	120.0	.99	65.0	5.21	6.5	5.36
3.9	2.375 (60.33)	1.000 (25.40)	2.575 (65.41)	-313-	-314-	-315-	-316-	-317-	-318-	120.0	1.20	55.0	5.39	5.5	5.40
CRH05 AND CRH00 - 400 VOLTS (DC RATING)															
0.001	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-001-	-002-	-003-	-004-	-005-	-006-	240.0	.001	240.0	.006	100.0	.025
0.0012	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-007-	-008-	-009-	-010-	-011-	-012-	240.0	.001	240.0	.007	100.0	.030
0.0015	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-013-	-014-	-015-	-016-	-017-	-018-	240.0	.001	240.0	.009	100.0	.037
0.0018	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-019-	-020-	-021-	-022-	-023-	-024-	240.0	.001	240.0	.011	100.0	.045
0.002	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-025-	-026-	-027-	-028-	-029-	-030-	240.0	.001	240.0	.012	100.0	.050
0.0022	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	-031-	-032-	-033-	-034-	-035-	-036-	240.0	.001	240.0	.013	100.0	.055
0.0027	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	-037-	-038-	-039-	-040-	-041-	-042-	240.0	.002	240.0	.016	100.0	.068
0.0033	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	-043-	-044-	-045-	-046-	-047-	-048-	240.0	.002	240.0	.020	100.0	.083
0.0039	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	-049-	-050-	-051-	-052-	-053-	-054-	240.0	.002	240.0	.023	100.0	.097
0.0047	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	-055-	-056-	-057-	-058-	-059-	-060-	240.0	.003	240.0	.028	100.0	.12
0.005	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	-061-	-062-	-063-	-064-	-065-	-066-	240.0	.003	240.0	.030	100.0	.13
0.0056	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	-067-	-068-	-069-	-070-	-071-	-072-	240.0	.003	240.0	.034	100.0	.14
0.0068	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-073-	-074-	-075-	-076-	-077-	-078-	240.0	.004	240.0	.041	100.0	.17
0.0082	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-079-	-080-	-081-	-082-	-083-	-084-	240.0	.005	240.0	.049	100.0	.21
0.01	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-085-	-086-	-087-	-088-	-089-	-090-	240.0	.006	240.0	.060	100.0	.25
0.012	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	-091-	-092-	-093-	-094-	-095-	-096-	240.0	.007	240.0	.072	100.0	.30
0.015	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	-097-	-098-	-099-	-100-	-101-	-102-	240.0	.009	240.0	.090	94.0	.35
0.018	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-103-	-104-	-105-	-106-	-107-	-108-	240.0	.011	240.0	.11	90.0	.41

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions, and dash numbers - Continued.

CRH05 AND CRH00 - 400 VOLTS (DC RATING)																
Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			Dash numbers 2/						AC ratings (for sinusoidal operation from -65 to +100°C) 3/					
	L ±.030 (0.76)	D +.020 (0.51) -.010 (0.25)	G, max	Capacitance tolerance value (in %)						0 to .4 kHz		At 4 kHz		At 40 kHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (in A)	Volts	Current (in A)	Volts	Current (in A)
0.02	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-271-	-272-	-273-	-274-	-275-	-276-	240.0	.012	240.0	.12	88.0	.44
0.022	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-109-	-110-	-111-	-112-	-113-	-114-	240.0	.013	240.0	.13	85.0	.47
0.027	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-115-	-116-	-117-	-118-	-119-	-120-	240.0	.016	240.0	.16	81.0	.55
0.033	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-121-	-122-	-123-	-124-	-125-	-126-	240.0	.020	240.0	.20	78.0	.65
0.039	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	-127-	-128-	-129-	-130-	-131-	-132-	240.0	.023	240.0	.23	75.0	.73
0.047	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	-133-	-134-	-135-	-136-	-137-	-138-	240.0	.028	240.0	.28	71.0	.83
0.05	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	-139-	-140-	-141-	-142-	-143-	-144-	240.0	.030	240.0	.30	70.0	.88
0.056	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	-145-	-146-	-147-	-148-	-149-	-150-	240.0	.034	240.0	.34	67.5	.95
0.068	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	-151-	-152-	-153-	-154-	-155-	-156-	240.0	.041	240.0	.41	60.0	1.02
0.082	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-157-	-158-	-159-	-160-	-161-	-162-	240.0	.049	240.0	.49	50.0	1.03
0.10	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-163-	-164-	-165-	-166-	-167-	-168-	240.0	.060	240.0	.60	46.0	1.20
0.12	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	-169-	-170-	-171-	-172-	-173-	-174-	240.0	.072	240.0	.72	44.5	1.34
0.15	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	-175-	-176-	-177-	-178-	-179-	-180-	240.0	.090	240.0	.83	40.0	1.50
0.18	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-277-	-278-	-279-	-280-	-281-	-282-	240.0	.11	240.0	.95	38.0	1.70
0.20	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-181-	-182-	-183-	-184-	-185-	-186-	240.0	.12	240.0	1.03	37.0	1.85
0.22	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	-187-	-188-	-189-	-190-	-191-	-192-	240.0	.13	240.0	1.10	35.0	1.93
0.27	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	-193-	-194-	-195-	-196-	-197-	-198-	240.0	.16	240.0	1.21	33.0	2.24
0.33	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	-199-	-200-	-201-	-202-	-203-	-204-	240.0	.20	240.0	1.32	32.0	2.65
0.39	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	-205-	-206-	-207-	-208-	-209-	-210-	240.0	.23	240.0	1.48	32.0	3.14
0.47	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	-211-	-212-	-213-	-214-	-215-	-216-	240.0	.28	240.0	1.68	31.0	3.64
0.50	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	-217-	-218-	-219-	-220-	-221-	-222-	240.0	.30	240.0	1.75	30.0	3.75
0.56	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	-223-	-224-	-225-	-226-	-227-	-228-	240.0	.34	240.0	1.92	29.0	4.05
0.68	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-229-	-230-	-231-	-232-	-233-	-234-	240.0	.41	240.0	2.26	26.0	4.50
0.82	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-235-	-236-	-237-	-238-	-239-	-240-	240.0	.49	234.0	2.63	23.4	4.80
1.0	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	-241-	-242-	-243-	-244-	-245-	-246-	240.0	.60	208.0	3.00	20.8	5.20
1.2	1.875 (47.63)	1.000 (25.4)	2.075 (52.71)	-247-	-248-	-249-	-250-	-251-	-252-	240.0	.72	183.0	3.48	18.3	5.50
1.5	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	-253-	-254-	-255-	-256-	-257-	-258-	240.0	.90	160.0	4.14	16.0	6.00
1.8	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	-259-	-260-	-261-	-262-	-263-	-264-	240.0	1.08	150.0	4.69	15.0	6.80
2.0	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	-265-	-266-	-267-	-268-	-269-	-270-	240.0	1.20	140.0	5.00	14.0	7.00

1/ L and D dimensions are bare case dimensions (see figure 1).
2/ The complete dash number will include the applicable letter completing the style designator (CRH01 = 1, CRH02 = 2, etc.) as a prefix and the applicable FR level symbol (M, P, R, or S) as a suffix.
3/ For +125°C operation, linearly derate +100°C rating by 50 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Case material: Nonmagnetic.

Leads:

* .500 inch (12.70 mm) and smaller case diameters: Composition W and final finish 32 of MIL-STD-1276. Composition N and final finish 32 of MIL-STD-1276 may be furnished when specified in contract or order (see MIL-PRF-83421 ordering data).

* .562 inch (14.27 mm) and larger case diameters: Composition C and final finish 32 of MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Rated voltage: AC (see table I), DC (see table I and table II).

TABLE II. DC ratings.

Styles	Volts, dc
CRH01, CRH06	30
CRH02, CRH07	50
CRH03, CRH08	100
CRH04, CRH09	200
CRH05, CRH00	400

Operating temperature range: -65°C to +100°C; derate linearly from +100°C to 50 percent of rated voltage at +125°C.

Failure rate (FR) level: M (1.0%), P (0.1%), R (0.01%), and S (0.001%) (established at dc rated voltage at +100°C).

Burn-in (styles CRH01 through CRH05 only): 140 percent of dc rated voltage shall be applied for 48 hours minimum at +125°C +4°C, -0°C.

Thermal shock: Method 107 of MIL-STD-202, test condition B.

Styles CRH01 through CRH05: 10 cycles.

Styles CRH06 through CRH00: 5 cycles.


Seal: Method 112 of MIL-STD-202, test condition C, procedure IIIa with the following exceptions and details: a bomb pressure of 45 ±5 lbf/in^2 (gage), exposure time of 1 hour +1 hour, -0 hour, and dwell time of 1 hour maximum. The reject limit for styles CRH01 through CRH05 is R_1 = 1 X 10^{-6} atm cm^3/s and R_1 = 1 X 10^{-5} atm cm^3/s for styles CRH06 through CRH00. Upon completion of test condition C, perform either test condition A, test condition B with mineral oil, or test condition D.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202.

Terminal to terminal:

AC: 100 Hz ±10 Hz square wave, peak-to-peak voltage, three times dc rated voltage for 60 seconds, minimum but need not exceed 800 V peak-to-peak.

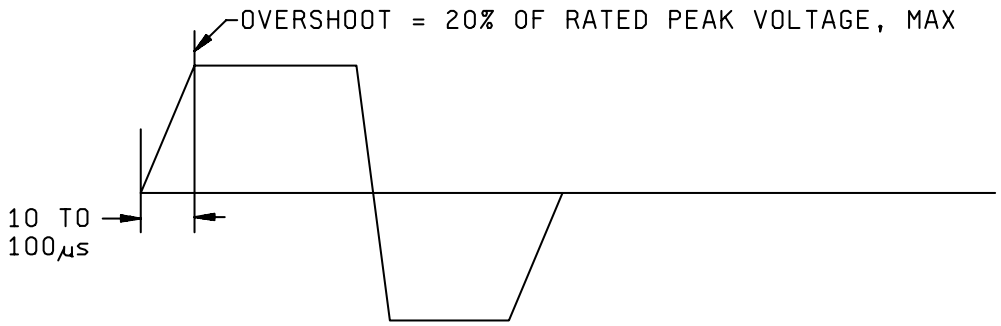

DC: 200 percent of dc rated voltage for 60 seconds, minimum.

Insulation resistance (IR): Method 302 of MIL-STD-202. Charge time 5 minutes, maximum; however, for capacitance values greater than 1.0 µF, an additional 1 minute per µF is permitted.

* Terminal to terminal (dc rated voltage): See table III.

Terminals to case: 10,000 megohms, minimum.

* TABLE III. Insulation resistance versus capacitance value.

Styles	Temperature	Capacitance	Minimum insulation resistance (terminal to terminal)
CHR01, CHR02, CHR03, CHR04, CHR05	+25°C	0µF to .1µF	3,000,000 megohms
		Greater than .1µF	300,000 megohm-microfarads
	+100°C	0µF to .1µF	300,000 megohms
		Greater than .1µF	30,000 megohm-microfarads
	+125°C	0µF to .1µF	20,000 megohms
		Greater than .1µF	2,000 megohm-microfarads
CHR06, CHR07, CHR08, CHR09, CHR00	+25°C	0µF to .1µF	1,000,000 megohms
		Greater than .1µF	100,000 megohm-microfarads
	+100°C	0µF to .1µF	50,000 megohms
		Greater than .1µF	5,000 megohm-microfarads
	+125°C	0µF to .1µF	10,000 megohms
		Greater than .1µF	1,000 megohm-microfarads

Dissipation factor (DF): 0.15 percent maximum.

Dielectric absorption: 0.1 percent, maximum.

Barometric pressure (reduced): Method 105 of MIL-STD-202, condition D (100,000 feet). 125 percent of dc rated voltage applied. See MIL-PRF-83421 for voltage limitations.

Vibration, random (optional): In accordance with MIL-PRF-83421 when ordered with "-" replaced with "H" in the PIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

Immersion: Method 104 of MIL-STD-202, test condition C.

DWV:

Insulating sleeves: Greater than 4,000 volts, dc.

Terminal to terminal: 200 percent of dc rated voltage.

Terminals to case: 200 percent of dc rated voltage.

IR:

Insulating sleeves: 10,000 megohms, minimum.

Terminal to terminal: Not less than 50 percent of initial requirement.

Terminals to case: 5,000 megohms, minimum.

Δ C:

Styles CRH01 through CRH05: Maximum of $\pm$0.25 percent.

Styles CRH06 through CRH00: Maximum of $\pm$1.0 percent.

DF: 0.15 percent.

Moisture resistance: Method 106 of MIL-STD-202.

DWV, IR, ΔC, and DF: Same as for immersion.

Low temperature life: In accordance with MIL-PRF-83421, except measurements shall be made at the following temperatures.

t_1 = +25°C: Record initial capacitance, dissipation factor, and insulation resistance.

t_2 = - 65°C: 48 hours, rated dc voltage applied.

t_3 = Maximum operating temperature: 2 hours rated dc voltage applied (allow for derating).

t_4 = +25°C: Record capacitance, dissipation factor, and insulation resistance. Limits of change shall be as specified in table IV.

TABLE IV. Post measurement limits.

t_1 to t_4	Styles CRH01 through CRH05	Styles CRH06 through CRH00
Capacitance	$\pm$ 0.5%	$\pm$ 1.0%
Dissipation factor	0.15% maximum	0.15% maximum
Insulation resistance	Within initial requirements	Within initial requirement

Resistance to soldering heat: Method 210 of MIL-STD-202, condition B.

Δ C: Maximum of $\pm$ 0.25 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

Temperature coefficient: In accordance with MIL-PRF-83421. Capacitance shall be measured at the temperatures specified in table V.

TABLE V. Capacitance changes.

Temperature 1/	Styles CRH01 through CRH05	Styles CRH06 through CRH00
t_3 to t_2	-1.0% to +1.2%	± 2.0%
t_3 to t_4	-2.5% to 0%	-2.5% to 0%
t_3 to t_1 or t_5	± .25%	± .25%

1/ t_1 = +25°C ±3°C
t_2 = +125°C ±3°C
t_3 = +25°C ±3°C
t_4 = -55°C +0°C, -3°C
t_5 = +25°C ±3°C

Life (at +100°C): Method 108 of MIL-STD-202.

Accelerated condition: 140 percent of dc rated voltage.

Rated condition: 100 percent of dc rated voltage.

IR:

Terminal to terminal: Not less than 33.3 percent of initial requirement.

Terminals to case: 5,000 megohms, minimum.

ΔC:

Styles CRH01 through CRH05: Maximum of ± 2.0 percent.

Styles CRH06 through CRH00: Maximum of ± 5.0 percent.

DF (at +25°C) after life:

Styles CRH01 through CRH05: 0.25 percent, maximum.

Styles CRH06 through CRH00: 0.35 percent, maximum.

AC conditioning: In accordance with MIL-PRF-83421.

Test samples shall be in accordance with table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

TABLE VI. AC conditioning test samples.

DC rated voltage (volts)	Capacitance range (μF)	Number samples 1/	40 kHz
30	.001 to 22.0	10	At rated voltage or current in accordance with table I
50	.001 to 10.0	10	
100	.001 to 10.0	10	
200	.001 to 3.9	10	
400	.001 to 2.0	10	

1/ Samples shall include five of the lowest and five of the highest capacitance values manufactured during the previous 6 months. If only one capacitance value was manufactured, ten samples of that value shall be tested.

Supersession information: For 30 volt units, PINs -283-, -284-, -285-, -286-, -287-, and -288- are hereby superseded. For similar but not necessarily interchangeable items; see PINs -385-, -386-, -387-, -388-, -389-, and -390-.

Marking: In accordance with MIL-PRF-83421.

Part or Identifying Number (PIN): Consists of the basic number of this specification sheet with a dash number coded as shown in the following:

M83421/01- 1 123 M

Specification sheet number
(Replace "-" with "H" for random vibration option)

Single digit designating style (i.e.,
1 = CRH01; 2 - CRH02; 3 = CRH03; 4 = CRH04;
5 = CRH05; 6 = CRH06; 7 = CRH07; 8 = CRH08;
9 = CRH09; and 0 = CRH00).

Nonsignificant dash number from table I.

Single letter designating FR level (M, P, R, and S).

Packaging: Capacitors may be furnished in tape and reel packaging when so specified in the ordering data.

APPLICATION NOTE: Styles CRH01 through CRH05 capacitors should be used where stringent conditions must be met.

* MIL-PRF-83421/6 alternative capacitors: Polyphenylene sulfide (PPS) alternatives to the MIL-PRF-83421/1 polycarbonate (PC) capacitors are offered in MIL-PRF-83421/6. Although the sizes are identical, insulation resistance, dissipation factor and capacitance change with temperature are different. MIL-PRF-83421/6 capacitors are good choices for many applications. Before using MIL-PRF-83421/6 capacitors as replacements for MIL-PRF-83421/1 capacitors, they need to be evaluated for the application to assure that they meet the requirements.

* Cross references between /1 and /6 dash numbers are listed in table VII. The table only lists the dash numbers that differ between the 2 specification sheets. The following dash numbers are the same for /1 and /6: 1001 - 1186, 1313 - 1354, 2001 - 2312, 3001 - 3270, 3313 - 3354, 4001 - 4318, and 5001 - 5108. For /1 dash numbers 6000 - 0000 (inactive), use recommendations for 1000 - 5000 (active). Active capacitors not listed in the table have identical dash numbers for MIL-PRF-83421/1 and /6. For inactive MIL-PRF-83421/1 capacitors (CRH06 through CRH00), determine corresponding active style (CRH01 through CRH05) then look up active style in table for MIL-PRF-83421/6 alternative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

* TABLE VII. MIL-PRF-83421/1 PIN to MIL-PRF-83421/6 PIN cross reference.

30 Volt Parts		30 Volt Parts		30 Volt Parts		30 Volt Parts		50 Volt Parts	
83421/1 CRH01	83421/6 CRH31	83421/1 CRH01	83421/6 CRH31	83421/1 CRH01	83421/6 CRH31	83421/1 CRH01	83421/6 CRH31	83421/1 CRH02	83421/6 CRH32
1373	1187	1229	1235	1223	1229	1379	1355	2319	2313
1374	1188	1230	1236	1224	1230	1380	1356	2320	2314
1375	1189	1231	1237	1225	1231	1381	1357	2321	2315
1376	1190	1232	1238	1226	1232	1382	1358	2322	2316
1377	1191	1233	1239	1227	1233	1383	1359	2323	2317
1378	1192	1234	1240	1228	1234	1384	1360	2324	2318
1187	1193	1235	1241	1271	1277	1355	1361	2325	2319
1188	1194	1236	1242	1272	1278	1356	1362	2326	2320
1189	1195	1237	1243	1273	1279	1357	1363	2327	2321
1190	1196	1238	1244	1274	1280	1358	1364	2328	2322
1191	1197	1239	1245	1275	1281	1359	1365	2329	2323
1192	1198	1240	1246	1276	1282	1360	1366	2330	2324
1193	1199	1241	1247	1277	1283	1361	1367	2331	2325
1194	1200	1242	1248	1278	1284	1362	1368	2332	2326
1195	1201	1243	1249	1279	1285	1363	1369	2333	2327
1196	1202	1244	1250	1280	1286	1364	1370	2334	2328
1197	1203	1245	1251	1281	1287	1365	1371	2335	2329
1198	1204	1246	1252	1282	1288	1366	1372	2336	2330
1199	1205	1247	1253	1385	1289	1367	1373	2337	2331
1200	1206	1248	1254	1386	1290	1368	1374	2338	2332
1201	1207	1249	1255	1387	1291	1369	1375	2339	2333
1202	1208	1250	1256	1388	1292	1370	1376	2340	2334
1203	1209	1251	1257	1389	1293	1371	1377	2341	2335
1204	1210	1252	1258	1390	1294	1372	1378	2342	2336
1205	1211	1253	1259	1289	1295			2343	2337
1206	1212	1254	1260	1290	1296			2344	2338
1207	1213	1255	1261	1291	1297			2345	2339
1208	1214	1256	1262	1292	1298			2346	2340
1209	1215	1257	1263	1293	1299			2347	2341
1210	1216	1258	1264	1294	1300			2348	2342
1211	1217	1259	1265	1295	1301			2349	2343
1212	1218	1260	1266	1296	1302			2350	2344
1213	1219	1261	1267	1297	1303			2351	2345
1214	1220	1262	1268	1298	1304			2352	2346
1215	1221	1263	1269	1299	1305			2353	2347
1216	1222	1264	1270	1300	1306			2354	2348
1217	1223	1265	1271	1301	1307			2355	2349
1218	1224	1266	1272	1302	1308			2356	2350
1219	1225	1267	1273	1303	1309			2357	2351
1220	1226	1268	1274	1304	1310			2358	2352
1221	1227	1269	1275	1305	1311			2359	2353
1222	1228	1270	1276	1306	1312			2360	2354

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

* TABLE VII. MIL-PRF-83421/1 PIN to MIL-PRF-83421/6 PIN cross reference - Continued.

100 Volt Parts		400 Volt Parts		400 Volt Parts		400 Volt Parts		400 Volt Parts	
83421/1 CRH03	83421/6 CRH33	83421/1 CRH05	83421/6 CRH35	83421/1 CRH05	83421/6 CRH35	83421/1 CRH05	83421/6 CRH35	83421/1 CRH05	83421/6 CRH35
3271	3277	5271	5109	5151	5157	5193	5205	5241	5253
3272	3278	5272	5110	5152	5158	5194	5206	5242	5254
3273	3279	5273	5111	5153	5159	5195	5207	5243	5255
3274	3280	5274	5112	5154	5160	5196	5208	5244	5256
3275	3281	5275	5113	5155	5161	5197	5209	5245	5257
3276	3282	5276	5114	5156	5162	5198	5210	5246	5258
3277	3283	5109	5115	5157	5163	5199	5211	5247	5259
3278	3284	5110	5116	5158	5164	5200	5212	5248	5260
3279	3285	5111	5117	5159	5165	5201	5213	5249	5261
3280	3286	5112	5118	5160	5166	5202	5214	5250	5262
3281	3287	5113	5119	5161	5167	5203	5215	5251	5263
3282	3288	5114	5120	5162	5168	5204	5216	5252	5264
3283	3289	5115	5121	5163	5169	5205	5217	5253	5265
3284	3290	5116	5122	5164	5170	5206	5218	5254	5266
3285	3291	5117	5123	5165	5171	5207	5219	5255	5267
3286	3292	5118	5124	5166	5172	5208	5220	5256	5268
3287	3293	5119	5125	5167	5173	5209	5221	5257	5269
3288	3294	5120	5126	5168	5174	5210	5222	5258	5270
3289	3295	5121	5127	5169	5175	5211	5223	5259	5271
3290	3296	5122	5128	5170	5176	5212	5224	5260	5272
3291	3297	5123	5129	5171	5177	5213	5225	5261	5273
3292	3298	5124	5130	5172	5178	5214	5226	5262	5274
3293	3299	5125	5131	5173	5179	5215	5227	5263	5275
3294	3300	5126	5132	5174	5180	5216	5228	5264	5276
3295	3301	5127	5133	5175	5181	5217	5229	5265	5277
3296	3302	5128	5134	5176	5182	5218	5230	5266	5278
3297	3303	5129	5135	5177	5183	5219	5231	5267	5279
3298	3304	5130	5136	5178	5184	5220	5232	5268	5280
3299	3305	5131	5137	5179	5185	5221	5233	5269	5281
3300	3306	5132	5138	5180	5186	5222	5234	5270	5282
3301	3307	5133	5139	5277	5187	5223	5235		
3302	3308	5134	5140	5278	5188	5224	5236		
3303	3309	5135	5141	5279	5189	5225	5237		
3304	3310	5136	5142	5280	5190	5226	5238		
3305	3311	5137	5143	5281	5191	5227	5239		
3306	3312	5138	5144	5282	5192	5228	5240		
		5139	5145	5181	5193	5229	5241		
		5140	5146	5182	5194	5230	5242		
		5141	5147	5183	5195	5231	5243		
		5142	5148	5184	5196	5232	5244		
		5143	5149	5185	5197	5233	5245		
		5144	5150	5186	5198	5234	5246		
		5145	5151	5187	5199	5235	5247		
		5146	5152	5188	5200	5236	5248		
		5147	5153	5189	5201	5237	5249		
		5148	5154	5190	5202	5238	5250		
		5149	5155	5191	5203	5239	5251		
		5150	5156	5192	5204	5240	5252		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.

Changes from previous issue: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* Referenced documents: In addition to MIL-PRF-83421, this document also references MIL-STD-202, MIL-STD-1276, and MIL-PRF-83421/6.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC
NASA - NA

Preparing activity:
DLA - CC

(Project 5910-2005-015)

Review activities:
Army - AR
Navy - AS, MC, OS, SH
Air Force - 19, 99

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:05Z
Check the source to verify that this is the current version before use.