INCH-POUND


MIL-PRF-83421/6A
1 March 1999
SUPERSEDING
MIL-PRF-83421/6
21 December 1998

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, METALLIZED PLASTIC FILM DIELECTRIC, DC AND AC, HERMETICALLY SEALED IN METAL CASES, ESTABLISHED RELIABILITY STYLES CRH31, CRH32, CRH33, CRH34, and CRH35

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this and specification MIL-PRF-83421.

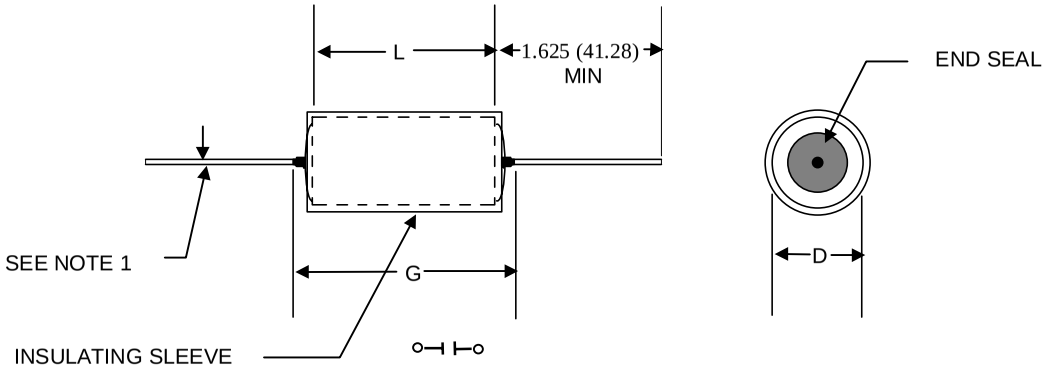

CIRCUIT DIAGRAM

NOTES:
1. Number 22 AWG wire for case diameter of .235 (5.97 mm). Number 20 AWG wire for case diameter of .400 (10.16 mm). Number 18 AWG wire for case diameters of .562 (14.27 mm) and over.
2. See table I for additional dimensions.
3. Dimensions are in inches.
4. Metric equivalents are given for general information only and are in parentheses.
5. Insulating sleeve shall extend beyond the capacitor body. Insulating sleeve thickness shall not exceed .005 (0.13 mm). Plastic insulating sleeve shall be transparent; marking shall be applied to the capacitor case.
6. Lead length may be a minimum of one inch (25.4 mm) long for use in tape and reel packaging, when specified in the ordering data.

FIGURE 1. Capacitor configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

* TABLE I. Electrical characteristics, dimensions and dash numbers.

CRH31 - 30 VOLTS (DC RATING)												
Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			DASH NUMBERS 2/						AC Ratings (for sinusoidal operation from -65° to 85°C) 3/	
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						Voltage RMS 0 to 400Hz	Current ARMS 0 to 400Hz
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0		
0.001	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1001-	1002-	1003-	1004-	1005-	1006-	22	.001
0.0012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1007-	1008-	1009-	1010-	1011-	1012-	22	.001
0.0015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1013-	1014-	1015-	1016-	1017-	1018-	22	.001
0.0018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1019-	1020-	1021-	1022-	1023-	1024-	22	.001
0.002	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1025-	1026-	1027-	1028-	1029-	1030-	22	.001
0.0022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1031-	1032-	1033-	1034-	1035-	1036-	22	.001
0.0027	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1037-	1038-	1039-	1040-	1041-	1042-	22	.001
0.0033	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1043-	1044-	1045-	1046-	1047-	1048-	22	.001
0.0039	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1049-	1050-	1051-	1052-	1053-	1054-	22	.001
0.0047	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1055-	1056-	1057-	1058-	1059-	1060-	22	.001
0.005	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1061-	1062-	1063-	1064-	1065-	1066-	22	.001
0.0056	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1067-	1068-	1069-	1070-	1071-	1072-	22	.001
0.0068	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1073-	1074-	1075-	1076-	1077-	1078-	22	.001
0.0082	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1079-	1080-	1081-	1082-	1083-	1084-	22	.001
0.01	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1085-	1086-	1087-	1088-	1089-	1090-	22	.001
0.012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1091-	1092-	1093-	1094-	1095-	1096-	22	.001
0.015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1097-	1098-	1099-	1100-	1101-	1102-	22	.001
0.018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1103-	1104-	1105-	1106-	1107-	1108-	22	.001
0.02	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1109-	1110-	1111-	1112-	1113-	1114-	22	.001
0.022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1115-	1116-	1117-	1118-	1119-	1120-	22	.001
0.027	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1121-	1122-	1123-	1124-	1125-	1126-	22	.002
0.033	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1127-	1128-	1129-	1130-	1131-	1132-	22	.002
0.039	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1133-	1134-	1135-	1136-	1137-	1138-	22	.002
0.047	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1139-	1140-	1141-	1142-	1143-	1144-	22	.003
0.05	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1145-	1146-	1147-	1148-	1149-	1150-	22	.003
0.056	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1151-	1152-	1153-	1154-	1155-	1156-	22	.003
0.068	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	1157-	1158-	1159-	1160-	1161-	1162-	22	.004
0.082	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	1163-	1164-	1165-	1166-	1167-	1168-	22	.005
0.1	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	1169-	1170-	1171-	1172-	1173-	1174-	22	.006
0.12	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	1175-	1176-	1177-	1178-	1179-	1180-	22	.007
0.15	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	1181-	1182-	1183-	1184-	1185-	1186-	22	.008
0.18	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1187-	1188-	1189-	1190-	1191-	1192-	22	.010
0.20	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1193-	1194-	1195-	1196-	1197-	1198-	22	.011
0.22	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1199-	1200-	1201-	1202-	1203-	1204-	22	.012
0.27	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1205-	1206-	1207-	1208-	1209-	1210-	22	.015
0.33	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1211-	1212-	1213-	1214-	1215-	1216-	22	.018

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses) L ±.030 (.76)	D +.020 (.51) -.000	G, max	DASH NUMBERS 2/ Capacitance tolerance value (in %) ±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	AC Ratings (for sinusoidal operation from -65° to 85°C) 3/ Voltage RMS 0 to 400Hz	Current ARMS 0 to 400Hz
CRH31 - 30 VOLTS (DC RATING)											
0.39	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1217-	1218-	1219-	1220-	1221-	1222-	22	.021
0.47	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	1223-	1224-	1225-	1226-	1227-	1228-	22	.026
0.50	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	1229-	1230-	1231-	1232-	1233-	1234-	22	.028
0.56	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	1235-	1236-	1237-	1238-	1239-	1240-	22	.031
0.68	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	1241-	1242-	1243-	1244-	1245-	1246-	22	.037
0.82	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	1247-	1248-	1249-	1250-	1251-	1252-	22	.045
1.0	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	1253-	1254-	1255-	1256-	1257-	1258-	22	.055
1.2	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	1259-	1260-	1261-	1262-	1263-	1264-	22	.066
1.5	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	1265-	1266-	1267-	1268-	1269-	1270-	22	.082
1.8	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	1271-	1272-	1273-	1274-	1275-	1276-	22	.099
2.0	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	1277-	1278-	1279-	1280-	1281-	1282-	22	.110
2.2	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	1283-	1284-	1285-	1286-	1287-	1288-	22	.120
2.7	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	1289-	1290-	1291-	1292-	1293-	1294-	22	.15
3.0	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	1295-	1296-	1297-	1298-	1299-	1300-	22	.17
3.3	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	1301-	1302-	1303-	1304-	1305-	1306-	22	.18
3.9	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	1307-	1308-	1309-	1310-	1311-	1312-	22	.21
4.7	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	1313-	1314-	1315-	1316-	1317-	1318-	22	.26
5.0	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	1319-	1320-	1321-	1322-	1323-	1324-	22	.28
5.6	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	1325-	1326-	1327-	1328-	1329-	1330-	22	.31
6.8	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	1331-	1332-	1333-	1334-	1335-	1336-	22	.37
8.0	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	1337-	1338-	1339-	1340-	1341-	1342-	22	.44
8.2	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	1343-	1344-	1345-	1346-	1347-	1348-	22	.45
10.0	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	1349-	1350-	1351-	1352-	1353-	1354-	22	.55
12.0	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	1355-	1356-	1357-	1358-	1359-	1360-	22	.66
15.0	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	1361-	1362-	1363-	1364-	1365-	1366-	22	.83
20.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	1367-	1368-	1369-	1370-	1371-	1372-	22	1.10
22.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	1373-	1374-	1375-	1376-	1377-	1378-	22	1.21
CRH32 - 50 VOLTS (DC RATING)											
0.001	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2001-	2002-	2003-	2004-	2005-	2006-	36	.001
0.0012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2007-	2008-	2009-	2010-	2011-	2012-	36	.001
0.0015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2013-	2014-	2015-	2016-	2017-	2018-	36	.001
0.0018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2019-	2020-	2021-	2022-	2023-	2024-	36	.001
0.002	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2025-	2026-	2027-	2028-	2029-	2030-	36	.001
0.0022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2031-	2032-	2033-	2034-	2035-	2036-	36	.001

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

CRH32 - 50 VOLTS (DC RATING)												
Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			DASH NUMBERS 2/						AC Ratings (for sinusoidal operation from -65° to 85°C) 3/	
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						Voltage RMS 0 to 400Hz	Current ARMS 0 to 400Hz
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0		
0.0027	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2037-	2038-	2039-	2040-	2041-	2042-	36	.001
0.0033	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2043-	2044-	2045-	2046-	2047-	2048-	36	.001
0.0039	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2049-	2050-	2051-	2052-	2053-	2054-	36	.001
0.0047	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2055-	2056-	2057-	2058-	2059-	2060-	36	.001
0.005	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2061-	2062-	2063-	2064-	2065-	2066-	36	.001
0.0056	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2067-	2068-	2069-	2070-	2071-	2072-	36	.001
0.0068	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2073-	2074-	2075-	2076-	2077-	2078-	36	.001
0.0082	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	2079-	2080-	2081-	2082-	2083-	2084-	36	.001
0.01	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	2085-	2086-	2087-	2088-	2089-	2090-	36	.001
0.012	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	2091-	2092-	2093-	2094-	2095-	2096-	36	.001
0.015	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	2097-	2098-	2099-	2100-	2101-	2102-	36	.001
0.018	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	2103-	2104-	2105-	2106-	2107-	2108-	36	.002
0.02	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	2109-	2110-	2111-	2112-	2113-	2114-	36	.002
0.022	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	2115-	2116-	2117-	2118-	2119-	2120-	36	.002
0.027	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	2121-	2122-	2123-	2124-	2125-	2126-	36	.002
0.033	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	2127-	2128-	2129-	2130-	2131-	2132-	36	.003
0.039	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	2133-	2134-	2135-	2136-	2137-	2138-	36	.004
0.047	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	2139-	2140-	2141-	2142-	2143-	2144-	36	.004
0.05	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	2145-	2146-	2147-	2148-	2149-	2150-	36	.005
0.056	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	2151-	2152-	2153-	2154-	2155-	2156-	36	.005
0.068	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	2157-	2158-	2159-	2160-	2161-	2162-	36	.006
0.082	0.813 (20.65)	0.193 (4.90)	1.013 (25.73)	2163-	2164-	2165-	2166-	2167-	2168-	36	.007
0.1	0.813 (20.65)	0.193 (4.90)	1.013 (25.73)	2169-	2170-	2171-	2172-	2173-	2174-	36	.009
0.12	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	2175-	2176-	2177-	2178-	2179-	2180-	36	.011
0.15	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	2181-	2182-	2183-	2184-	2185-	2186-	36	.013
0.18	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	2187-	2188-	2189-	2190-	2191-	2192-	36	.016
0.20	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	2193-	2194-	2195-	2196-	2197-	2198-	36	.018
0.22	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	2199-	2200-	2201-	2202-	2203-	2204-	36	.020
0.27	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	2205-	2206-	2207-	2208-	2209-	2210-	36	.024
0.33	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	2211-	2212-	2213-	2214-	2215-	2216-	36	.030
0.39	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	2217-	2218-	2219-	2220-	2221-	2222-	36	.035
0.47	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	2223-	2224-	2225-	2226-	2227-	2228-	36	.042
0.50	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	2229-	2230-	2231-	2232-	2233-	2234-	36	.045
0.56	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	2235-	2236-	2237-	2238-	2239-	2240-	36	.050
0.68	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	2241-	2242-	2243-	2244-	2245-	2246-	36	.061
0.82	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	2247-	2248-	2249-	2250-	2251-	2252-	36	.074

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses) L ±.030 (.76)	D +.020 (.51) -.000	G, max	DASH NUMBERS 2/ Capacitance tolerance value (in %) ±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	AC Ratings (for sinusoidal operation from -65° to 85°C) 3/ Voltage RMS 0 to 400Hz	Current ARMS 0 to 400Hz
CRH32 - 50 VOLTS (DC RATING)											
1.0	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	2253-	2254-	2255-	2256-	2257-	2258-	36	.090
1.2	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	2259-	2260-	2261-	2262-	2263-	2264-	36	.11
1.5	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	2265-	2266-	2267-	2268-	2269-	2270-	36	.14
1.8	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	2271-	2272-	2273-	2274-	2275-	2276-	36	.16
2.0	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	2277-	2278-	2279-	2280-	2281-	2282-	36	.18
2.2	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	2283-	2284-	2285-	2286-	2287-	2288-	36	.20
2.7	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	2289-	2290-	2291-	2292-	2293-	2294-	36	.24
3.0	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	2295-	2296-	2297-	2298-	2299-	2300-	36	.27
3.3	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	2301-	2302-	2303-	2304-	2305-	2306-	36	.30
3.9	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	2307-	2308-	2309-	2310-	2311-	2312-	36	.35
4.7	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	2313-	2314-	2315-	2316-	2317-	2318-	36	.42
5.0	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	2319-	2320-	2321-	2322-	2323-	2324-	36	.45
5.6	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	2325-	2326-	2327-	2328-	2329-	2330-	36	.50
6.8	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	2331-	2332-	2333-	2334-	2335-	2336-	36	.61
8.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	2337-	2338-	2339-	2340-	2341-	2342-	36	.72
8.2	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	2343-	2344-	2345-	2346-	2347-	2348-	36	.74
10.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	2349-	2350-	2351-	2352-	2353-	2354-	36	.90
CRH33 - 100 VOLTS (DC RATING)											
0.001	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3001-	3002-	3003-	3004-	3005-	3006-	63	.001
0.0012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3007-	3008-	3009-	3010-	3011-	3012-	63	.001
0.0015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3013-	3014-	3015-	3016-	3017-	3018-	63	.001
0.0018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3019-	3020-	3021-	3022-	3023-	3024	63	.001
0.002	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3025-	3026-	3027-	3028-	3029-	3030-	63	.001
0.0022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3031-	3032-	3033-	3034-	3035-	3036-	63	.001
0.0027	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3037-	3038-	3039-	3040-	3041-	3042-	63	.001
0.0033	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3043-	3044-	3045-	3046-	3047-	3048-	63	.001
0.0039	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3049-	3050-	3051-	3052-	3053-	3054-	63	.001
0.0047	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3055-	3056-	3057-	3058-	3059-	3060-	63	.001
0.005	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3061-	3062-	3063-	3064-	3065-	3066-	63	.001
0.0056	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3067-	3068-	3069-	3070-	3071-	3072-	63	.001
0.0068	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	3073-	3074-	3075-	3076-	3077-	3078-	63	.001
0.0082	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	3079-	3080-	3081-	3082-	3083-	3084-	63	.001
0.01	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	3085-	3086-	3087-	3088-	3089-	3090-	63	.002
0.012	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	3091-	3092-	3093-	3094-	3095-	3096-	63	.002

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

CRH33 - 100 VOLTS (DC RATING)												
Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			DASH NUMBERS 2/						AC Ratings (for sinusoidal operation from -65° to 85°C) 3/	
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						Voltage RMS 0 to 400Hz	Current ARMS 0 to 400Hz
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0		
0.015	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	3097-	3098-	3099-	3100-	3101-	3102-	63	.002
0.018	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	3103-	3104-	3105-	3106-	3107-	3108-	63	.003
0.02	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	3109-	3110-	3111-	3112-	3113-	3114-	63	.003
0.022	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	3115-	3116-	3117-	3118-	3119-	3120-	63	.003
0.027	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	3121-	3122-	3123-	3124-	3125-	3126-	63	.004
0.033	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	3127-	3128-	3129-	3130-	3131-	3132-	63	.005
0.039	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	3133-	3134-	3135-	3136-	3137-	3138-	63	.006
0.047	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	3139-	3140-	3141-	3142-	3143-	3144-	63	.007
0.05	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	3145-	3146-	3147-	3148-	3149-	3150-	63	.008
0.056	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	3151-	3152-	3153-	3154-	3155-	3156-	63	.008
0.068	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	3157-	3158-	3159-	3160-	3161-	3162-	63	.010
0.082	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	3163-	3164-	3165-	3166-	3167-	3168-	63	.012
0.1	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	3169-	3170-	3171-	3172-	3173-	3174-	63	.015
0.12	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	3175-	3176-	3177-	3178-	3179-	3180-	63	.018
0.15	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	3181-	3182-	3183-	3184-	3185-	3186-	63	.022
0.18	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	3187-	3188-	3189-	3190-	3191-	3192-	63	.027
0.20	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	3193-	3194-	3195-	3196-	3197-	3198-	63	.030
0.22	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	3199-	3200-	3201-	3202-	3203-	3204-	63	.033
0.27	1.063 (27.00)	0.312 (7.92)	1.263 (32.08)	3205-	3206-	3207-	3208-	3209-	3210-	63	.041
0.33	1.063 (27.00)	0.312 (7.92)	1.263 (32.08)	3211-	3212-	3213-	3214-	3215-	3216-	63	.050
0.39	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	3217-	3218-	3219-	3220-	3221-	3222-	63	.058
0.47	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	3223-	3224-	3225-	3226-	3227-	3228-	63	.071
0.50	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	3229-	3230-	3231-	3232-	3233-	3234-	63	.075
0.56	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	3235-	3236-	3237-	3238-	3239-	3240-	63	.084
0.68	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	3241-	3242-	3243-	3244-	3245-	3246-	63	.10
0.82	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	3247-	3248-	3249-	3250-	3251-	3252-	63	.12
1.0	1.125 (28.58)	0.562 (14.27)	1.325 (33.66)	3253-	3254-	3255-	3256-	3257-	3258-	63	.15
1.2	1.125 (28.58)	0.562 (14.27)	1.325 (33.66)	3259-	3260-	3261-	3262-	3263-	3264-	63	.18
1.5	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	3265-	3266-	3267-	3268-	3269-	3270-	63	.23
1.8	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	3271-	3272-	3273-	3274-	3275-	3276-	63	.27
2.0	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	3277-	3278-	3279-	3280-	3281-	3282-	63	.30
2.2	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	3283-	3284-	3285-	3286-	3287-	3288-	63	.33
2.7	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	3289-	3290-	3291-	3292-	3293-	3294-	63	.41
3.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	3295-	3296-	3297-	3298-	3299-	3300-	63	.45
3.3	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	3301-	3302-	3303-	3304-	3305-	3306-	63	.50
3.9	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	3307-	3308-	3309-	3310-	3311-	3312-	63	.59

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses) L ±.030 (.76)	D +.020 (.51) -.000	G, max	DASH NUMBERS 2/ Capacitance tolerance value (in %) ±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	AC Ratings (for sinusoidal operation from -65° to 85°C) 3/ Voltage RMS 0 to 400Hz	Current ARMS 0 to 400Hz
CRH33 - 100 VOLTS (DC RATING)											
4.7	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	3313-	3314-	3315-	3316-	3317-	3318-	63	.71
5.0	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	3319-	3320-	3321-	3322-	3323-	3324-	63	.75
5.6	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	3325-	3326-	3327-	3328-	3329-	3330-	63	.84
6.8	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	3331-	3332-	3333-	3334-	3335-	3336-	63	1.02
8.0	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	3337-	3338-	3339-	3340-	3341-	3342-	63	1.20
8.2	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	3343-	3344-	3345-	3346-	3347-	3348-	63	1.23
CRH34 - 200 VOLTS (DC RATING)											
0.001	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4001-	4002-	4003-	4004-	4005-	4006-	120	.001
0.0012	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4007-	4008-	4009-	4010-	4011-	4012-	120	.001
0.0015	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4013-	4014-	4015-	4016-	4017-	4018-	120	.001
0.0018	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4019-	4020-	4021-	4022-	4023-	4024-	120	.001
0.002	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4025-	4026-	4027-	4028-	4029-	4030-	120	.001
0.0022	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4031-	4032-	4033-	4034-	4035-	4036-	120	.001
0.0027	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4037-	4038-	4039-	4040-	4041-	4042-	120	.001
0.0033	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4043-	4044-	4045-	4046-	4047-	4048-	120	.001
0.0039	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4049-	4050-	4051-	4052-	4053-	4054-	120	.001
0.0047	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4055-	4056-	4057-	4058-	4059-	4060-	120	.001
0.005	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4061-	4062-	4063-	4064-	4065-	4066-	120	.002
0.0056	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4067-	4068-	4069-	4070-	4071-	4072-	120	.002
0.0068	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4073-	4074-	4075-	4076-	4077-	4078-	120	.002
0.0082	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	4079-	4080-	4081-	4082-	4083-	4084-	120	.002
0.01	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	4085-	4086-	4087-	4088-	4089-	4090-	120	.003
0.012	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	4091-	4092-	4093-	4094-	4095-	4096-	120	.004
0.015	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	4097-	4098-	4099-	4100-	4101-	4102-	120	.004
0.018	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	4103-	4104-	4105-	4106-	4107-	4108-	120	.005
0.02	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	4109-	4110-	4111-	4112-	4113-	4114-	120	.006
0.022	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	4115-	4116-	4117-	4118-	4119-	4120-	120	.007
0.027	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	4121-	4122-	4123-	4124-	4125-	4126-	120	.008
0.033	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	4127-	4128-	4129-	4130-	4131-	4132-	120	.010
0.039	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	4133-	4134-	4135-	4136-	4137-	4138-	120	.012
0.047	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	4139-	4140-	4141-	4142-	4143-	4144-	120	.014
0.05	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	4145-	4146-	4147-	4148-	4149-	4150-	120	.015
0.056	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	4151-	4152-	4153-	4154-	4155-	4156-	120	.017
0.068	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	4157-	4158-	4159-	4160-	4161-	4162-	120	.020

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses) L ±.030 (.76)	D +.020 (.51) -.000	G, max	DASH NUMBERS 2/ Capacitance tolerance value (in %) ±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	AC Ratings (for sinusoidal operation from -65° to 85°C) 3/ Voltage RMS 0 to 400Hz	Current ARMS 0 to 400Hz
CRH34 - 200 VOLTS (DC RATING)											
0.082	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	4163-	4164-	4165-	4166-	4167-	4168-	120	.025
0.1	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	4169-	4170-	4171-	4172-	4173-	4174-	120	.030
0.12	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	4175-	4176-	4177-	4178-	4179-	4180-	120	.036
0.15	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	4181-	4182-	4183-	4184-	4185-	4186-	120	.045
0.18	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	4187-	4188-	4189-	4190-	4191-	4192-	120	.054
0.20	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	4193-	4194-	4195-	4196-	4197-	4198-	120	.060
0.22	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	4199-	4200-	4201-	4202-	4203-	4204-	120	.066
0.27	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4205-	4206-	4207-	4208-	4209-	4210-	120	.081
0.33	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4211-	4212-	4213-	4214-	4215-	4216-	120	.099
0.39	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4217-	4218-	4219-	4220-	4221-	4222-	120	.12
0.47	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4223-	4224-	4225-	4226-	4227-	4228-	120	.14
0.50	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4229-	4230-	4231-	4232-	4233-	4234-	120	.15
0.56	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4235-	4236-	4237-	4238-	4239-	4240-	120	.17
0.68	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	4241-	4242-	4243-	4244-	4245-	4246-	120	.20
0.82	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	4247-	4248-	4249-	4250-	4251-	4252-	120	.25
1.0	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	4253-	4254-	4255-	4256-	4257-	4258-	120	.30
1.2	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	4259-	4260-	4261-	4262-	4263-	4264-	120	.36
1.5	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	4265-	4266-	4267-	4268-	4269-	4270-	120	.45
1.8	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	4271-	4272-	4273-	4274-	4275-	4276-	120	.54
2.0	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	4277-	4278-	4279-	4280-	4281-	4282-	120	.60
2.2	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	4283-	4284-	4285-	4286-	4287-	4288-	120	.66
2.5	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	4289-	4290-	4291-	4292-	4293-	4294-	120	.75
2.7	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	4295-	4296-	4297-	4298-	4299-	4300-	120	.81
3.0	1.875 (47.63)	1.000 (25.40)	2.075 (52.71)	4301-	4302-	4303-	4304-	4305-	4306-	120	.90
3.3	1.875 (47.63)	1.000 (25.40)	2.075 (52.71)	4307-	4308-	4309-	4310-	4311-	4312-	120	.99
3.9	2.375 (60.33)	1.000 (25.40)	2.575 (65.41)	4313-	4314-	4315-	4316-	4317-	4318-	120	1.20
CRH35 - 400 VOLTS (DC RATING)											
0.001	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5001-	5002-	5003-	5004-	5005-	5006-	240	.001
0.0012	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5007-	5008-	5009-	5010-	5011-	5012-	240	.001
0.0015	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5013-	5014-	5015-	5016-	5017-	5018-	240	.001
0.0018	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5019-	5020-	5021-	5022-	5023-	5024-	240	.001
0.002	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5025-	5026-	5027-	5028-	5029-	5030-	240	.001
0.0022	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5031-	5032-	5033-	5034-	5035-	5036-	240	.001
0.0027	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5037-	5038-	5039-	5040-	5041-	5042-	240	.002

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

CRH35 - 400 VOLTS (DC RATING)												
Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			DASH NUMBERS 2/						AC Ratings (for sinusoidal operation from -65° to 85°C) 3/	
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						Voltage RMS 0 to 400Hz	Current ARMS 0 to 400Hz
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0		
0.0033	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5043-	5044-	5045-	5046-	5047-	5048-	240	.002
0.0039	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5049-	5050-	5051-	5052-	5053-	5054-	240	.002
0.0047	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5055-	5056-	5057-	5058-	5059-	5060-	240	.003
0.005	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5061-	5062-	5063-	5064-	5065-	5066-	240	.003
0.0056	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5067-	5068-	5069-	5070-	5071-	5072-	240	.003
0.0068	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	5073-	5074-	5075-	5076-	5077-	5078-	240	.004
0.0082	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	5079-	5080-	5081-	5082-	5083-	5084-	240	.005
0.01	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	5085-	5086-	5087-	5088-	5089-	5090-	240	.006
0.012	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	5091-	5092-	5093-	5094-	5095-	5096-	240	.007
0.015	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	5097-	5098-	5099-	5100-	5101-	5102-	240	.009
0.018	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5103-	5104-	5105-	5106-	5107-	5108-	240	.011
0.02	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5109-	5110-	5111-	5112-	5113-	5114-	240	.012
0.022	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5115-	5116-	5117-	5118-	5119-	5120-	240	.013
0.027	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5121-	5122-	5123-	5124-	5125-	5126-	240	.016
0.033	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5127-	5128-	5129-	5130-	5131-	5132-	240	.020
0.039	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5133-	5134-	5135-	5136-	5137-	5138-	240	.023
0.047	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	5139-	5140-	5141-	5142-	5143-	5144-	240	.028
0.05	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	5145-	5146-	5147-	5148-	5149-	5150-	240	.030
0.056	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	5151-	5152-	5153-	5154-	5155-	5156-	240	.034
0.068	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	5157-	5158-	5159-	5160-	5161-	5162-	240	.041
0.082	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	5163-	5164-	5165-	5166-	5167-	5168-	240	.049
0.1	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	5169-	5170-	5171-	5172-	5173-	5174-	240	.060
0.12	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	5175-	5176-	5177-	5178-	5179-	5180-	240	.072
0.15	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	5181-	5182-	5183-	5184-	5185-	5186-	240	.090
0.18	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	5187-	5188-	5189-	5190-	5191-	5192-	240	.11
0.20	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	5193-	5194-	5195-	5196-	5197-	5198-	240	.12
0.22	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	5199-	5200-	5201-	5202-	5203-	5204-	240	.13
0.27	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	5205-	5206-	5207-	5208-	5209-	5210-	240	.16
0.33	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	5211-	5212-	5213-	5214-	5215-	5216-	240	.20
0.39	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	5217-	5218-	5219-	5220-	5221-	5222-	240	.23
0.47	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	5223-	5224-	5225-	5226-	5227-	5228-	240	.28
0.50	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	5229-	5230-	5231-	5232-	5233-	5234-	240	.30
0.56	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	5235-	5236-	5237-	5238-	5239-	5240-	240	.34
0.68	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	5241-	5242-	5243-	5244-	5245-	5246-	240	.41
0.82	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	5247-	5248-	5249-	5250-	5251-	5252-	240	.49
1.0	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	5253-	5254-	5255-	5256-	5257-	5258-	240	.60

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

CRH35 - 400 VOLTS (DC RATING)												
Capacitance value (nom) (in μf)	Dimensions 1/ (in inches with mm in parentheses)			DASH NUMBERS 2/						AC Ratings (for sinusoidal operation from -65° to 85°C) 3/	
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						Voltage RMS 0 to 400Hz	Current ARMS 0 to 400Hz
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0		
1.2	1.875 (47.63)	1.000 (25.4)	2.075 (52.71)	5259-	5260-	5261-	5262-	5263-	5264-	240	.72
1.5	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	5265-	5266-	5267-	5268-	5269-	5270-	240	.90
1.8	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	5271-	5272-	5273-	5274-	5275-	5276-	240	1.08
2.0	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	5277-	5278-	5279-	5280-	5281-	5282-	240	1.20

1/ L and D dimensions are bare case dimensions.
2/ The complete dash number will include the applicable letter completing the style designator (CRH31 = 1, CRH32 = 2, etc.,) as a prefix and the applicable FR level symbol (M = M, P = P, etc.,) as a suffix.
3/ For +100°C operation, linearly derate +85°C rating by 50 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

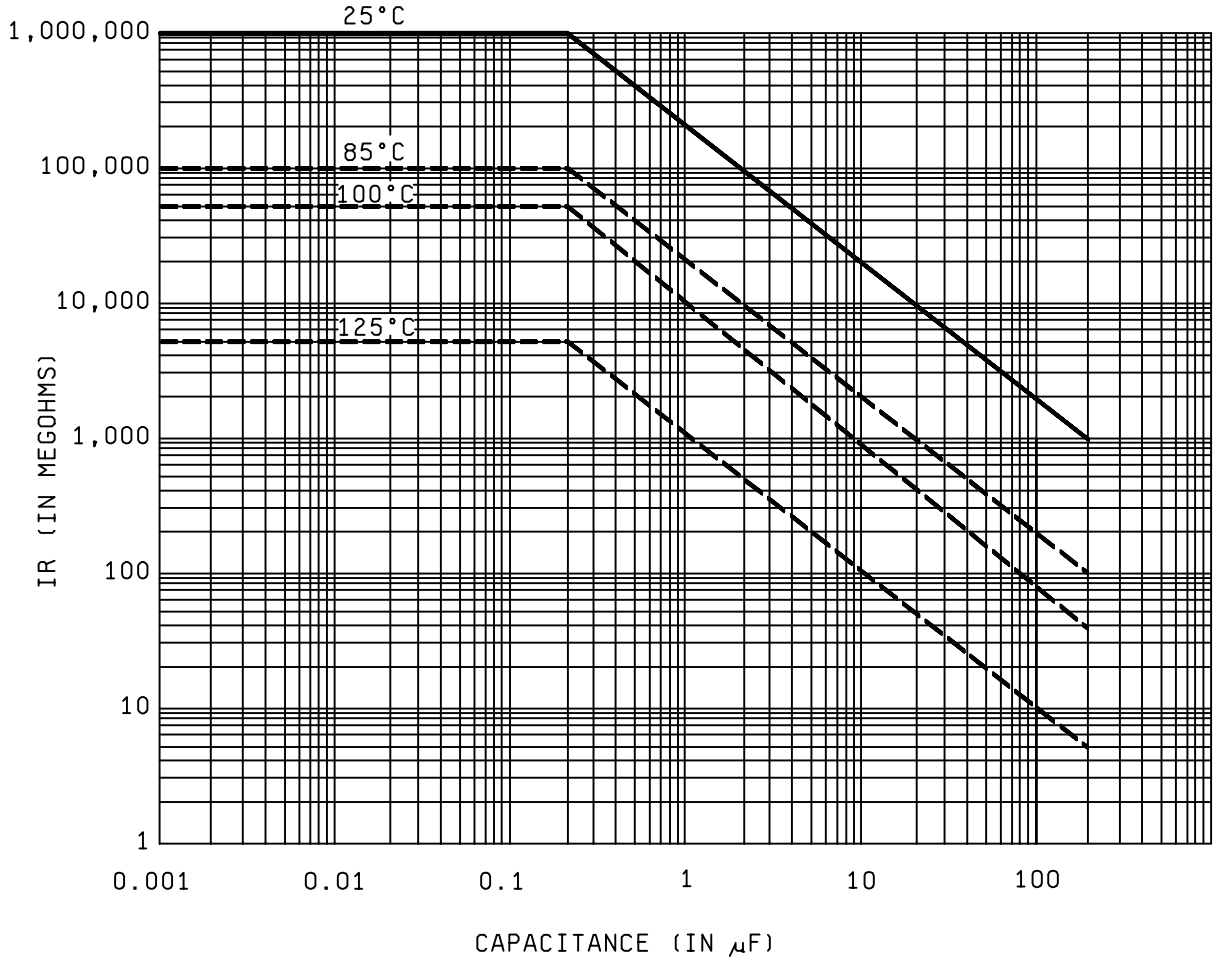


FIGURE 2. Insulation resistance versus capacitance value.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Dielectric: Polyphenylene sulfide, metallized.

Case material: Nonmagnetic.

Leads:

Leads of .500 inch (12.70 mm) and smaller case diameters: Solder-coated copper clad steel, type N21 of MIL-STD-1276, may be furnished when specified in contract or order (see MIL-PRF-83421 ordering data).

Leads of .562 inch (14.27 mm) and larger case diameters: Type C34 of MIL-STD-1276.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Rated voltage: AC (see table I), DC (see table I and table II).

TABLE II. DC voltage ratings.

Styles	Volts, dc
CRH31	30
CRH32	50
CRH33	100
CRH34	200
CRH35	400

DC operating temperature range: -65°C to +125°C at full rated voltage.

AC operating temperature range: -65°C to +85°C; derate linearly from +85°C to 50 percent of rated voltage at +100°C.

Failure rate (FR) level: M (1.0%), P (0.1%), R (0.01%), and S (0.001%) (established at dc rated voltage at +125°C).

Burn-in: 140 percent of dc rated voltage shall be applied for 48 hours, minimum at +125°C +4°C, -0°C.

Thermal shock: Method 107 of MIL-STD-202, test condition B, 10 cycles.


Seal: Method 112 of MIL-STD-202, test condition C, procedure IIIa, followed by test condition B

Leakage-rate sensitivity: 10^{-6} atm cm^3/s.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202.

Terminal to terminal:

AC: 100 Hz ±10 Hz square wave, peak-to-peak voltage, three times dc rated voltage for 60 seconds, minimum but need not exceed 800 V peak-to-peak.

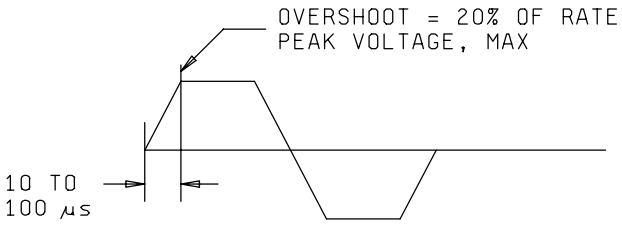

DC: 200 percent of dc rated voltage for 60 seconds, maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

Insulation resistance (IR): Method 302 of MIL-STD-202. Charge time 5 minutes, maximum; however, for capacitance values greater than 1.0 μF, an additional 1 minute per μF is permitted.

Terminal to terminal (dc rated voltage): See figure 2.

Terminals to case: 10,000 megohms, minimum.

Dissipation factor (DF): 0.15 percent maximum..

* Dielectric absorption: 0.1 percent, maximum.

Barometric pressure (reduced) for qualification only: Method 105 of MIL-STD-202, condition D (100,000 feet). 125 percent of dc rated voltage applied. See MIL-PRF-83421 for voltage limitations.

Immersion: Method 104 of MIL-STD-202, test condition C.

DWV:

Insulating sleeves: Greater than 4,000 volts, dc.

Terminal to terminal: 200 percent of dc rated voltage.

Terminals to case: 200 percent of dc rated voltage.

IR:

Insulating sleeves: 10,000 megohms, minimum.

Terminal to terminal: Not less than 50 percent of initial requirement.

Terminals to case: 5,000 megohms, minimum.

Δ Cap: Maximum of ±0.25 percent of initial measured value.

DF: 0.15 percent maximum.

Moisture resistance: Method 106 of MIL-STD-202.

DWV, IR, ΔCap., and DF: Requirements shall be the same as for immersion.

Low temperature life: In accordance with MIL-PRF-83421, except measurements shall be made at the following temperatures.

t_1 = +25°C: Record initial capacitance, dissipation factor, and insulation resistance.
t_2 = - 65°C: 48 hours, rated dc voltage applied.
t_3 = Maximum operating temperature: 2 hours rated dc voltage applied.
t_4 = +25°C: Record capacitance, dissipation factor and insulation resistance. Limits of change shall be as specified in table III.

TABLE III. Post measurement limits.

t_1 to t_4	Styles CRH31 through CRH35
Capacitance	±0.5% of initial measured value
Dissipation Factor	0.15% maximum
Insulation Resistance	Within initial requirement

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

Resistance to soldering heat: Method 210 of MIL-STD-202, test condition B.

Δ Cap.: Maximum ±0.25 percent of initial measured value.

Temperature coefficient: In accordance with MIL-PRF-83421. Capacitance shall be measured at the temperatures specified in table IV.

TABLE IV. Capacitance changes.

Temperature 1/	Styles CRH31 through CRH35
t_3 to t_2	± 2.0%
t_3 to t_4	± 1.0%
t_3 to t_1 or t_5	± 0.25%

1/ t_1 = +25°C
t_2 = +125°C
t_3 = +25°C
t_4 = -55°C
t_5 = +25°C

Life (at +125°C): Method 108 of MIL-STD-202.

Accelerated condition: 140 percent of dc rated voltage.

Rated condition: 100 percent of dc rated voltage.

IR:
Terminal to terminal: Not less than 33.3 percent of initial requirement.

Terminals to case: 5,000 megohms, minimum.

ΔCap.: Maximum of ±2.0 percent of initial measured value.

DF (at +25°C) after life: 0.25 percent, maximum.

AC conditioning: In accordance with MIL-PRF-83421 at rated voltage and 400Hz in accordance with table V.

TABLE V. AC conditioning test samples.


DC rated voltage (volts)	Capacitance range(μF)	Number samples 1/
30	.001 to 22.0	10
50	.001 to 10.0	10
100	.001 to 8.2	10
200	.001 to 3.9	10
400	.001 to 2.0	10

1/ Samples shall include five of the lowest and five of the highest capacitance values manufactured during the previous 6 months. If only one capacitance value was manufactured, ten samples of that value shall be tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

Marking: In accordance with MIL-PRF-83421.

Part or Identifying Number (PIN): Consists of the basic number of this specification sheet with a dash number coded as shown in the following:

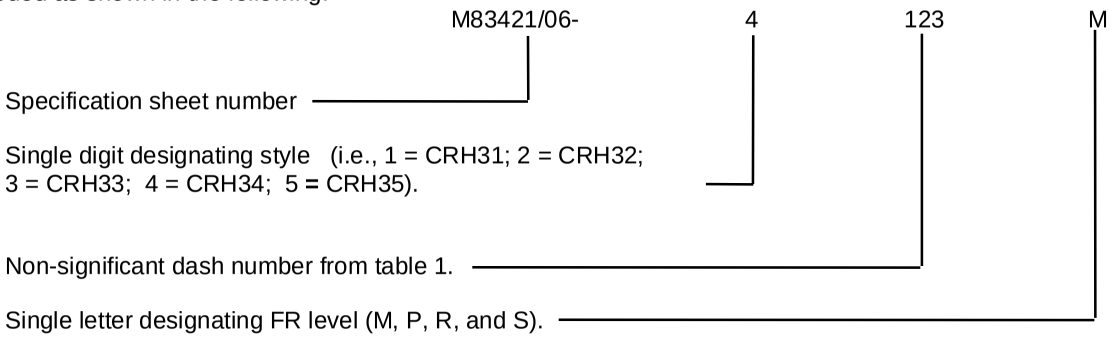

Packaging: Capacitors will be furnished in tape and reel packaging when so specified in the ordering data.

Changes from previous issue: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Preparing activity:
DLA - CC

(Project 5910-2023)

Review activities:
Army - AR
Navy - AS, CG, MC, OS, SH
Air Force - 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.