INCH-POUND


MIL-PRF-83421/6B
w/AMENDMENT 3
31 October 2003
SUPERSEDING
MIL-PRF-83421/6A
w/AMENDMENT 2
15 November 2002

PERFORMANCE SPECIFICATION SHEET

CAPACITORS, FIXED, METALLIZED PLASTIC FILM DIELECTRIC, DC AND AC, HERMETICALLY SEALED IN METAL CASES, ESTABLISHED RELIABILITY STYLES CRH31, CRH32, CRH33, CRH34, and CRH35

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this and specification MIL-PRF-83421.

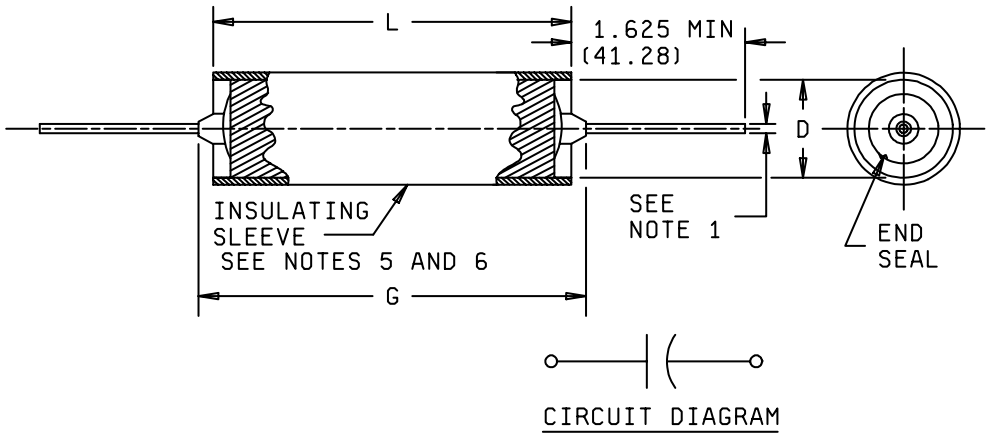

NOTES:
1. Number 22 AWG wire for case diameter of .235 (5.97 mm). Number 20 AWG wire for case diameter of .400 (10.16 mm). Number 18 AWG wire for case diameters of .562 (14.27 mm) and over.
2. See table I for additional dimensions.
3. Dimensions are in inches.
4. Metric equivalents are given for general information only and are in parentheses.
5. Insulating sleeve shall extend beyond the capacitor body. Insulating sleeve thickness shall not exceed .005 (0.13 mm).
6. Plastic insulating sleeve shall be transparent; marking shall be applied to the capacitor case.
7. Lead length may be a minimum of one inch (25.4 mm) long for use in tape and reel packaging, when specified in the ordering data.

FIGURE 1. Capacitor configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers.

CRH31 - 30 VOLTS (DC RATING)																
Capacitance value (nom) (in µf)	Dimensions (inches with mm in parentheses) 1/			DASH NUMBERS 2/						AC Ratings (sinusoidal operation from -65° to 85°C) 3/					
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						0 to 400Hz		4 KHz		40 KHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (A)	Volts	Current (A)	Volts	Current (A)
0.001	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1001-	1002-	1003-	1004-	1005-	1006-	22.0	.001	22.0	.001	22.0	.006
0.0012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1007-	1008-	1009-	1010-	1011-	1012-	22.0	.001	22.0	.001	22.0	.007
0.0015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1013-	1014-	1015-	1016-	1017-	1018-	22.0	.001	22.0	.001	22.0	.008
0.0018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1019-	1020-	1021-	1022-	1023-	1024-	22.0	.001	22.0	.001	22.0	.010
0.002	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1025-	1026-	1027-	1028-	1029-	1030-	22.0	.001	22.0	.001	22.0	.011
0.0022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1031-	1032-	1033-	1034-	1035-	1036-	22.0	.001	22.0	.001	22.0	.012
0.0027	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1037-	1038-	1039-	1040-	1041-	1042-	22.0	.001	22.0	.002	22.0	.015
0.0033	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1043-	1044-	1045-	1046-	1047-	1048-	22.0	.001	22.0	.002	22.0	.018
0.0039	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1049-	1050-	1051-	1052-	1053-	1054-	22.0	.001	22.0	.002	22.0	.021
0.0047	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1055-	1056-	1057-	1058-	1059-	1060-	22.0	.001	22.0	.003	22.0	.026
0.005	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1061-	1062-	1063-	1064-	1065-	1066-	22.0	.001	22.0	.003	22.0	.028
0.0056	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1067-	1068-	1069-	1070-	1071-	1072-	22.0	.001	22.0	.003	22.0	.031
0.0068	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1073-	1074-	1075-	1076-	1077-	1078-	22.0	.001	22.0	.004	22.0	.037
0.0082	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1079-	1080-	1081-	1082-	1083-	1084-	22.0	.001	22.0	.005	22.0	.045
0.01	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1085-	1086-	1087-	1088-	1089-	1090-	22.0	.001	22.0	.006	22.0	.055
0.012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1091-	1092-	1093-	1094-	1095-	1096-	22.0	.001	22.0	.007	22.0	.066
0.015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1097-	1098-	1099-	1100-	1101-	1102-	22.0	.001	22.0	.008	22.0	.082
0.018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1103-	1104-	1105-	1106-	1107-	1108-	22.0	.001	22.0	.010	22.0	.100
0.02	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1109-	1110-	1111-	1112-	1113-	1114-	22.0	.001	22.0	.011	22.0	.110
0.022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	1115-	1116-	1117-	1118-	1119-	1120-	22.0	.001	22.0	.012	22.0	.120
0.027	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1121-	1122-	1123-	1124-	1125-	1126-	22.0	.002	22.0	.015	22.0	.150
0.033	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1127-	1128-	1129-	1130-	1131-	1132-	22.0	.002	22.0	.018	22.0	.180
0.039	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1133-	1134-	1135-	1136-	1137-	1138-	22.0	.002	22.0	.021	22.0	.220
0.047	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1139-	1140-	1141-	1142-	1143-	1144-	22.0	.003	22.0	.026	22.0	.260
0.05	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1145-	1146-	1147-	1148-	1149-	1150-	22.0	.003	22.0	.028	22.0	.280
0.056	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	1151-	1152-	1153-	1154-	1155-	1156-	22.0	.003	22.0	.031	22.0	.310
0.068	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	1157-	1158-	1159-	1160-	1161-	1162-	22.0	.004	22.0	.037	22.0	.370
0.082	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	1163-	1164-	1165-	1166-	1167-	1168-	22.0	.005	22.0	.045	22.0	.450
0.1	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	1169-	1170-	1171-	1172-	1173-	1174-	22.0	.006	22.0	.055	22.0	.550
0.12	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	1175-	1176-	1177-	1178-	1179-	1180-	22.0	.007	22.0	.066	22.0	.660
0.15	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	1181-	1182-	1183-	1184-	1185-	1186-	22.0	.008	22.0	.082	22.0	.830
0.18	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1187-	1188-	1189-	1190-	1191-	1192-	22.0	.010	22.0	.100	22.0	1.000
0.20	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1193-	1194-	1195-	1196-	1197-	1198-	22.0	.011	22.0	.110	20.0	1.000
0.22	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1199-	1200-	1201-	1202-	1203-	1204-	22.0	.012	22.0	.120	18.5	1.020
0.27	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1205-	1206-	1207-	1208-	1209-	1210-	22.0	.015	22.0	.150	17.0	1.150
0.33	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1211-	1212-	1213-	1214-	1215-	1216-	22.0	.018	22.0	.180	16.0	1.320
0.39	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	1217-	1218-	1219-	1220-	1221-	1222-	22.0	.021	22.0	.210	15.0	1.460
0.47	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	1223-	1224-	1225-	1226-	1227-	1228-	22.0	.026	22.0	.260	14.0	1.650

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

Capacitance value (nom) (in µf)	Dimensions (inches with mm in parentheses) 1/			DASH NUMBERS 2/						AC Ratings (sinusoidal operation from -65° to 85°C) 3/					
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						0 to 400Hz		4 KHz		40 KHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (A)	Volts	Current (A)	Volts	Current (A)
CRH31 - 30 VOLTS (DC RATING)															
0.50	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	1229-	1230-	1231-	1232-	1233-	1234-	22.0	.028	22.0	.280	13.5	1.690
0.56	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	1235-	1236-	1237-	1238-	1239-	1240-	22.0	.031	22.0	.310	12.9	1.810
0.68	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	1241-	1242-	1243-	1244-	1245-	1246-	22.0	.037	22.0	.370	12.0	2.040
0.82	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	1247-	1248-	1249-	1250-	1251-	1252-	22.0	.045	22.0	.450	10.0	2.050
1.0	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	1253-	1254-	1255-	1256-	1257-	1258-	22.0	.055	22.0	.550	8.4	2.100
1.2	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	1259-	1260-	1261-	1262-	1263-	1264-	22.0	.066	22.0	.660	7.2	2.150
1.5	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	1265-	1266-	1267-	1268-	1269-	1270-	22.0	.082	22.0	.830	5.8	2.170
1.8	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	1271-	1272-	1273-	1274-	1275-	1276-	22.0	.099	22.0	.990	4.8	2.200
2.0	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	1277-	1278-	1279-	1280-	1281-	1282-	22.0	.110	22.0	1.100	4.4	2.200
2.2	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	1283-	1284-	1285-	1286-	1287-	1288-	22.0	.120	22.0	1.210	4.0	2.200
2.7	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	1289-	1290-	1291-	1292-	1293-	1294-	22.0	.15	22.0	1.490	3.3	2.200
3.0	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	1295-	1296-	1297-	1298-	1299-	1300-	22.0	.17	22.0	1.650	2.9	2.200
3.3	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	1301-	1302-	1303-	1304-	1305-	1306-	22.0	.18	22.0	1.820	2.7	2.200
3.9	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	1307-	1308-	1309-	1310-	1311-	1312-	22.0	.21	22.0	2.140	2.3	2.200
4.7	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	1313-	1314-	1315-	1316-	1317-	1318-	22.0	.26	18.7	2.200	1.9	2.200
5.0	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	1319-	1320-	1321-	1322-	1323-	1324-	22.0	.28	17.6	2.200	1.8	2.200
5.6	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	1325-	1326-	1327-	1328-	1329-	1330-	22.0	.31	15.7	2.200	1.6	2.200
6.8	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	1331-	1332-	1333-	1334-	1335-	1336-	22.0	.37	13.0	2.200	1.3	2.200
8.0	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	1337-	1338-	1339-	1340-	1341-	1342-	22.0	.44	11.0	2.200	1.1	2.200
8.2	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	1343-	1344-	1345-	1346-	1347-	1348-	22.0	.45	10.7	2.200	1.1	2.200
10.0	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	1349-	1350-	1351-	1352-	1353-	1354-	22.0	.55	8.8	2.200	.88	2.200
12.0	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	1355-	1356-	1357-	1358-	1359-	1360-	22.0	.66	7.3	2.200	.73	2.200
15.0	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	1361-	1362-	1363-	1364-	1365-	1366-	22.0	.83	5.9	2.200	.59	2.200
20.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	1367-	1368-	1369-	1370-	1371-	1372-	22.0	1.10	4.4	2.200	.44	2.200
22.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	1373-	1374-	1375-	1376-	1377-	1378-	22.0	1.21	4.0	2.200	.40	2.200
CRH32 - 50 VOLTS (DC RATING)															
0.001	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2001-	2002-	2003-	2004-	2005-	2006-	36.0	.001	36.0	.001	36.0	.009
0.0012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2007-	2008-	2009-	2010-	2011-	2012-	36.0	.001	36.0	.001	36.0	.011
0.0015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2013-	2014-	2015-	2016-	2017-	2018-	36.0	.001	36.0	.001	36.0	.013
0.0018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2019-	2020-	2021-	2022-	2023-	2024-	36.0	.001	36.0	.002	36.0	.016
0.002	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2025-	2026-	2027-	2028-	2029-	2030-	36.0	.001	36.0	.002	36.0	.018
0.0022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2031-	2032-	2033-	2034-	2035-	2036-	36.0	.001	36.0	.002	36.0	.020
0.0027	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2037-	2038-	2039-	2040-	2041-	2042-	36.0	.001	36.0	.002	36.0	.024
0.0033	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2043-	2044-	2045-	2046-	2047-	2048-	36.0	.001	36.0	.003	36.0	.030
0.0039	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2049-	2050-	2051-	2052-	2053-	2054-	36.0	.001	36.0	.004	36.0	.035
0.0047	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2055-	2056-	2057-	2058-	2059-	2060-	36.0	.001	36.0	.004	36.0	.042

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

CRH32 - 50 VOLTS (DC RATING)																
Capacitance value (nom) (in µf)	Dimensions (inches with mm in parentheses) 1/			DASH NUMBERS 2/						AC Ratings (sinusoidal operation from -65° to 85°C) 3/					
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						0 to 400Hz		4 KHz		40 KHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (A)	Volts	Current (A)	Volts	Current (A)
0.005	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2061-	2062-	2063-	2064-	2065-	2066-	36.0	.001	36.0	.005	36.0	.045
0.0056	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2067-	2068-	2069-	2070-	2071-	2072-	36.0	.001	36.0	.005	36.0	.050
0.0068	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	2073-	2074-	2075-	2076-	2077-	2078-	36.0	.001	36.0	.006	36.0	.061
0.0082	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	2079-	2080-	2081-	2082-	2083-	2084-	36.0	.001	36.0	.007	36.0	.074
0.01	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	2085-	2086-	2087-	2088-	2089-	2090-	36.0	.001	36.0	.009	36.0	.090
0.012	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	2091-	2092-	2093-	2094-	2095-	2096-	36.0	.001	36.0	.011	36.0	.110
0.015	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	2097-	2098-	2099-	2100-	2101-	2102-	36.0	.001	36.0	.013	36.0	.140
0.018	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	2103-	2104-	2105-	2106-	2107-	2108-	36.0	.002	36.0	.016	36.0	.160
0.02	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	2109-	2110-	2111-	2112-	2113-	2114-	36.0	.002	36.0	.018	36.0	.180
0.022	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	2115-	2116-	2117-	2118-	2119-	2120-	36.0	.002	36.0	.020	36.0	.200
0.027	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	2121-	2122-	2123-	2124-	2125-	2126-	36.0	.002	36.0	.024	36.0	.240
0.033	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	2127-	2128-	2129-	2130-	2131-	2132-	36.0	.003	36.0	.030	36.0	.300
0.039	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	2133-	2134-	2135-	2136-	2137-	2138-	36.0	.004	36.0	.035	36.0	.350
0.047	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	2139-	2140-	2141-	2142-	2143-	2144-	36.0	.004	36.0	.042	36.0	.420
0.05	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	2145-	2146-	2147-	2148-	2149-	2150-	36.0	.005	36.0	.045	36.0	.450
0.056	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	2151-	2152-	2153-	2154-	2155-	2156-	36.0	.005	36.0	.050	36.0	.500
0.068	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	2157-	2158-	2159-	2160-	2161-	2162-	36.0	.006	36.0	.061	34.0	.580
0.082	0.813 (20.65)	0.193 (4.90)	1.013 (25.73)	2163-	2164-	2165-	2166-	2167-	2168-	36.0	.007	36.0	.074	32.0	.660
0.1	0.813 (20.65)	0.193 (4.90)	1.013 (25.73)	2169-	2170-	2171-	2172-	2173-	2174-	36.0	.009	36.0	.090	30.0	.750
0.12	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	2175-	2176-	2177-	2178-	2179-	2180-	36.0	.011	36.0	.110	30.0	.900
0.15	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	2181-	2182-	2183-	2184-	2185-	2186-	36.0	.013	36.0	.140	26.0	.980
0.18	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	2187-	2188-	2189-	2190-	2191-	2192-	36.0	.016	36.0	.160	25.0	1.130
0.20	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	2193-	2194-	2195-	2196-	2197-	2198-	36.0	.018	36.0	.180	24.0	1.200
0.22	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	2199-	2200-	2201-	2202-	2203-	2204-	36.0	.020	36.0	.200	23.0	1.270
0.27	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	2205-	2206-	2207-	2208-	2209-	2210-	36.0	.024	36.0	.240	19.0	1.280
0.33	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	2211-	2212-	2213-	2214-	2215-	2216-	36.0	.030	36.0	.300	18.0	1.480
0.39	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	2217-	2218-	2219-	2220-	2221-	2222-	36.0	.035	36.0	.350	17.0	1.660
0.47	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	2223-	2224-	2225-	2226-	2227-	2228-	36.0	.042	36.0	.420	15.7	1.850
0.50	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	2229-	2230-	2231-	2232-	2233-	2234-	36.0	.045	36.0	.450	15.2	1.900
0.56	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	2235-	2236-	2237-	2238-	2239-	2240-	36.0	.050	36.0	.500	14.4	2.010
0.68	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	2241-	2242-	2243-	2244-	2245-	2246-	36.0	.061	36.0	.610	14.0	2.380
0.82	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	2247-	2248-	2249-	2250-	2251-	2252-	36.0	.074	36.0	.740	12.0	2.460
1.0	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	2253-	2254-	2255-	2256-	2257-	2258-	36.0	.09	36.0	.900	10.0	2.500
1.2	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	2259-	2260-	2261-	2262-	2263-	2264-	36.0	.11	36.0	1.080	9.1	2.730
1.5	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	2265-	2266-	2267-	2268-	2269-	2270-	36.0	.14	36.0	1.350	7.7	2.900
1.8	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	2271-	2272-	2273-	2274-	2275-	2276-	36.0	.16	36.0	1.620	6.6	3.000
2.0	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	2277-	2278-	2279-	2280-	2281-	2282-	36.0	.18	36.0	1.800	6.2	3.100
2.2	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	2283-	2284-	2285-	2286-	2287-	2288-	36.0	.20	36.0	1.980	5.8	3.200

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

Capacitance value (nom) (in µf)	Dimensions (inches with mm in parentheses) 1/			DASH NUMBERS 2/						AC Ratings (sinusoidal operation from -65° to 85°C) 3/					
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						0 to 400Hz		4 KHz		40 KHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (A)	Volts	Current (A)	Volts	Current (A)
CRH32 - 50 VOLTS (DC RATING)															
2.7	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	2289-	2290-	2291-	2292-	2293-	2294-	36.0	.24	36.0	2.430	5.0	3.340
3.0	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	2295-	2296-	2297-	2298-	2299-	2300-	36.0	.27	36.0	2.700	4.5	3.400
3.3	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	2301-	2302-	2303-	2304-	2305-	2306-	36.0	.30	36.0	2.970	4.2	3.500
3.9	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	2307-	2308-	2309-	2310-	2311-	2312-	36.0	.35	36.0	3.510	3.7	3.600
4.7	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	2313-	2314-	2315-	2316-	2317-	2318-	36.0	.42	31.0	3.600	3.1	3.600
5.0	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	2319-	2320-	2321-	2322-	2323-	2324-	36.0	.45	29.0	3.600	2.9	3.600
5.6	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	2325-	2326-	2327-	2328-	2329-	2330-	36.0	.50	26.0	3.600	2.6	3.600
6.8	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	2331-	2332-	2333-	2334-	2335-	2336-	36.0	.61	21.2	3.600	2.1	3.600
8.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	2337-	2338-	2339-	2340-	2341-	2342-	36.0	.72	18.0	3.600	1.8	3.600
8.2	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	2343-	2344-	2345-	2346-	2347-	2348-	36.0	.74	17.6	3.600	1.8	3.600
10.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	2349-	2350-	2351-	2352-	2353-	2354-	36.0	.90	14.4	3.600	1.4	3.600
CRH33 - 100 VOLTS (DC RATING)															
0.001	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3001-	3002-	3003-	3004-	3005-	3006-	60.0	.001	60.0	.002	60.0	.015
0.0012	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3007-	3008-	3009-	3010-	3011-	3012-	60.0	.001	60.0	.002	60.0	.018
0.0015	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3013-	3014-	3015-	3016-	3017-	3018-	60.0	.001	60.0	.002	60.0	.022
0.0018	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3019-	3020-	3021-	3022-	3023-	3024	60.0	.001	60.0	.003	60.0	.027
0.002	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3025-	3026-	3027-	3028-	3029-	3030-	60.0	.001	60.0	.003	60.0	.030
0.0022	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3031-	3032-	3033-	3034-	3035-	3036-	60.0	.001	60.0	.003	60.0	.033
0.0027	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3037-	3038-	3039-	3040-	3041-	3042-	60.0	.001	60.0	.004	60.0	.041
0.0033	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3043-	3044-	3045-	3046-	3047-	3048-	60.0	.001	60.0	.005	60.0	.050
0.0039	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3049-	3050-	3051-	3052-	3053-	3054-	60.0	.001	60.0	.006	60.0	.058
0.0047	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3055-	3056-	3057-	3058-	3059-	3060-	60.0	.001	60.0	.007	60.0	.071
0.005	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3061-	3062-	3063-	3064-	3065-	3066-	60.0	.001	60.0	.008	60.0	.075
0.0056	0.500 (12.70)	0.170 (4.32)	0.700 (17.78)	3067-	3068-	3069-	3070-	3071-	3072-	60.0	.001	60.0	.008	60.0	.084
0.0068	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	3073-	3074-	3075-	3076-	3077-	3078-	60.0	.001	60.0	.010	60.0	.10
0.0082	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	3079-	3080-	3081-	3082-	3083-	3084-	60.0	.001	60.0	.012	60.0	.12
0.01	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	3085-	3086-	3087-	3088-	3089-	3090-	60.0	.002	60.0	.015	60.0	.15
0.012	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	3091-	3092-	3093-	3094-	3095-	3096-	60.0	.002	60.0	.018	59.0	.18
0.015	0.687 (17.45)	0.170 (4.32)	0.887 (22.53)	3097-	3098-	3099-	3100-	3101-	3102-	60.0	.002	60.0	.022	58.0	.22
0.018	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	3103-	3104-	3105-	3106-	3107-	3108-	60.0	.003	60.0	.027	57.0	.26
0.02	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	3109-	3110-	3111-	3112-	3113-	3114-	60.0	.003	60.0	.030	55.0	.28
0.022	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	3115-	3116-	3117-	3118-	3119-	3120-	60.0	.003	60.0	.033	53.0	.29
0.027	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	3121-	3122-	3123-	3124-	3125-	3126-	60.0	.004	60.0	.041	51.0	.34
0.033	0.687 (17.45)	0.193 (4.90)	0.887 (22.53)	3127-	3128-	3129-	3130-	3131-	3132-	60.0	.005	60.0	.050	50.0	.41
0.039	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	3133-	3134-	3135-	3136-	3137-	3138-	60.0	.006	60.0	.059	48.0	.47
0.047	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	3139-	3140-	3141-	3142-	3143-	3144-	60.0	.007	60.0	.070	47.0	.55

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

CRH33 - 100 VOLTS (DC RATING)																
Capacitance value (nom) (in µf)	Dimensions (inches with mm in parentheses) 1/			DASH NUMBERS 2/						AC Ratings (sinusoidal operation from -65° to 85°C) 3/					
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						0 to 400Hz		4 KHz		40 KHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (A)	Volts	Current (A)	Volts	Current (A)
0.05	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	3145-	3146-	3147-	3148-	3149-	3150-	60.0	.008	60.0	.075	46.0	.58
0.056	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	3151-	3152-	3153-	3154-	3155-	3156-	60.0	.008	60.0	.084	46.0	.64
0.068	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	3157-	3158-	3159-	3160-	3161-	3162-	60.0	.010	60.0	.10	42.0	.71
0.082	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	3163-	3164-	3165-	3166-	3167-	3168-	60.0	.012	60.0	.12	38.0	.78
0.1	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	3169-	3170-	3171-	3172-	3173-	3174-	60.0	.015	60.0	.15	36.0	.90
0.12	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	3175-	3176-	3177-	3178-	3179-	3180-	60.0	.018	60.0	.18	35.0	1.05
0.15	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	3181-	3182-	3183-	3184-	3185-	3186-	60.0	.022	60.0	.23	33.0	1.24
0.18	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	3187-	3188-	3189-	3190-	3191-	3192-	60.0	.027	60.0	.27	31.0	1.40
0.20	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	3193-	3194-	3195-	3196-	3197-	3198-	60.0	.030	60.0	.30	30.0	1.50
0.22	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	3199-	3200-	3201-	3202-	3203-	3204-	60.0	.033	60.0	.33	27.0	1.50
0.27	1.063 (27.00)	0.312 (7.92)	1.263 (32.08)	3205-	3206-	3207-	3208-	3209-	3210-	60.0	.041	60.0	.41	24.0	1.62
0.33	1.063 (27.00)	0.312 (7.92)	1.263 (32.08)	3211-	3212-	3213-	3214-	3215-	3216-	60.0	.050	60.0	.50	23.0	1.90
0.39	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	3217-	3218-	3219-	3220-	3221-	3222-	60.0	.058	60.0	.59	22.0	2.15
0.47	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	3223-	3224-	3225-	3226-	3227-	3228-	60.0	.071	60.0	.71	21.0	2.47
0.50	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	3229-	3230-	3231-	3232-	3233-	3234-	60.0	.075	60.0	.75	20.0	2.50
0.56	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	3235-	3236-	3237-	3238-	3239-	3240-	60.0	.084	60.0	.84	19.0	2.64
0.68	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	3241-	3242-	3243-	3244-	3245-	3246-	60.0	.10	60.0	1.02	16.0	2.72
0.82	1.125 (28.58)	0.500 (12.70)	1.325 (33.66)	3247-	3248-	3249-	3250-	3251-	3252-	60.0	.12	60.0	1.23	14.0	2.87
1.0	1.125 (28.58)	0.562 (14.27)	1.325 (33.66)	3253-	3254-	3255-	3256-	3257-	3258-	60.0	.15	60.0	1.50	12.0	3.00
1.2	1.125 (28.58)	0.562 (14.27)	1.325 (33.66)	3259-	3260-	3261-	3262-	3263-	3264-	60.0	.18	60.0	1.80	11.0	3.25
1.5	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	3265-	3266-	3267-	3268-	3269-	3270-	60.0	.23	60.0	2.26	10.0	3.75
1.8	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	3271-	3272-	3273-	3274-	3275-	3276-	60.0	.27	60.0	2.70	8.5	3.96
2.0	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	3277-	3278-	3279-	3280-	3281-	3282-	60.0	.30	60.0	3.00	8.1	4.10
2.2	1.375 (34.93)	0.670 (17.02)	1.575 (40.01)	3283-	3284-	3285-	3286-	3287-	3288-	60.0	.33	60.0	3.31	7.5	4.12
2.7	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	3289-	3290-	3291-	3292-	3293-	3294-	60.0	.41	60.0	4.05	6.5	4.40
3.0	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	3295-	3296-	3297-	3298-	3299-	3300-	60.0	.45	60.0	4.51	6.0	4.51
3.3	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	3301-	3302-	3303-	3304-	3305-	3306-	60.0	.50	55.0	4.73	5.5	4.55
3.9	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	3307-	3308-	3309-	3310-	3311-	3312-	60.0	.59	49.0	4.90	5.0	4.90
4.7	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	3313-	3314-	3315-	3316-	3317-	3318-	60.0	.71	43.0	5.0	4.3	5.0
5.0	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	3319-	3320-	3321-	3322-	3323-	3324-	60.0	.75	40.0	5.0	4.0	5.0
5.6	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	3325-	3326-	3327-	3328-	3329-	3330-	60.0	.84	36.0	5.0	3.6	5.0
6.8	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	3331-	3332-	3333-	3334-	3335-	3336-	60.0	1.02	29.0	5.0	3.0	5.0
8.0	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	3337-	3338-	3339-	3340-	3341-	3342-	60.0	1.20	25.0	5.0	2.5	5.0
8.2	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	3343-	3344-	3345-	3346-	3347-	3348-	60.0	1.23	24.4	5.0	2.4	5.0
10.0	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	3349-	3350-	3351-	3352-	3353-	3354-	60.0	1.50	20.0	5.0	2.0	5.0

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

CRH34 - 200 VOLTS (DC RATING)																
Capacitance value (nom) (in µf)	Dimensions (inches with mm in parentheses) 1/			DASH NUMBERS 2/						AC Ratings (sinusoidal operation from -65° to 85°C) 3/					
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						0 to 400Hz		4 KHz		40 KHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (A)	Volts	Current (A)	Volts	Current (A)
0.001	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4001-	4002-	4003-	4004-	4005-	4006-	120	.001	120	.003	80	.020
0.0012	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4007-	4008-	4009-	4010-	4011-	4012-	120	.001	120	.004	80	.024
0.0015	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4013-	4014-	4015-	4016-	4017-	4018-	120	.001	120	.004	80	.030
0.0018	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4019-	4020-	4021-	4022-	4023-	4024-	120	.001	120	.005	80	.036
0.002	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4025-	4026-	4027-	4028-	4029-	4030-	120	.001	120	.006	80	.040
0.0022	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4031-	4032-	4033-	4034-	4035-	4036-	120	.001	120	.007	80	.044
0.0027	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4037-	4038-	4039-	4040-	4041-	4042-	120	.001	120	.008	80	.054
0.0033	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4043-	4044-	4045-	4046-	4047-	4048-	120	.001	120	.010	80	.066
0.0039	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4049-	4050-	4051-	4052-	4053-	4054-	120	.001	120	.012	80	.078
0.0047	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4055-	4056-	4057-	4058-	4059-	4060-	120	.001	120	.014	80	.094
0.005	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4061-	4062-	4063-	4064-	4065-	4066-	120	.002	120	.015	80	.10
0.0056	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4067-	4068-	4069-	4070-	4071-	4072-	120	.002	120	.017	80	.11
0.0068	0.562 (14.27)	0.170 (4.32)	0.762 (19.35)	4073-	4074-	4075-	4076-	4077-	4078-	120	.002	120	.020	80	.14
0.0082	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	4079-	4080-	4081-	4082-	4083-	4084-	120	.002	120	.025	80	.16
0.01	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	4085-	4086-	4087-	4088-	4089-	4090-	120	.003	120	.030	80	.20
0.012	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	4091-	4092-	4093-	4094-	4095-	4096-	120	.004	120	.036	78	.23
0.015	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	4097-	4098-	4099-	4100-	4101-	4102-	120	.004	120	.045	76	.29
0.018	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	4103-	4104-	4105-	4106-	4107-	4108-	120	.005	120	.054	74	.33
0.02	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	4109-	4110-	4111-	4112-	4113-	4114-	120	.006	120	.060	71	.36
0.022	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	4115-	4116-	4117-	4118-	4119-	4120-	120	.007	120	.066	68	.37
0.027	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	4121-	4122-	4123-	4124-	4125-	4126-	120	.008	120	.081	65	.44
0.033	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	4127-	4128-	4129-	4130-	4131-	4132-	120	.010	120	.099	62	.51
0.039	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	4133-	4134-	4135-	4136-	4137-	4138-	120	.012	120	.12	60	.59
0.047	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	4139-	4140-	4141-	4142-	4143-	4144-	120	.014	120	.14	57	.67
0.05	0.687 (17.45)	0.312 (7.92)	0.887 (22.53)	4145-	4146-	4147-	4148-	4149-	4150-	120	.015	120	.15	56	.70
0.056	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	4151-	4152-	4153-	4154-	4155-	4156-	120	.017	120	.17	56	.78
0.068	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	4157-	4158-	4159-	4160-	4161-	4162-	120	.020	120	.20	50	.85
0.082	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	4163-	4164-	4165-	4166-	4167-	4168-	120	.025	120	.25	44	.90
0.1	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	4169-	4170-	4171-	4172-	4173-	4174-	120	.030	120	.30	42	1.10
0.12	0.813 (20.65)	0.312 (7.92)	1.013 (20.65)	4175-	4176-	4177-	4178-	4179-	4180-	120	.036	120	.36	40	1.20
0.15	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	4181-	4182-	4183-	4184-	4185-	4186-	120	.045	120	.45	36	1.34
0.18	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	4187-	4188-	4189-	4190-	4191-	4192-	120	.054	120	.54	34	1.54
0.20	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	4193-	4194-	4195-	4196-	4197-	4198-	120	.060	120	.60	33	1.65
0.22	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	4199-	4200-	4201-	4202-	4203-	4204-	120	.066	120	.66	32	1.76
0.27	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4205-	4206-	4207-	4208-	4209-	4210-	120	.081	120	.81	29	1.96
0.33	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4211-	4212-	4213-	4214-	4215-	4216-	120	.099	120	.99	28	2.31

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

Capacitance value (nom) (in µf)	Dimensions (inches with mm in parentheses) 1/			DASH NUMBERS 2/						AC Ratings (sinusoidal operation from -65° to 85°C) 3/					
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						0 to 400Hz		4 KHz		40 KHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (A)	Volts	Current (A)	Volts	Current (A)
CRH34 - 200 VOLTS (DC RATING)															
0.39	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4217-	4218-	4219-	4220-	4221-	4222-	120	.12	120	1.17	27	2.63
0.47	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4223-	4224-	4225-	4226-	4227-	4228-	120	.14	120	1.41	26	3.06
0.50	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4229-	4230-	4231-	4232-	4233-	4234-	120	.15	120	1.50	25	3.13
0.56	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	4235-	4236-	4237-	4238-	4239-	4240-	120	.17	120	1.61	23	3.17
0.68	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	4241-	4242-	4243-	4244-	4245-	4246-	120	.20	120	1.87	20	3.40
0.82	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	4247-	4248-	4249-	4250-	4251-	4252-	120	.25	120	2.05	18	3.70
1.0	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	4253-	4254-	4255-	4256-	4257-	4258-	120	.30	120	2.25	15	3.75
1.2	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	4259-	4260-	4261-	4262-	4263-	4264-	120	.36	120	2.61	13.5	4.05
1.5	1.875 (47.63)	0.670 (17.02)	2.075 (52.71)	4265-	4266-	4267-	4268-	4269-	4270-	120	.45	120	3.20	12	4.50
1.8	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	4271-	4272-	4273-	4274-	4275-	4276-	120	.54	110	3.74	11	5.00
2.0	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	4277-	4278-	4279-	4280-	4281-	4282-	120	.60	100	4.05	10	5.00
2.2	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	4283-	4284-	4285-	4286-	4287-	4288-	120	.66	90.5	4.20	9.1	5.00
2.5	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	4289-	4290-	4291-	4292-	4293-	4294-	120	.75	80	4.31	8	5.00
2.7	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	4295-	4296-	4297-	4298-	4299-	4300-	120	.81	77	4.60	7.7	5.20
3.0	1.875 (47.63)	1.000 (25.40)	2.075 (52.71)	4301-	4302-	4303-	4304-	4305-	4306-	120	.90	70	5.04	7	5.27
3.3	1.875 (47.63)	1.000 (25.40)	2.075 (52.71)	4307-	4308-	4309-	4310-	4311-	4312-	120	.99	65	5.21	6.5	5.36
3.9	2.375 (60.33)	1.000 (25.40)	2.575 (65.41)	4313-	4314-	4315-	4316-	4317-	4318-	120	1.20	55	5.39	5.5	5.40
CRH35 - 400 VOLTS (DC RATING)															
0.001	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5001-	5002-	5003-	5004-	5005-	5006-	240	.001	240	.006	100	.025
0.0012	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5007-	5008-	5009-	5010-	5011-	5012-	240	.001	240	.007	100	.030
0.0015	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5013-	5014-	5015-	5016-	5017-	5018-	240	.001	240	.009	100	.037
0.0018	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5019-	5020-	5021-	5022-	5023-	5024-	240	.001	240	.011	100	.045
0.002	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5025-	5026-	5027-	5028-	5029-	5030-	240	.001	240	.012	100	.050
0.0022	0.562 (14.27)	0.193 (4.90)	0.762 (19.35)	5031-	5032-	5033-	5034-	5035-	5036-	240	.001	240	.013	100	.055
0.0027	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5037-	5038-	5039-	5040-	5041-	5042-	240	.002	240	.016	100	.068
0.0033	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5043-	5044-	5045-	5046-	5047-	5048-	240	.002	240	.020	100	.083
0.0039	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5049-	5050-	5051-	5052-	5053-	5054-	240	.002	240	.023	100	.097
0.0047	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5055-	5056-	5057-	5058-	5059-	5060-	240	.003	240	.028	100	.12
0.005	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5061-	5062-	5063-	5064-	5065-	5066-	240	.003	240	.030	100	.13
0.0056	0.562 (14.27)	0.235 (5.97)	0.762 (19.35)	5067-	5068-	5069-	5070-	5071-	5072-	240	.003	240	.034	100	.14
0.0068	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	5073-	5074-	5075-	5076-	5077-	5078-	240	.004	240	.041	100	.17
0.0082	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	5079-	5080-	5081-	5082-	5083-	5084-	240	.005	240	.049	100	.21
0.01	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	5085-	5086-	5087-	5088-	5089-	5090-	240	.006	240	.060	100	.25
0.012	0.687 (17.45)	0.235 (5.97)	0.887 (22.53)	5091-	5092-	5093-	5094-	5095-	5096-	240	.007	240	.072	100	.30
0.015	0.813 (20.65)	0.235 (5.97)	1.013 (25.73)	5097-	5098-	5099-	5100-	5101-	5102-	240	.009	240	.090	94	.35
0.018	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5103-	5104-	5105-	5106-	5107-	5108-	240	.011	240	.11	90	.41

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics, dimensions and dash numbers - Continued.

CRH35 - 400 VOLTS (DC RATING)																
Capacitance value (nom) (in µf)	Dimensions (inches with mm in parentheses) 1/			DASH NUMBERS 2/						AC Ratings (sinusoidal operation from -65° to 85°C) 3/					
	L ±.030 (.76)	D +.020 (.51) -.000	G, max	Capacitance tolerance value (in %)						0 to 400Hz		4 KHz		40 KHz	
				±0.25	±0.5	±1.0	±2.0	±5.0	±10.0	Volts	Current (A)	Volts	Current (A)	Volts	Current (A)
0.02	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5109-	5110-	5111-	5112-	5113-	5114-	240	.012	240	.12	88	.44
0.022	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5115-	5116-	5117-	5118-	5119-	5120-	240	.013	240	.13	85	.47
0.027	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5121-	5122-	5123-	5124-	5125-	5126-	240	.016	240	.16	81	.55
0.033	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5127-	5128-	5129-	5130-	5131-	5132-	240	.020	240	.20	78	.65
0.039	0.813 (20.65)	0.312 (7.92)	1.013 (25.73)	5133-	5134-	5135-	5136-	5137-	5138-	240	.023	240	.23	75	.73
0.047	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	5139-	5140-	5141-	5142-	5143-	5144-	240	.028	240	.28	71	.83
0.05	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	5145-	5146-	5147-	5148-	5149-	5150-	240	.030	240	.30	70	.88
0.056	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	5151-	5152-	5153-	5154-	5155-	5156-	240	.034	240	.34	67.5	.95
0.068	0.813 (20.65)	0.400 (10.16)	1.013 (25.73)	5157-	5158-	5159-	5160-	5161-	5162-	240	.041	240	.41	60	1.02
0.082	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	5163-	5164-	5165-	5166-	5167-	5168-	240	.049	240	.49	50	1.03
0.1	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	5169-	5170-	5171-	5172-	5173-	5174-	240	.060	240	.60	46	1.20
0.12	1.063 (27.00)	0.400 (10.16)	1.263 (32.08)	5175-	5176-	5177-	5178-	5179-	5180-	240	.072	240	.72	44.5	1.34
0.15	1.375 (34.93)	0.400 (10.16)	1.575 (40.01)	5181-	5182-	5183-	5184-	5185-	5186-	240	.090	240	.83	40	1.50
0.18	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	5187-	5188-	5189-	5190-	5191-	5192-	240	.11	240	.95	38	1.70
0.20	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	5193-	5194-	5195-	5196-	5197-	5198-	240	.12	240	1.03	37	1.85
0.22	1.375 (34.93)	0.500 (12.70)	1.575 (40.01)	5199-	5200-	5201-	5202-	5203-	5204-	240	.13	240	1.10	35	1.93
0.27	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	5205-	5206-	5207-	5208-	5209-	5210-	240	.16	240	1.21	33	2.24
0.33	1.375 (34.93)	0.562 (14.27)	1.575 (40.01)	5211-	5212-	5213-	5214-	5215-	5216-	240	.20	240	1.32	32	2.65
0.39	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	5217-	5218-	5219-	5220-	5221-	5222-	240	.23	240	1.48	32	3.14
0.47	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	5223-	5224-	5225-	5226-	5227-	5228-	240	.28	240	1.68	31	3.64
0.50	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	5229-	5230-	5231-	5232-	5233-	5234-	240	.30	240	1.75	30	3.75
0.56	1.875 (47.63)	0.562 (14.27)	2.075 (52.71)	5235-	5236-	5237-	5238-	5239-	5240-	240	.34	240	1.92	29	4.05
0.68	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	5241-	5242-	5243-	5244-	5245-	5246-	240	.41	240	2.26	26	4.50
0.82	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	5247-	5248-	5249-	5250-	5251-	5252-	240	.49	234	2.63	23.4	4.80
1.0	1.875 (47.63)	0.750 (19.05)	2.075 (52.71)	5253-	5254-	5255-	5256-	5257-	5258-	240	.60	208	3.00	20.8	5.20
1.2	1.875 (47.63)	1.000 (25.4)	2.075 (52.71)	5259-	5260-	5261-	5262-	5263-	5264-	240	.72	183	3.48	18.3	5.50
1.5	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	5265-	5266-	5267-	5268-	5269-	5270-	240	.90	160	4.14	16.0	6.00
1.8	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	5271-	5272-	5273-	5274-	5275-	5276-	240	1.08	150	4.69	15.0	6.80
2.0	2.375 (60.33)	1.000 (25.4)	2.575 (65.41)	5277-	5278-	5279-	5280-	5281-	5282-	240	1.20	140	5.00	14.0	7.00

1/ L and D dimensions are bare case dimensions.
2/ The complete dash number will include the applicable FR level symbol (M, P, R or S) as a suffix.
3/ For +100°C operation, linearly derate +85°C rating by 50 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

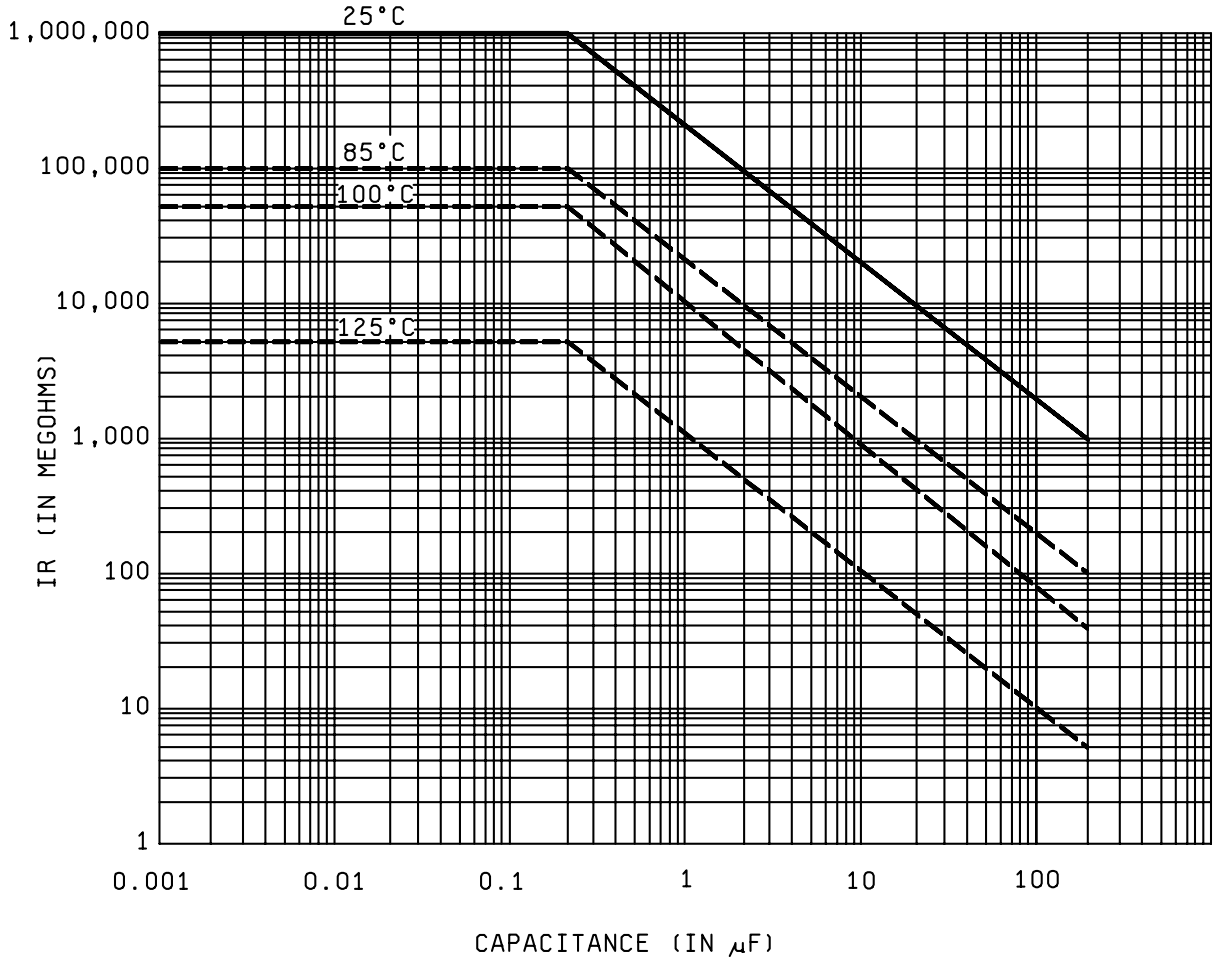


FIGURE 2. Insulation resistance versus capacitance value.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Dielectric: Polyphenylene sulfide, metallized.

Case material: Nonmagnetic.

Leads:

Leads of .500 inch (12.70 mm) and smaller case diameters: Solder-coated copper clad steel, type N21 of MIL-STD-1276, may be furnished when specified in contract or order (see MIL-PRF-83421 ordering data).

Leads of .562 inch (14.27 mm) and larger case diameters: Type C34 of MIL-STD-1276.

Capacitance value: See table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

Capacitance tolerance: See table I.

Rated voltage: AC (see table I), DC (see table I and table II).

TABLE II. DC voltage ratings.

Styles	Volts, dc
CRH31	30
CRH32	50
CRH33	100
CRH34	200
CRH35	400

DC operating temperature range: -65°C to +125°C at full rated voltage.

AC operating temperature range: -65°C to +85°C; derate linearly from +85°C to 50 percent of rated voltage at +100°C.

Failure rate (FR) level: M (1.0%), P (0.1%), R (0.01%), and S (0.001%) (established at dc rated voltage at +125°C).

Burn-in: 140 percent of dc rated voltage shall be applied for 48 hours, minimum at +125°C +4°C, -0°C.

Thermal shock: Method 107 of MIL-STD-202, test condition B, 10 cycles.


Seal: Method 112 of MIL-STD-202, test condition C, procedure IIIa with the following exceptions and details: a bomb pressure of 45 ±5 lbf/in^2 (gage), exposure time of 1 hour +1, -0 hour, dwell time of 1 hour maximum, and reject limit of $R_1 = 1 \times 10^{-6}$ atm cm^3/s. Upon completion of test condition C, perform either test condition A, test condition B with mineral oil, or test condition D.

Leakage-rate sensitivity: 10^{-6} atm cm^3/s.

Dielectric withstanding voltage (DWV): Method 301 of MIL-STD-202.

Terminal to terminal:

AC: 100 Hz ±10 Hz square wave, peak-to-peak voltage, three times dc rated voltage for 60 seconds, minimum but need not exceed 800 V peak-to-peak.

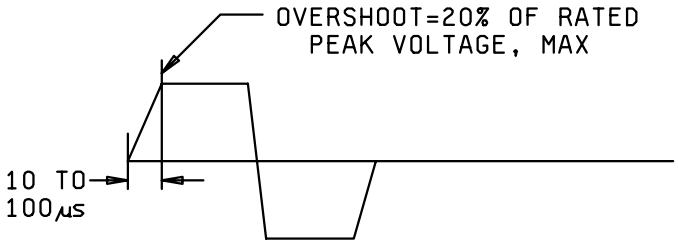

DC: 200 percent of dc rated voltage for 60 seconds, maximum.

Insulation resistance (IR): Method 302 of MIL-STD-202. Charge time 5 minutes, maximum; however, for capacitance values greater than 1.0 μF, an additional 1 minute per μF is permitted.

Terminal to terminal (dc rated voltage): See figure 2.

Terminals to case: 10,000 megohms, minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

Dissipation factor (DF): 0.15 percent maximum.

Dielectric absorption: 0.1 percent, maximum.

Barometric pressure (reduced) for qualification only: Method 105 of MIL-STD-202, condition D (100,000 feet). 125 percent of dc rated voltage applied. See MIL-PRF-83421 for voltage limitations.

* Vibration, random (optional): In accordance with MIL-PRF-83421 when ordered with "-" replaced with "H" in the PIN, (i.e. M83421/06H4123M).

Immersion: Method 104 of MIL-STD-202, test condition C.

DWV:

Insulating sleeves: Greater than 4,000 volts, dc.

Terminal to terminal: 200 percent of dc rated voltage.

Terminals to case: 200 percent of dc rated voltage.

IR:

Insulating sleeves: 10,000 megohms, minimum.

Terminal to terminal: Not less than 50 percent of initial requirement.

Terminals to case: 5,000 megohms, minimum.

ΔCapacitance: Maximum of ±0.25 percent of initial measured value.

DF: 0.15 percent maximum.

Moisture resistance: Method 106 of MIL-STD-202.

DWV, IR, ΔCapacitance, and DF: Requirements shall be the same as for immersion.

Low temperature life: In accordance with MIL-PRF-83421, except measurements shall be made at the following temperatures.

t_1 = +25°C: Record initial capacitance, dissipation factor, and insulation resistance.
t_2 = - 65°C: 48 hours, rated dc voltage applied.
t_3 = Maximum operating temperature: 2 hours rated dc voltage applied.
t_4 = +25°C: Record capacitance, dissipation factor and insulation resistance. Limits of change shall be as specified in table III.

TABLE III. Post measurement limits.

t_1 to t_4	Styles CRH31 through CRH35
Capacitance	±0.5% of initial measured value
Dissipation Factor	0.15% maximum
Insulation Resistance	Within initial requirement

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

Resistance to soldering heat: Method 210 of MIL-STD-202, test condition B.

Δ Capacitance: Maximum ±0.25 percent of initial measured value.

Temperature coefficient: In accordance with MIL-PRF-83421. Capacitance shall be measured at the temperatures specified in table IV.

TABLE IV. Capacitance changes.

Temperature 1/	Styles CRH31 through CRH35
t_3 to t_2	± 2.0%
t_3 to t_4	± 1.0%
t_3 to t_1 or t_5	± 0.25%

1/ t_1 = +25°C
t_2 = +125°C
t_3 = +25°C
t_4 = -55°C
t_5 = +25°C

Life (at +125°C): Method 108 of MIL-STD-202.

Accelerated condition: 140 percent of dc rated voltage.

Rated condition: 100 percent of dc rated voltage.

IR:

Terminal to terminal: Not less than 33.3 percent of initial requirement.

Terminals to case: 5,000 megohms, minimum.

ΔCapacitance: Maximum of ±2.0 percent of initial measured value.

DF (at +25°C) after life: 0.25 percent, maximum.

AC conditioning: In accordance with MIL-PRF-83421 at 40kHz and rated voltage or rated current. Test samples shall be in accordance with table V.

TABLE V. AC conditioning test samples.


DC rated voltage (volts)	Capacitance range(μF)	Number samples 1/
30	.001 to 22.0	10
50	.001 to 10.0	10
100	.001 to 8.2	10
200	.001 to 3.9	10
400	.001 to 2.0	10

1/ Samples shall include five of the lowest and five of the highest capacitance values manufactured during the previous 6 months. If only one capacitance value was manufactured, ten samples of that value shall be tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.

* Marking: In accordance with MIL-PRF-83421.

Part or Identifying Number (PIN): Consists of the basic number of this specification sheet with a dash number coded as shown in the following:

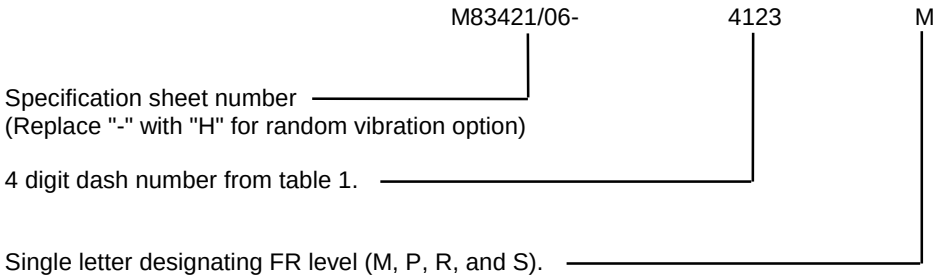

Packaging: Capacitors will be furnished in tape and reel packaging when so specified in the ordering data.

* NOTES:

Referenced documents. In addition to MIL-PRF-83421, this specification sheet references the following documents.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-202 Test Method Standard, Electronic and Electrical Component Parts

MIL-STD-1276 Leads for Electronic Component Parts

Amendment notations: The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2239)

Review activities:
Army - AR
* Navy - AS, MC, OS, SH
Air Force - 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:06Z
Check the source to verify that this is the current version before use.