INCH-POUND
MIL-DTL-2726/73C
31 August 2005
SUPERSEDING
MIL-R-2726/73B(SH)
3 July 1986


DETAIL SPECIFICATION SHEET

RECEPTACLE, ELECTRICAL, 15-AMPERE, 125-VOLT, BLADED TYPE, GROUNDED (PORTABLE) (SYMBOL NO. 1215)

Inactive for new design after 28 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-2726.

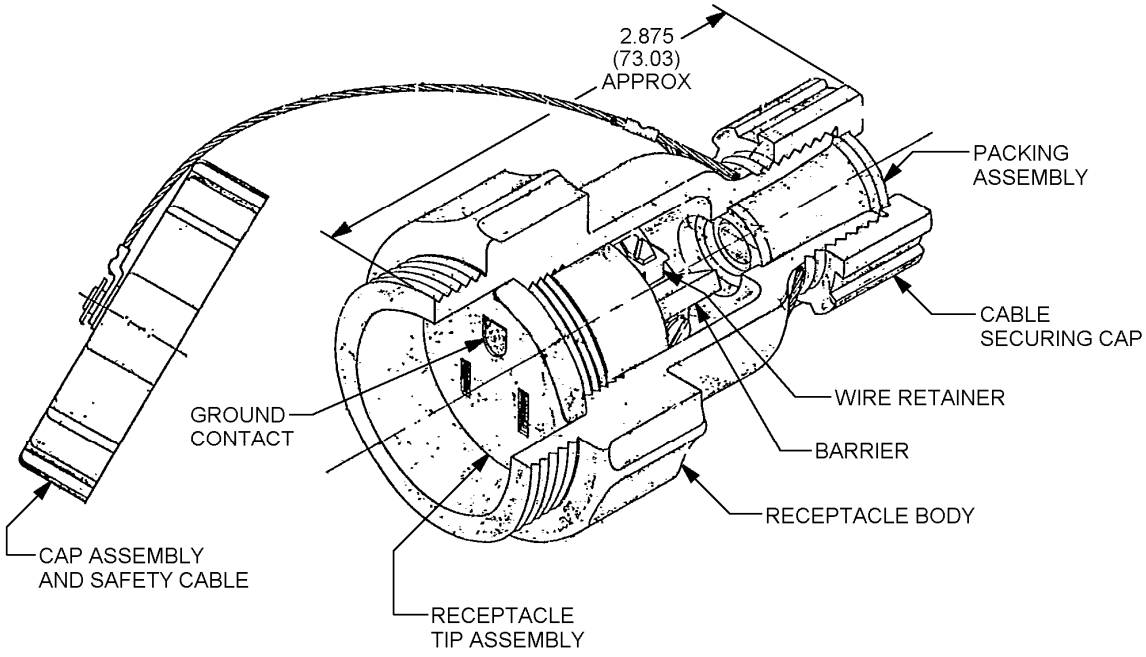


SH 10421

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses and given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± 0°30’ on angles.

FIGURE 1. Receptacle assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:37Z
Check the source to verify that this is the current version before use.

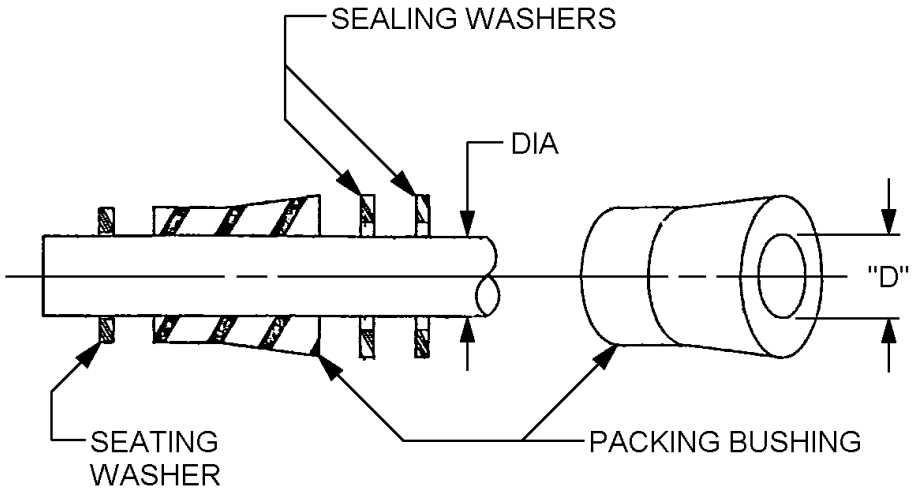


SH 10423

SELECT PACKING ASSEMBLY TO SUIT CABLE DIAMETER

CABLE DIA	BUSHING "D" DIA	PACKING ASSY Part or Identifying Number (PIN).
.400 -.440 (11.16)-(11.18)	.415 (10.54)	M2726/50-004-1
.440 - .520 (11.18)-(13.20)	.470 (11.94)	M2726/50-004-2
.520 - .560 (13.20)-(14.23)	.550 (13.97)	M2726-50-004-3

FIGURE 2. Instruction sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:37Z
Check the source to verify that this is the current version before use.

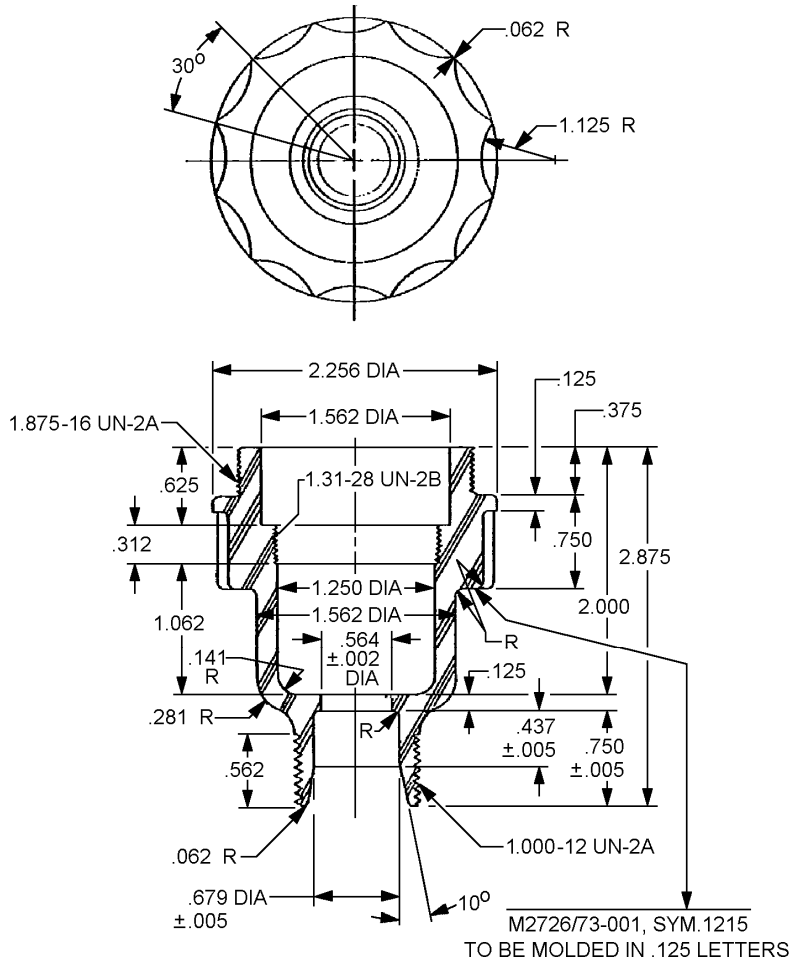


Inches	mm	Inches	mm
.002	0.05	.679	17.26
.005	0.13	.750	19.05
.062	1.57	1.000	25.40
.125	3.18	1.062	26.97
.141	3.58	1.125	28.58
.281	7.14	1.250	31.75
.312	7.92	1.31	33.3
.375	9.08	1.562	39.67
.473	11.10	1.875	47.63
.562	14.27	2.000	50.80
.564	14.33	2.256	57.30
.625	15.88	2.875	73.03

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± 0°30’ on angles.

FIGURE 3. Receptacle body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:37Z
Check the source to verify that this is the current version before use.

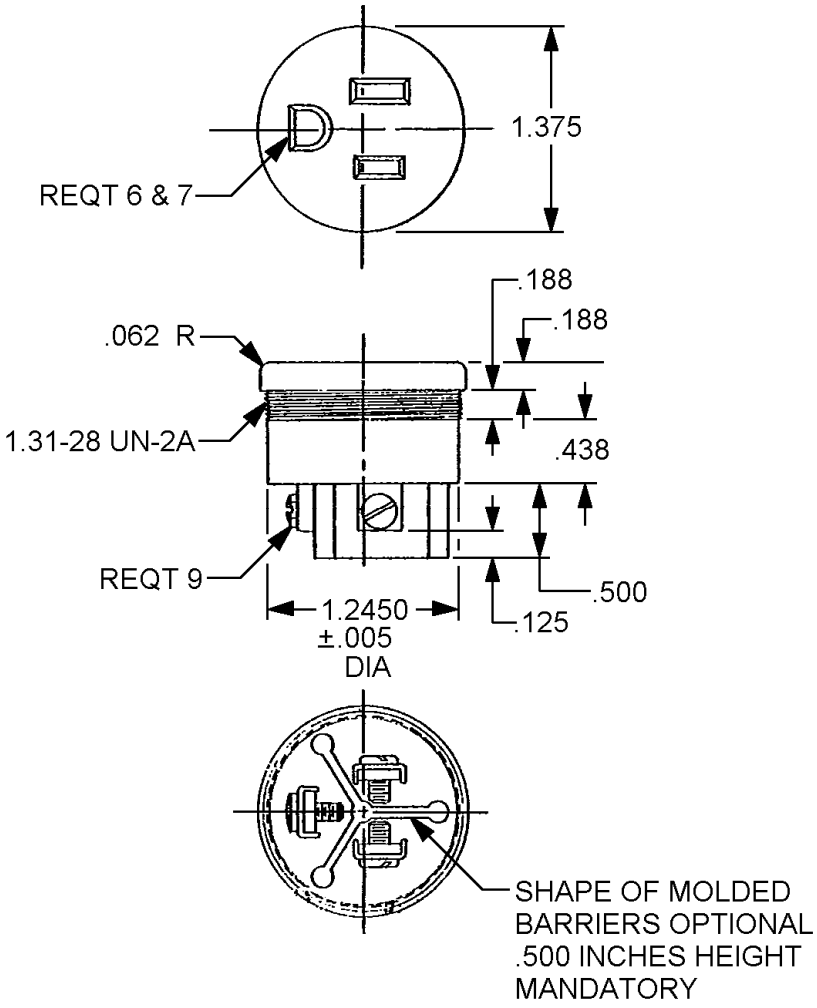


Inches	mm
.005	0.13
.062	1.57
.125	3.18
.188	4.78
.438	11.13
.500	12.70
1.245	31.62
1.31	33.3
1.375	34.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± 0°30’ on angles.

FIGURE 4. Receptacle tip assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:37Z
Check the source to verify that this is the current version before use.

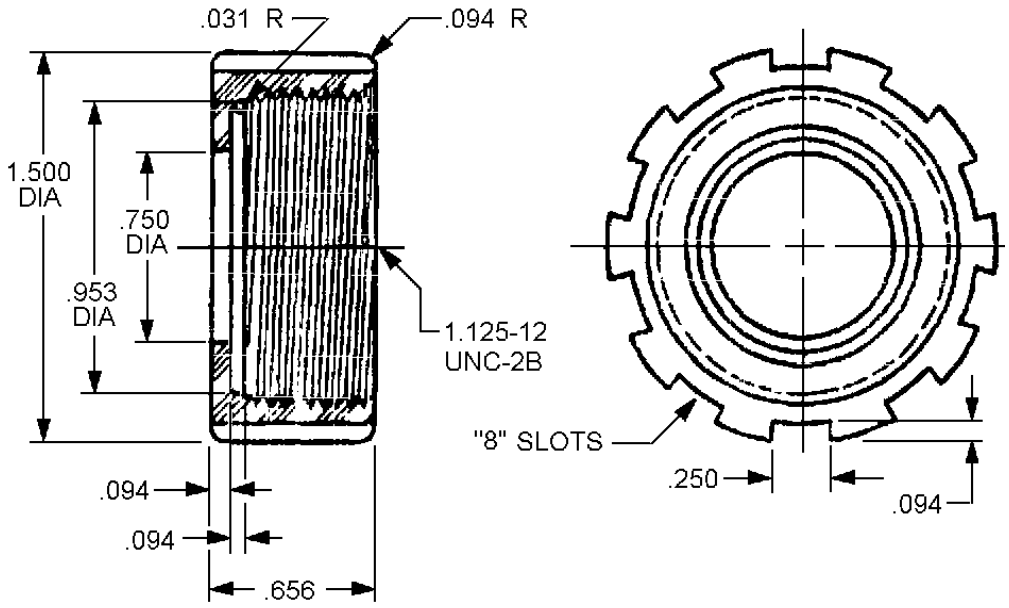


Inches	mm
.031	0.79
.093	2.36
.094	2.39
.250	6.35
.626	15.90
.656	16.66
.812	20.62
1.000	25.40
1.375	34.93

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .010 (0.25mm) per linear inch, whichever is greater.
4. Angular dimensions are ± 0°30'.
5. Threads as specified in FED-STD-H28/2.
6. Marking PIN: M19622/10-0002 tube size and manufacturer's logo or name in .125 inch high raised letters on face of cup (see MIL-S-19622).

FIGURE 5. Cable securing cap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:37Z
Check the source to verify that this is the current version before use.

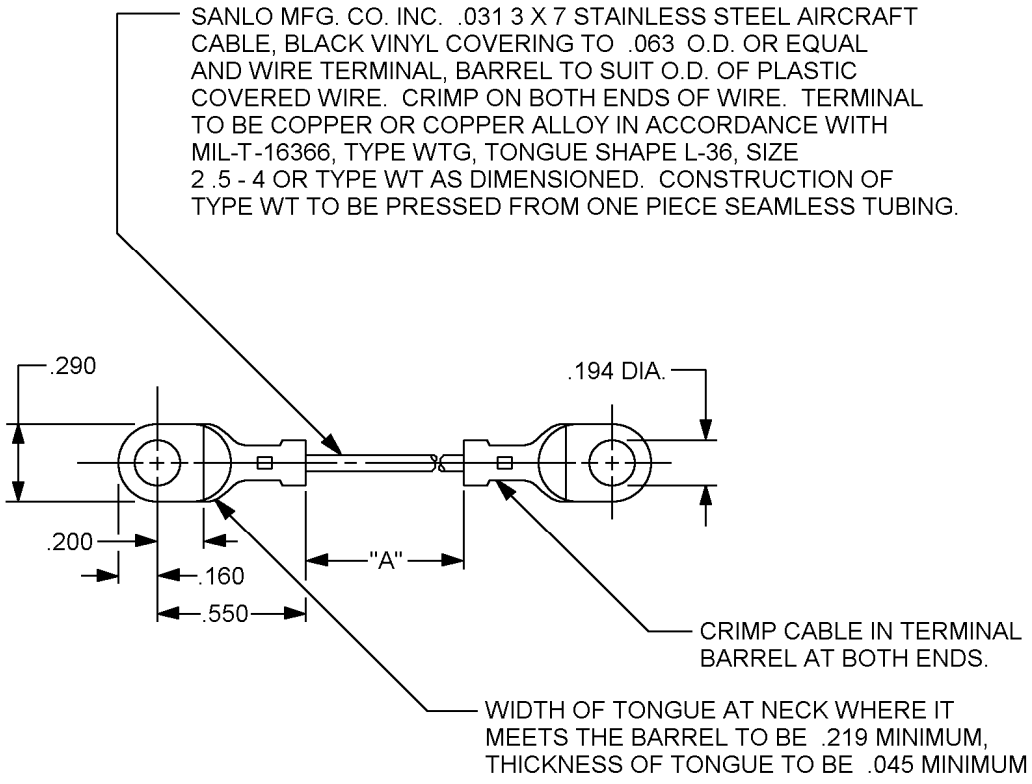

Inches	mm
.031	0.79
.045	1.79
.063	1.60
.160	4.06
.194	4.93
.200	5.08
.219	5.56
.290	7.37
.550	13.97

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Cable length “A” may be 6 inches or 10 inches.

FIGURE 6. Cable assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figures 1 through 6.

Effectiveness of enclosure: Watertight in accordance with MIL-STD-108.

Strain relief: 30 pounds.

Material: Receptacle body and end cap shall be molded polycarbonate (yellow) in accordance with ASTM-D3935. Receptacle tip assembly (contact insulation) shall be polycarbonate (yellow) or type MAI-60 (yellow) in accordance with ASTM-D5948. Contact material shall be phosphor bronze in accordance with ASTM-B139.

Receptacle: Contact arrangement shall conform to W-C-596/11, PIN: WC596/11-1. The ground contact shall be nickel-plated, 0.0003 inch thick.

Cable securing cap: See figure 5, PIN M19622/10-0002, except color shall be yellow and material may be polycarbonate, if desired.

Terminals: Shall be furnished with wire retainers and binding head screws. Ground screw shall be hexagonal head and shall be finished in a distinctive green color. Ground contact shall be nickel-plated.

Packing assemblies: MIL-DTL-2726/50, PIN M2726/50-004-1, M2726/50-004-2, M2726/50-004-3 shall be furnished with the receptacle assembly. User shall select size that most nearly fits the cable as shown on figure 2.

Mating plug: MIL-DTL-2726/38, PIN M2726/38-001 (not furnished).

Test cables: Type C0-03H0F (3/16) in accordance with MIL-DTL-3432 – use with M2726/50-004-1
MIL-DTL-24643 and MIL-DTL-24643/3 – use with M2726/50-004-2
Type C0-03H0F (3/14) in accordance with MIL-DTL-3432 – use with M2726/50-004-3.

Design: Receptacle tip assembly shall be threaded into receptacle body. Barriers shall be molded integral with receptacle tip and shall extent .125 inch minimum above the electrical contacts. End of receptacle body shall be flat for effective watertight seal against gasket of mating receptacle plug.

Instruction sheet: An instruction sheet with the information shown on figure 2 shall be furnished with each receptacle on paper 4 by 6 inches.

Safety cable: See figure 6, MS17339 PIN MS17339-2, looped around neck of receptacle body and crimped to prevent removal.

Cap assembly: In accordance with MIL-DTL-2726/37.

Intended use: Shipboard, on weather decks or in high moisture environments below decks, for maintaining watertight seal when used in a cable extension assembly with plug connector, M2726/38-001 in accordance with MIL-DTL-2726/38.

Electrical rating: 15-amperes, 125-volts, alternating current, 60-hertz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:37Z
Check the source to verify that this is the current version before use.

Tests: The shock and vibration tests required by MIL-DTL-2726 are not required for the receptacle covered by this specification.

PIN: M2726/73-001.

VERIFICATION

Verification shall be as specified in MIL-DTL -2726 and table I herein. The first article and conformance inspections shall consist of the inspections as specified in table I, in the order shown.

TABLE I. First article and conformance inspection.

Inspection	First article	Conformance
Examination	X	X
Insulation resistance	X	X
Dielectric withstanding voltage	X	X
Contact resistance	X	X
Endurance	X	
Salt spray	X	
Contact resistance	X	
Current load	X	
Vibration	X	
Shock	X	
Effectiveness of enclosure	X	X
Dielectric withstanding voltage	X	
Rockwell hardness	X	

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

ASTM-B139
ASTM-D3935
ASTM-D5948
FED-STD-H28/2
MIL-DTL-24643
MIL-DTL-24643/3
MIL-DTL-2726/37
MIL-DTL-2726/38
MIL-DTL-2726/50
MIL-DTL-3432
MIL-S-19622
MIL-STD-108
MS17339
MIL-T-16366
W-C-596/11

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:37Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
DLA - CC
Navy - SH

Review activities:
Army - AV, MI

Preparing activity:
DLA - CC

(Project 5935-4764-000)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:37Z
Check the source to verify that this is the current version before use.