MIL-M-21393A(AS)
Amendment-6
15 November 1968
Superseding
Amendment-5
1 July 1967

MILITARY SPECIFICATION

MICROPHONE, DYNAMIC M-92C/U

This amendment forms a part of Military Specification MIL-M-21393A(WEP) dated 1 July 1960 and has been approved by the Naval Air Systems Command, Department of the Navy.

By this amendment basic MIL-M-21393A(WEP) is changed to MIL-M-21393A(AS) and throughout the specification Bureau of Naval Weapons shall be changed to Naval Air Systems Command.

Page 1, Specification Title: Delete "M-92/U" and substitute "M-92C/U"

Make this same change wherever "M-92/U" appears in this specification.

Page 1, paragraph 2.1, first sentence: Add

"(See 6.3(4))

Page 1, paragraph 2.1, under SPECIFICATION Military: Delete

"MIL-E-5272 Environmental Testing, Aeronautical and Associated Equipment, General Specification for"

and add

"MIL-T-5422 Testing, Environmental, Aircraft Electronic Equipment

MIL-STD-781 Reliability Tests, Exponential Distribution"

Page 3, paragraph 3.3.5, first sentence: Add

"or Figure 1A"

FSC 5965

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:29Z
Check the source to verify that this is the current version before use.

Page 3, paragraphs 3.3.8, 3.3.8.1 and 3.3.8.2: Delete and substitute

"3.3.8 Reliability in Mean Time Between Failures - The microphones shall have a minimum of 500 hours mean (operating) time between failures when tested and accepted as outlined under the requirements of 4.5.4."

Page 3, paragraph 3.3.11: Add at end of first sentence.

"as modified by paragraph 3.5.11.1."

Page 4, paragraph 3.3.15.1: Delete "type FBE" and add

"and shall meet the performance requirements of this specification."

Page 4, paragraph 3.3.15.2: Delete and substitute

"3.3.15.2 Molded Plastic - Material - Molded plastic-material shall be in accordance with Specification MIL-M-14 and shall meet the performance requirements of this specification."

Page 5, paragraph 3.4.1.2: Add

"or Figure 1A"

Page 5, paragraph 3.4.1.3: Delete and substitute

"3.4.1.3 Contents - The microphone shall be composed of a microphone element, an amplifier, a push button switch and a housing with cordage and plug."

Page 5, paragraph 3.5.1 and 3.5.2: Delete "50± 3 db" and substitute

"54 ± 3 db"

Page 5, paragraph 3.5.2: Delete "Table I" and Substitute

"Figure 12"

Page 5, and 6, Table I: Delete

Page 6, paragraph 3.5.6: Delete

Page 6, paragraph 3.5.9: Delete and substitute

"3.5.9 Microphone Current - For test purposes, the microphone shall be connected as shown in the Standard Test Circuit, Figure 5, and the microphone D.C. current shall not exceed 35 ma.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:29Z
Check the source to verify that this is the current version before use.

Page 6, paragraph 3.5.10: Delete

"shall be contained in the hand grip and"

Page 6, Add "3.5.11 Susceptibility

3.5.11.1 Radiated R.F. Susceptibility - The microphone, when connected as shown in Figure 13, shall not evidence oscillation or other degradation of performance including extraneous signals or noise (i.e. output which does not correspond to a desired input) when subjected to any frequency and steady field intensity shown in Table V. The microphone shall not evidence oscillation or other degradation when subjected to the required steady field intensity for a period of three minutes at nine frequencies including end and mid frequency of each frequency band of Table V."

TABLE V

Frequency (MC)	Steady Field Intensity (Antenna Induced)
2-30	-4 db relative to 1.0 volt (0.63 volt) in a 41 inch vertical rod antenna*
30-52	-2 db relative to 1.0 volt (0.8 volt) in a half wave dipole antenna
225-400	24 db relative to 1.0 (16.0 volt) in a half wave dipole antenna

*As used with NF-105 Noise and Field Strength Meter or equivalent

Page 6, Add new paragraph as follows

"3.5.12 Voltage Transients Susceptibility - There shall be no degradation of performance or any change in DC current of the microphone as a result of the voltage transients test in accordance with paragraph 4.5.3.17."

Page 7, Paragraph 4.2: Delete "10 units" and substitute

"20 units"

*Page 7, paragraph 4.2 and 4.3: Delete reference to "Bureau of Naval Weapons" and substitute "U.S. Naval Ammunition Depot, Crane, Indiana 47522.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:29Z
Check the source to verify that this is the current version before use.

Page 7, Table II: Delete

"Impedance	4.5.3.4	X	X	X"

and add

"Radiated R.F. Susceptibility	4.5.3.13.1	X		X
"Reliability Assurance	4.5.4	X		*
"Voltage Transients	4.5.3.17	X		X

*Reliability Sampling Phase Tests shall be made per paragraph 4.5.4.2 and 4.5.4.3."

Page 9, paragraph 4.5.3.2: Delete "3.5.2 Table I" and substitute

"Figure 12"

Page 10, Paragraph 4.5.3.4: Delete

Page 10, paragraph 4.5.3.8: Delete and substitute

"4.5.3.8 Salt Spray - The microphone shall be subjected to the salt spray test of Specification MIL-T-5422 for a period of 50 hours."

Page 11, paragraph 4.5.3.10. Delete and substitute

"4.5.3.10 Humidity - The microphone shall be subjected to the humidity test of Specification MIL-T-5422."

Page 11, paragraph 4.5.3.12. Delete and substitute

"4.5.3.12 Vibration - The microphone shall be subjected to the appropriate vibration test of Specification MIL-T-5422."

Page 11, Add

"4.5.3.13.1 Radiated R. F. Susceptibility - The microphone shall be subjected to the Radiated R. F. Susceptibility test specified in 3.5.11.1."

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:29Z
Check the source to verify that this is the current version before use.

Page 11, Add new paragraph as follows:

"4.5.3.17 Voltage Transients Test - The microphone shall be subjected, through its output plug, to 350 volt pulses having a width of approximately 500 microseconds and a repetition rate of 2 pps. The pulses shall be applied for a period of five minutes in each polarity. The microphone shall be inactive during this test."

Page 11, Add

"4.5.4 Reliability Assurance Tests - Reliability Assurance Tests shall be conducted using MIL-STD-781. A Qualification Phase and Sampling Phase Tests shall be conducted.

4.5.4.1 Qualification Phase - Prior to the acceptance of equipments under the contract or order, a minimum of three (3) equipments shall be tested as outlined in MIL-STD-781, under the section entitled "Qualification Phase of Production Reliability Tests". The maximum number of equipments to be used shall be those listed in Table 5 of MIL-STD-781. For the Qualification Phase Test Level E shall be used. The Accept-Reject Criteria for the Test Plan V shall be used.

4.5.4.2 Reliability Sampling Phase Tests - Samples of the equipment shall be tested as outlined in MIL-STD-781, under the Section entitled "Sampling Phase of Production Reliability Tests". For the Sampling Phase Test Level E shall be used. The Accept-Reject Criteria for Test Plan VI shall be used to determine the length of the tests (until an accept or reject decision is reached).

4.5.4.2.1 Lot Size for sampling Phase - The equipments constructed during one month shall be one lot.

4.5.4.3 Test Details - The test details such as the length of the test cycle, the length of the heat portion of the cycle, the performance characteristics to be measured, special failure criteria, preventive maintenance to be allowed during the test, etc., shall be part of the test procedures to be submitted and approved by the activity responsible for the Qualified Products list prior to the beginning of the Qualification Test Phase of the Reliability Assurance Tests."

Page 11, paragraph 4.6.1.2, line 3: Delete

"Impedance Measurement 4.5.3.4."

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:29Z
Check the source to verify that this is the current version before use.

*Page 14, paragraph 6.2 Qualification, last sentence: Delete and substitute

"The activity responsible for the Qualified Products List is the U.S. Naval Ammunition Depot, Crane, Indiana 47422, and information pertaining to qualification of products may be obtained from that activity."

Page 14, paragraph 6.3: Add

"(4) Reordered Equipment - The following specifications shall take precedence over those concerning performance requirements listed or referenced in paragraph 2.1, where equipment is reordered.

MIL-E-5400F	1 June 1962
MIL-T-5422E	15 November 1961
MIL-I-6181D	25 November 1959
MIL-STD-781A	10 December 1965

Page 14, Add

"6.4 Ordering Data - The procurement document should specify the title, number and date of this specification and configuration in accordance with either Figure 1 or Figure 1A of this specification."


Page 19, delete "330 ohms" and substitute

"390 ohms"

Add Figures 1A, 12 and 13 of this amendment.

An asterisk preceding a paragraph number denotes a change to the specification which did not appear in the previous amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:29Z
Check the source to verify that this is the current version before use.

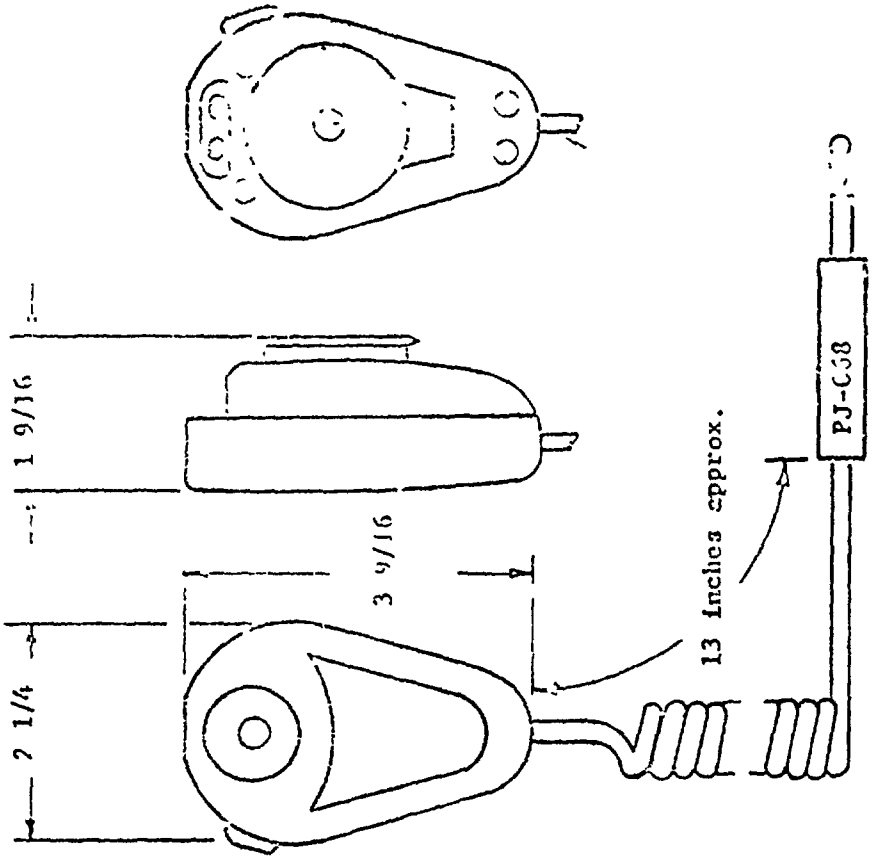

NOTE:
All dimensions are in inches, tolerances ± 1/64 unless otherwise noted.

FIGURE 1A Hand-held microphone M-92C/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:29Z
Check the source to verify that this is the current version before use.

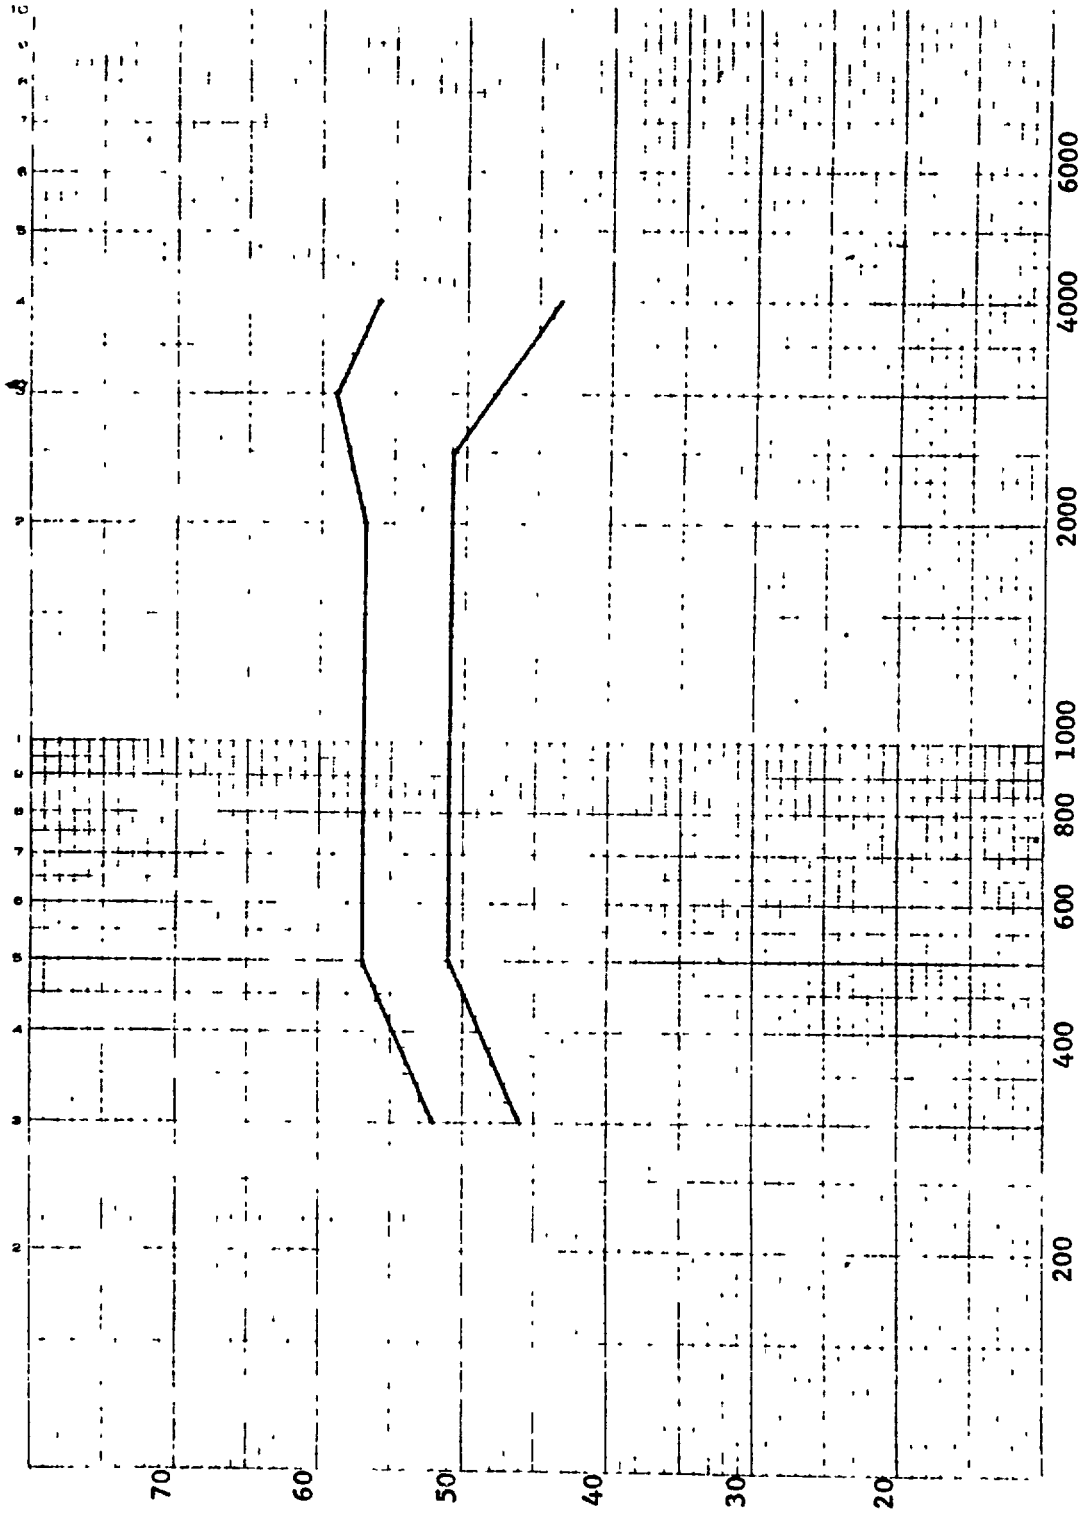


Figure 12. Frequency Response

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:29Z
Check the source to verify that this is the current version before use.

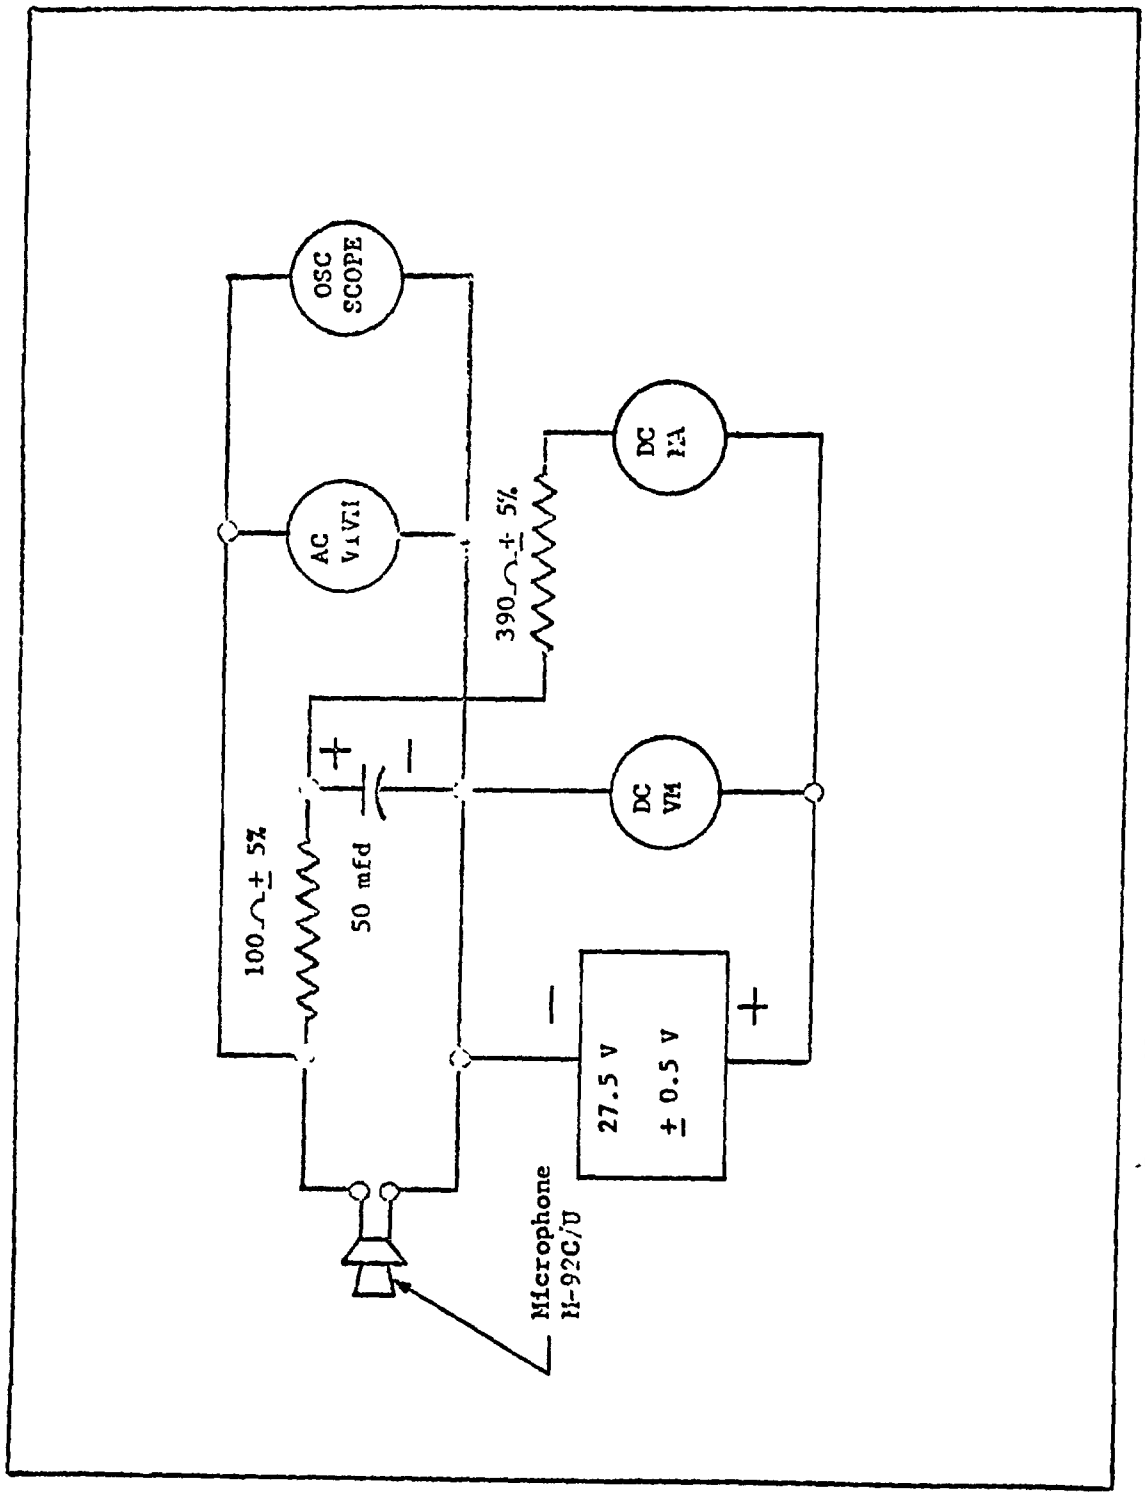


FIGURE 13 RADIATED RADIO FREQUENCY SUSCEPTIBILITY TEST CIRCUIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:29Z
Check the source to verify that this is the current version before use.