
MILITARY SPECIFICATION SHEET

HULL FITTING, STUFFING TUBE, TYPE MX2326/U (LONG BODY) FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the stuffing tube described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).

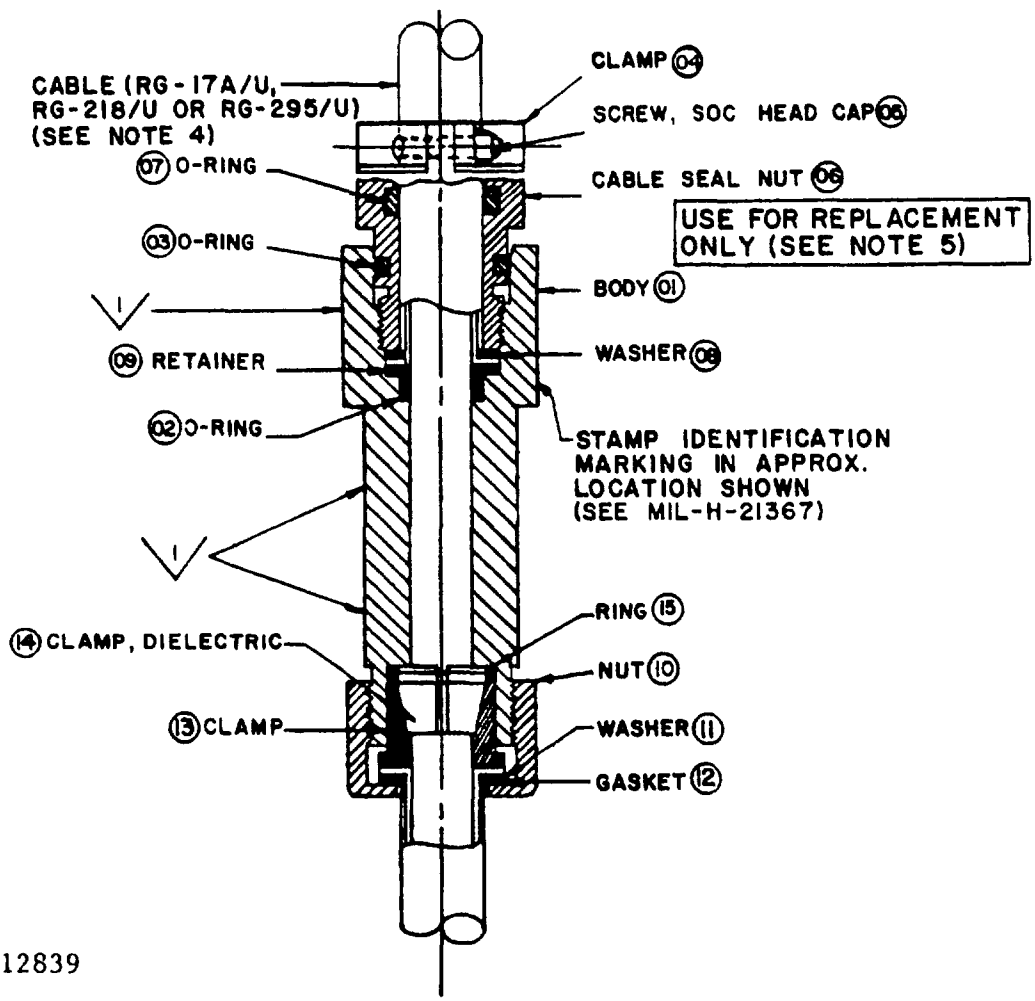

BRINELL HARDNESS READING SHALL BE TAKEN AT THESE POINTS

FIGURE 1. Assembly M21367/12-001 (MX2326/U)(long body).

FSC 5975

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:24Z
Check the source to verify that this is the current version before use.

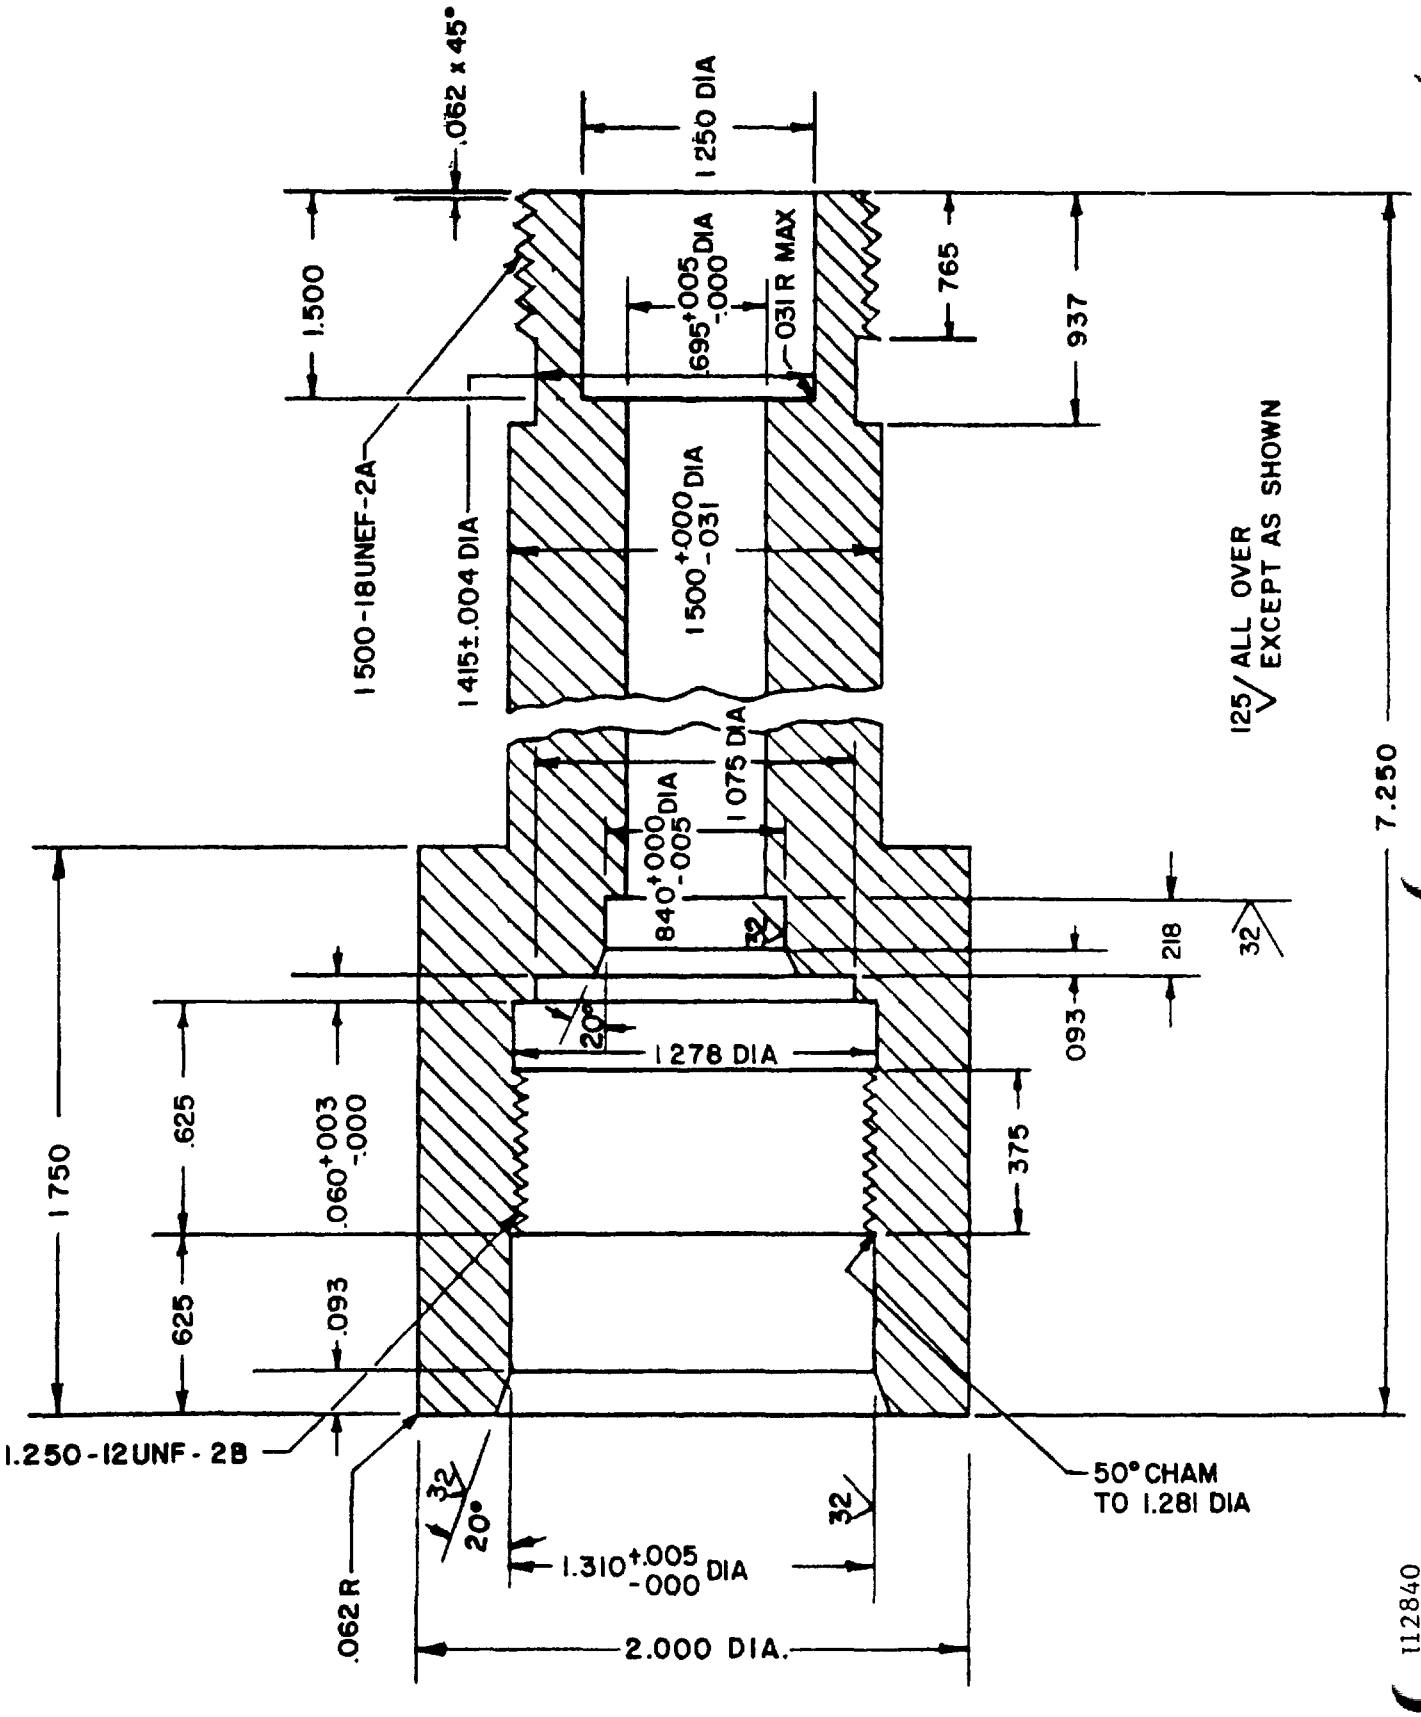


FIGURE 1. Body.

112840

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:24Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	NI-CU Alloy, QQ-N-281 CL A, Cold Drawn (Stress Relieved)	REC2687551-1
02	O-Ring		1	MS28775-115	
03	O-Ring		1	MS28775-215	
04	Clamp		1	MIL-H-21367/2, Fig. 4	
05	Socket Head Cap Screw 0.190-32, UNF-2A x 7/8 L		2	NI-CU Alloy, QQ-N-281 CL A	
06	Cable Seal Nut		1	MIL-H-21367/2, Fig. 5	
07	O-Ring		1	REA10083-14, MIL-P-25732	
08	Washer		1	MIL-H-21367/2, Fig. 6	
09	Retainer		1	MIL-H-21367/2, Fig. 7	
10	Nut		1	MIL-H-21367/2, Fig. 10	
11	Washer		1	MIL-H-21367/2, Fig. 13	
12	Gasket		1	MIL-H-21367/2, Fig. 12	
13	Clamp		1	MIL-H-21367/2, Fig. 9	
14	Dielectric Clamp		1	MIL-H-21367/2, Fig. 8	
15	Ring		1	MIL-H-21367/2, Fig. 11	

1/ Item numbers are the same as numbers shown in circles on figures.

NOTES:

1. Military part number M21367/12-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-17A/U cable conforms to MIL-C-23020/7, type RG-218/U conforms to MIL-C-17/79 and RG-295/U conforms to MIL-C-23020/5.
5. Type MX2326/U should be used for replacement purposes only. For new installations, use type MX8209 conforming to MIL-H-21367/2.

Preparing activity:
Navy - SH
(Project 5975-N578-12)

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:24Z
Check the source to verify that this is the current version before use.