MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, END SEAL TYPE MX1203/U, FOR FLEXIBLE, SOLID-DIELECTRIC RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the end seal described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


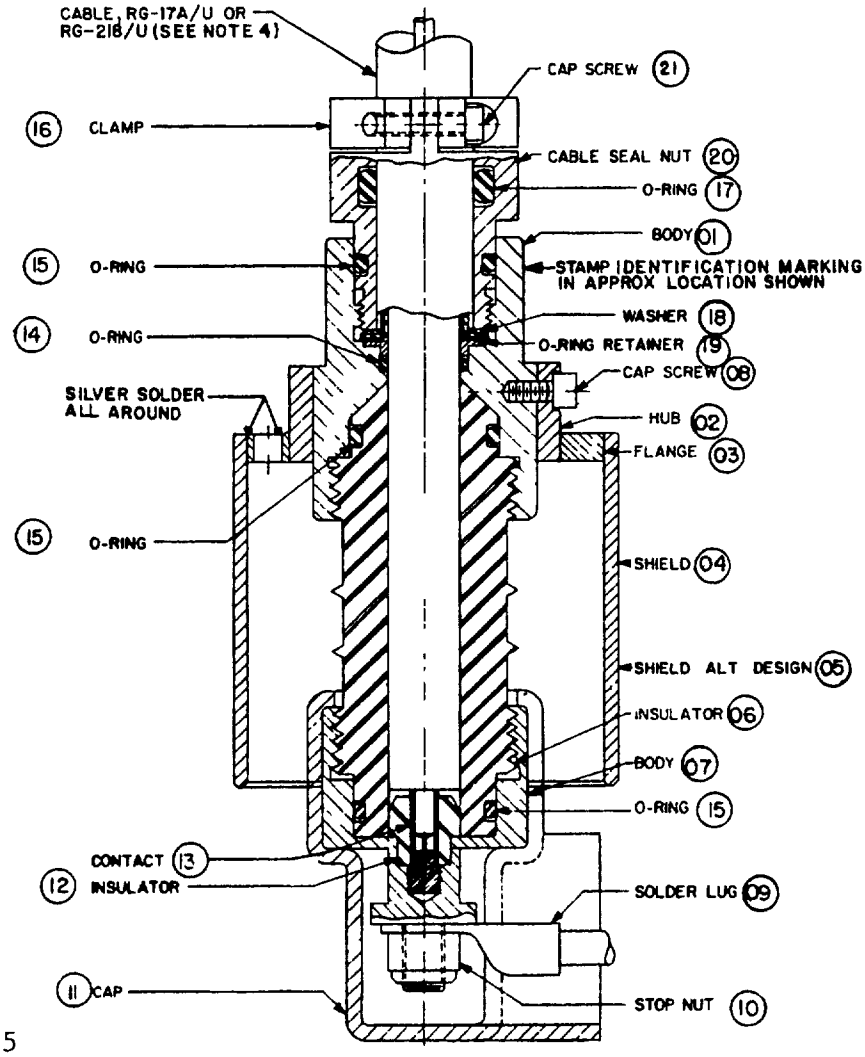


FIGURE 1. End seal assembly M21367/15-001 (MX1203/U).

FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

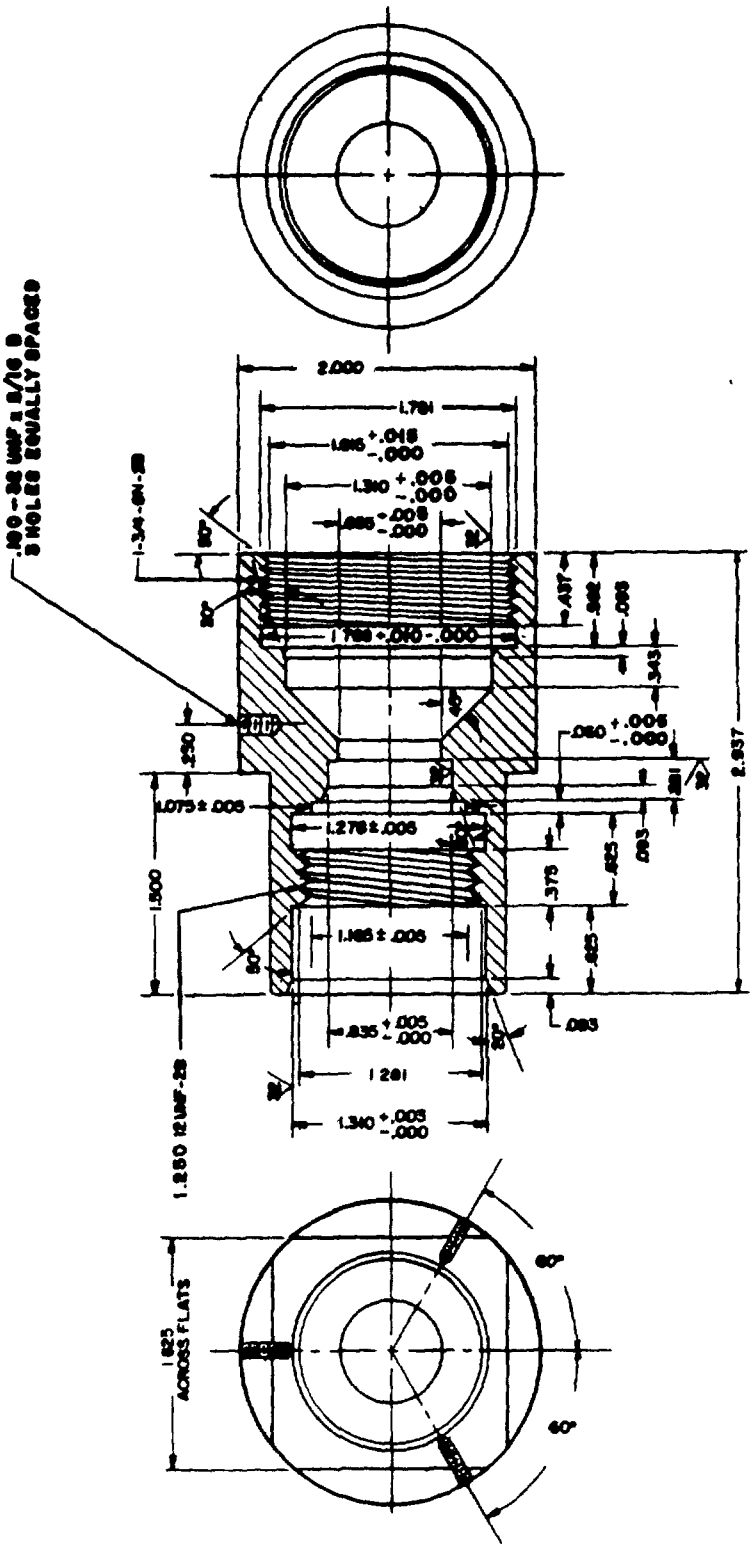

(01) FIGURE 2. Body.


SH12846


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

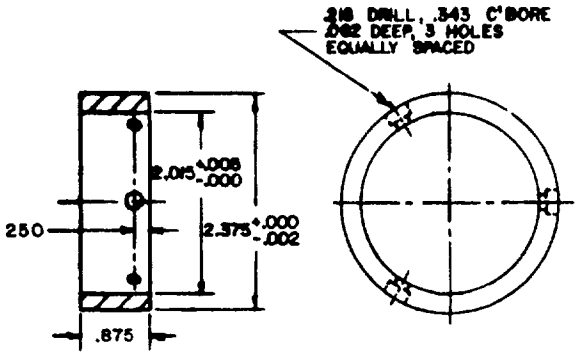

SH12847


02 FIGURE 3. Hub.

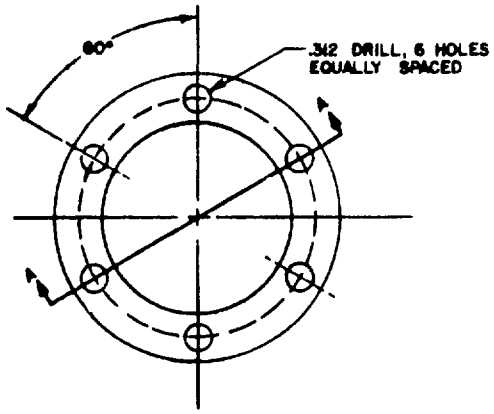


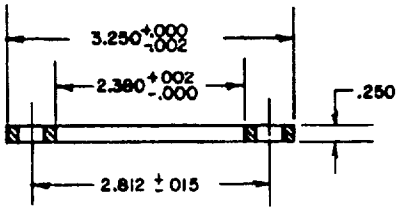

SH12848


03 FIGURE 4. Flange.

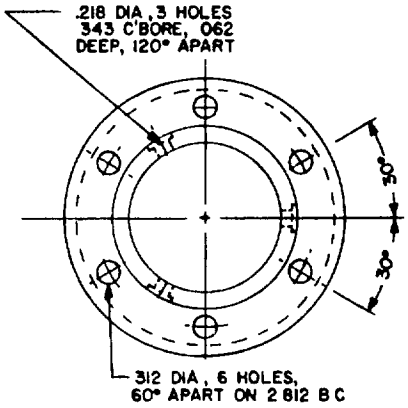

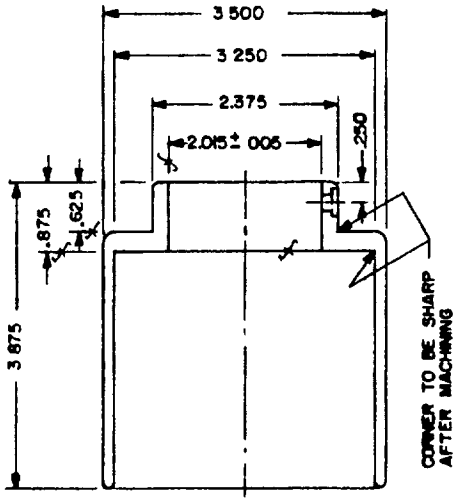

SH12849


05 FIGURE 5. Shield alternate design

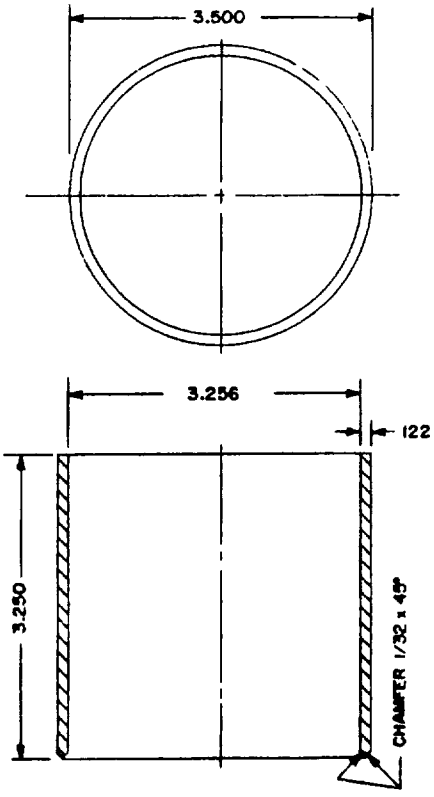

SH12850

04 FIGURE 6. Shield.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

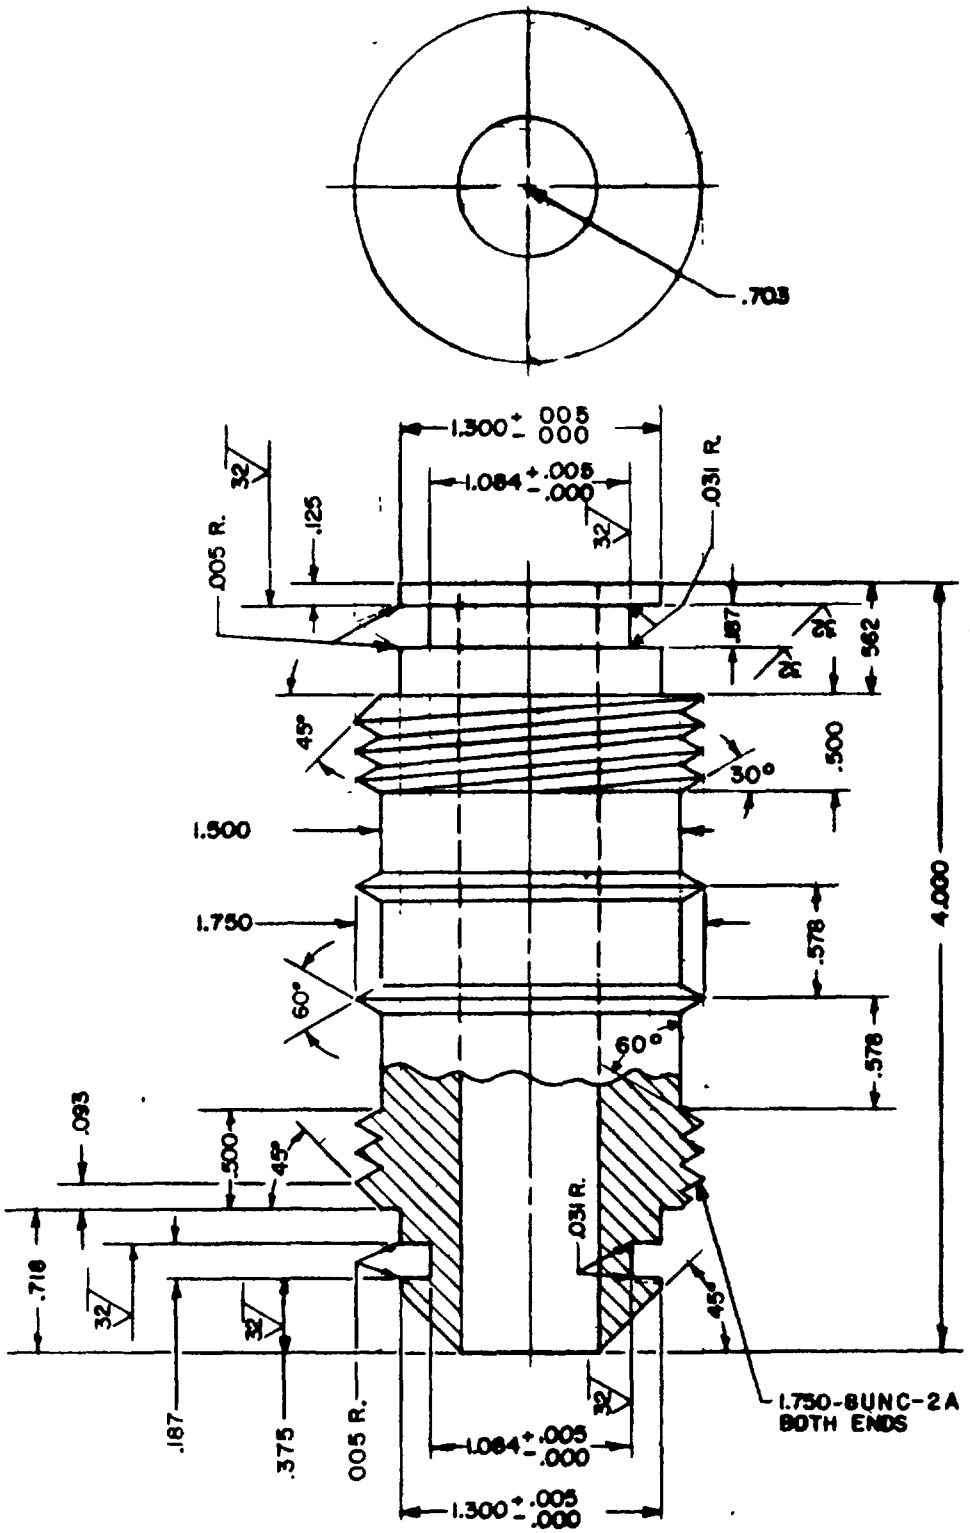

SH12851


06 FIGURE 7. Insulator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

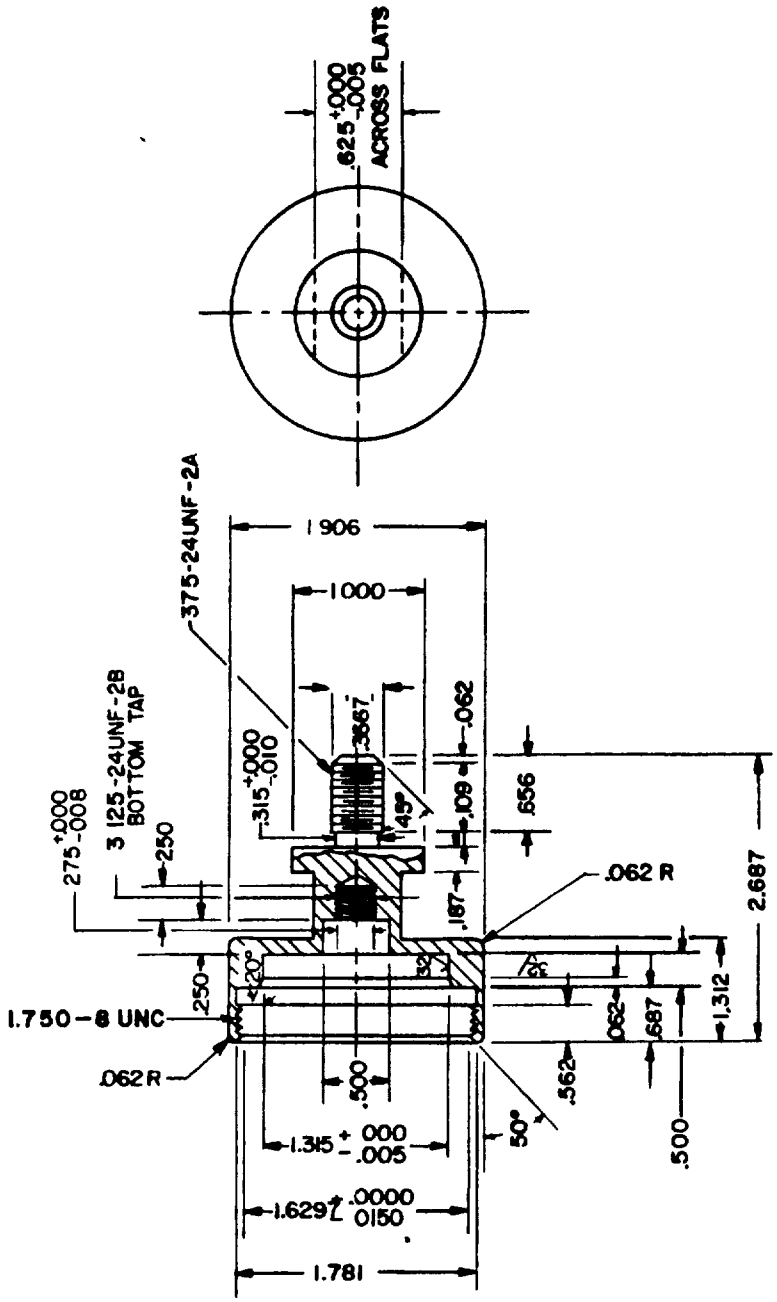

SH12852


07 FIGURE 8. Body.

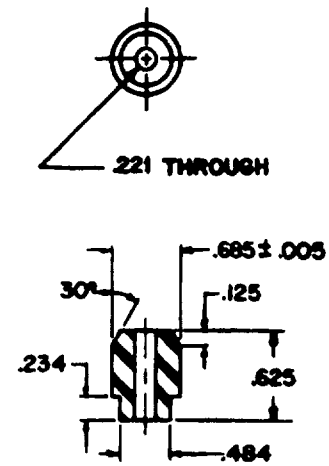

SH12853

12 FIGURE 9. Insulator


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

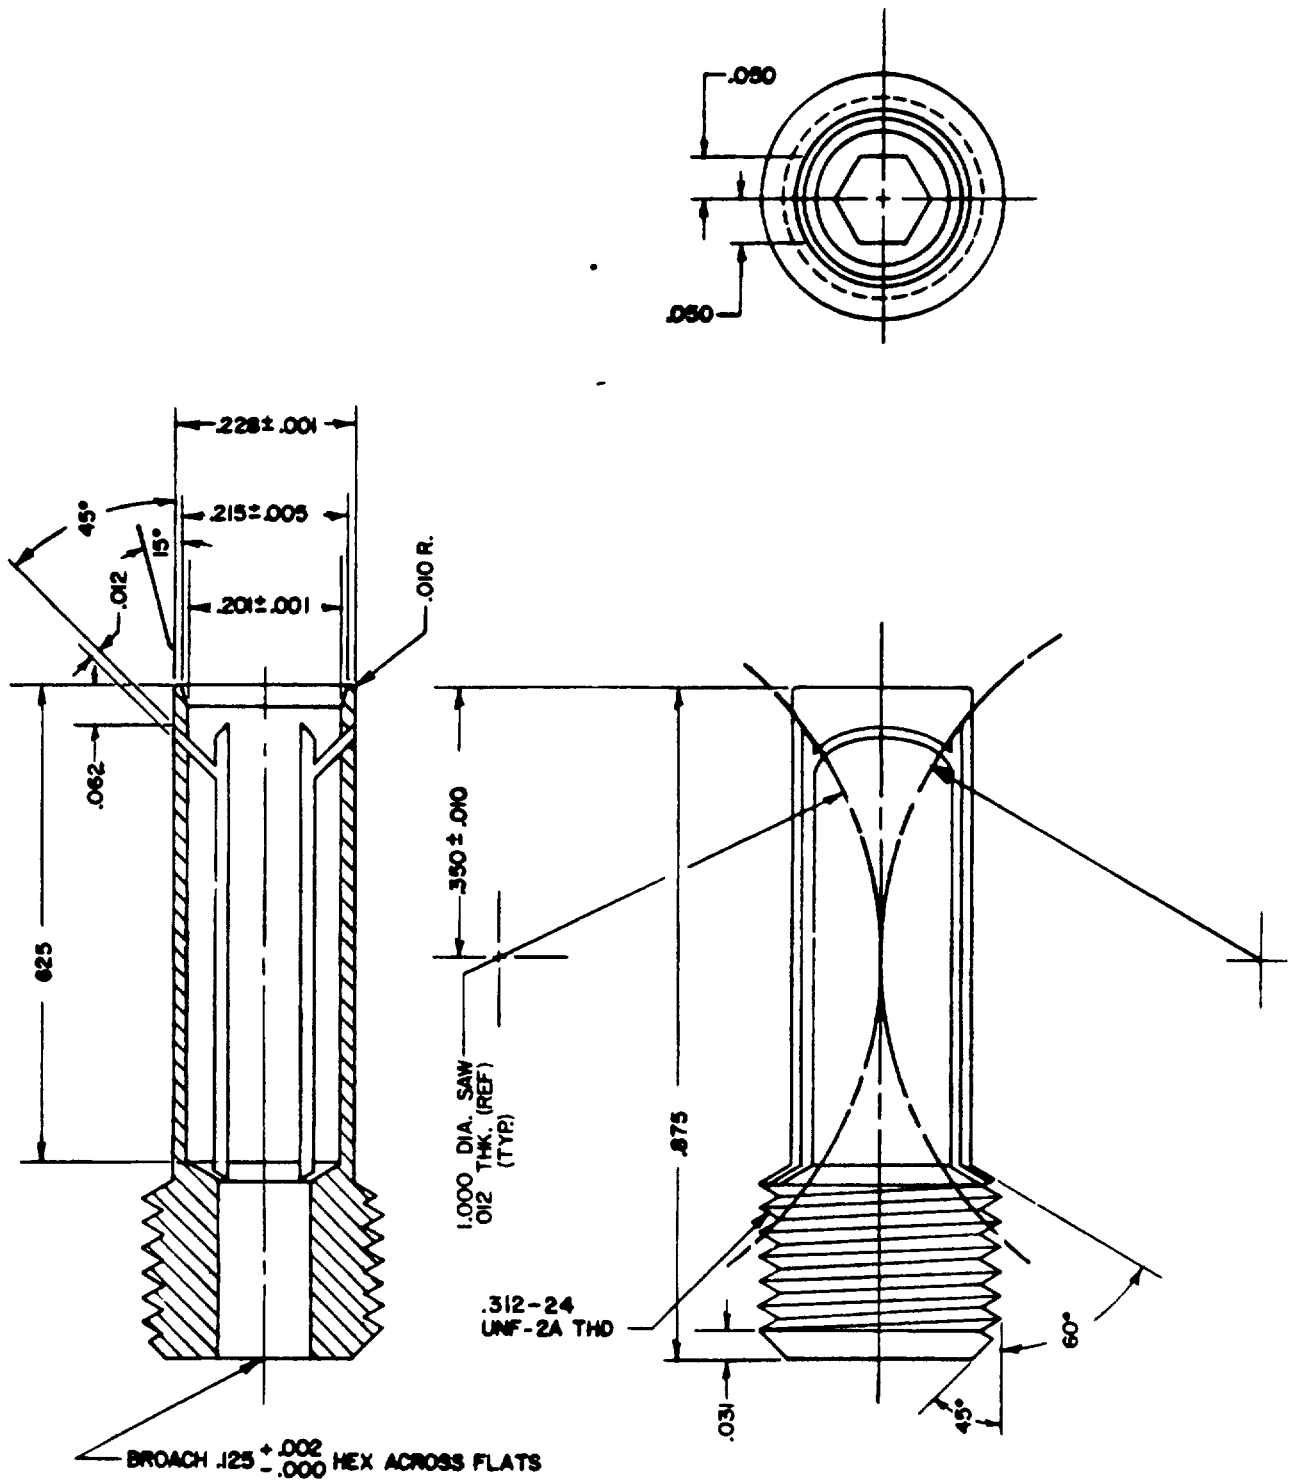

SH12854


13 FIGURE 10. Contact (see requirement 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

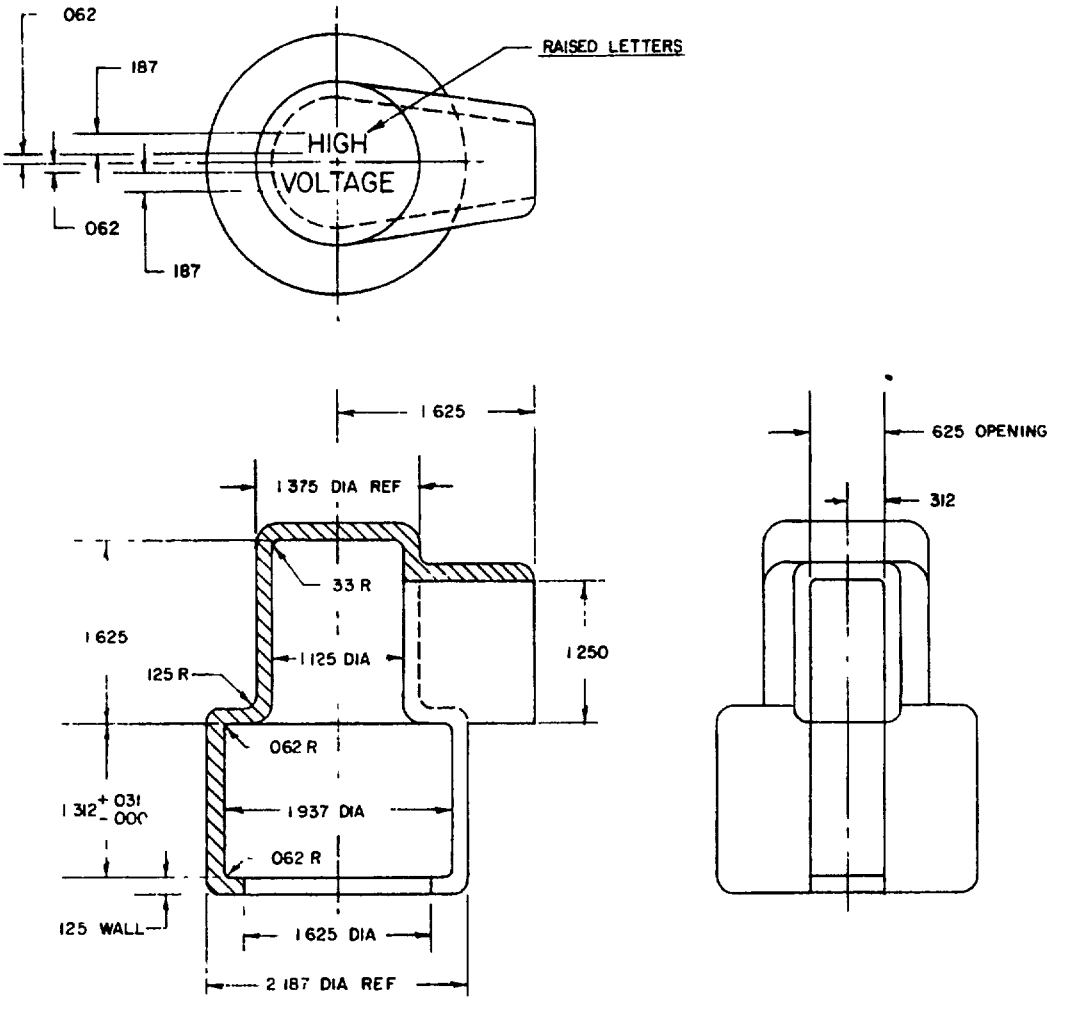


SH12855

(11) FIGURE 11. Cap.

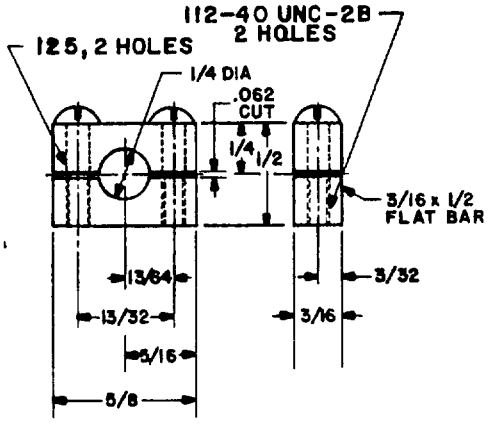

SH12856

FIGURE 12. Clamp.

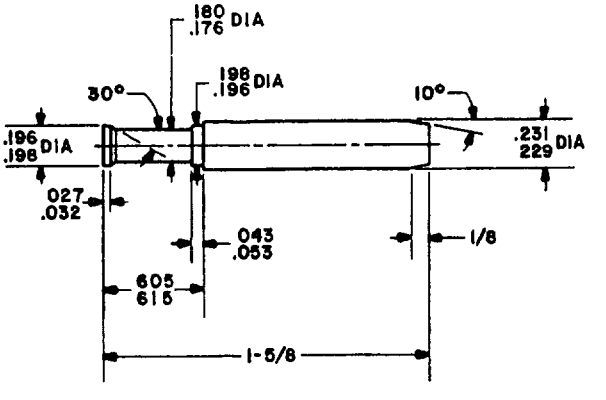

SH12857

FIGURE 13. Hardening pin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.[1/]	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	Manganese Bronze, QQ-B-728 CL A, 1/2 HD	REC101377-1
02	Hub	3	1	Brass, WW-P-351, Class	REB10329-2
03	Flange	4	1	Brass, Naval, QQ-B-637	REA10053-3
04	Shield	6	1	Brass, MIL-T-20168	REB10335-2
05	Shield, (Alt Design)	5	1	Manganese Bronze, QQ-C-390 Alloy #865	REB101608
06	Insulator	7	1	Teflon, Coml	REC101376-1
07	Body[2/]	8	1	Manganese Bronze, QQ-B-728 CL A, 1/2 HD	REC101378
08	Socket Head Cap Screw 0.190-32 UNF-2A x 5/16 L	-	3	NI-CU Alloy, QQ-N-281, CL A	-
09	Solder Lug	-	1	MS35446-4 (tin plated)	-
10	Stop Nut	-	1	#92NE-064[5/]	-
11	Cap	11	1	Polyethylene, L-P-390 Type I, Color Red	REB101799
12	Insulator[2/]	9	1	Polyethylene, MIL-D-3054 Type N	REA101448
13	Contact[2/3/]	10	1	Copper, Beryllium, QQ-C-530 HT	REB101379-1
14	O-Ring	-	1	MS28775-115	-
15	O-Ring	-	3	MS28775-215	-
16	Clamp	-	1	MIL-H-21367/2, Fig. 4	-
17	O-Ring	-	1	REA10083-15	-
18	Washer	-	1	MIL-H-21367/2, Fig. 6	-
19	Retainer, O-Ring	-	1	MIL-H-21367/2, Fig. 7	-
20	Nut, Cable Seal	-	1	MIL-H-21367/12, Fig. 5	-
21	Socket Head Cap Screw 0.190-32 UNF-2A x 1 L	-	2	NI-CU-Alloy, QQ-N-281, CL A	-
22	Clamp[4/]	12	1	Steel ASTM A 366	REA 101676
23	Pin, Hardening[4/]	13	1	CRES, QQ-S-763, Class 304, A	REB 101675

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Body, contact, and insulator shall be furnished completely assembled.
3/ Silver plated.
4/ These parts are used in the manufacturing and assembly of the contact (item 13) and shall not be furnished as a part of the end seal (see requirement 1).
5/ ESNA Company catalog, or equivalent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Gauge test required.
2. Hardening pin (item 23) shall be inserted in contact (item 13) and free ends of spring fingers shall be clamped against pin with clamp (item 22) and then the contact shall be heat treated.

NOTES:

1. Military part number M21367/15-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions, plus or minus 0.005 for decimals and plus or minus 1/2 degree for angular dimensions.
4. Type RG-17A/U cable conforms to MIL-C-23020/7 and type RG-218/U conforms to MIL-C-17/79.

Preparing activity:
Navy - SH
(Project 5935-N196-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.