
MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, END SEAL TYPE MX2632/U FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the end seal described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).

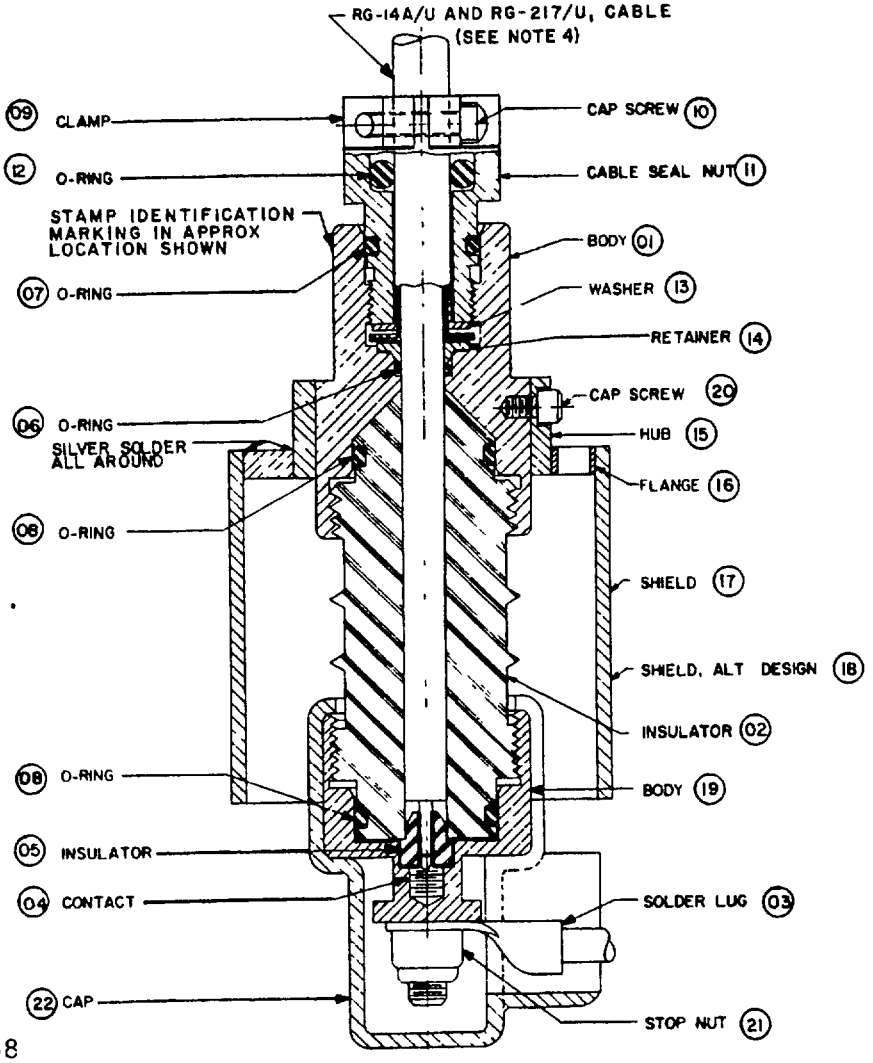


SH12858

FIGURE 1. End seal assembly M21367/30-001 (MX2632/U).

FSC 5935


DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

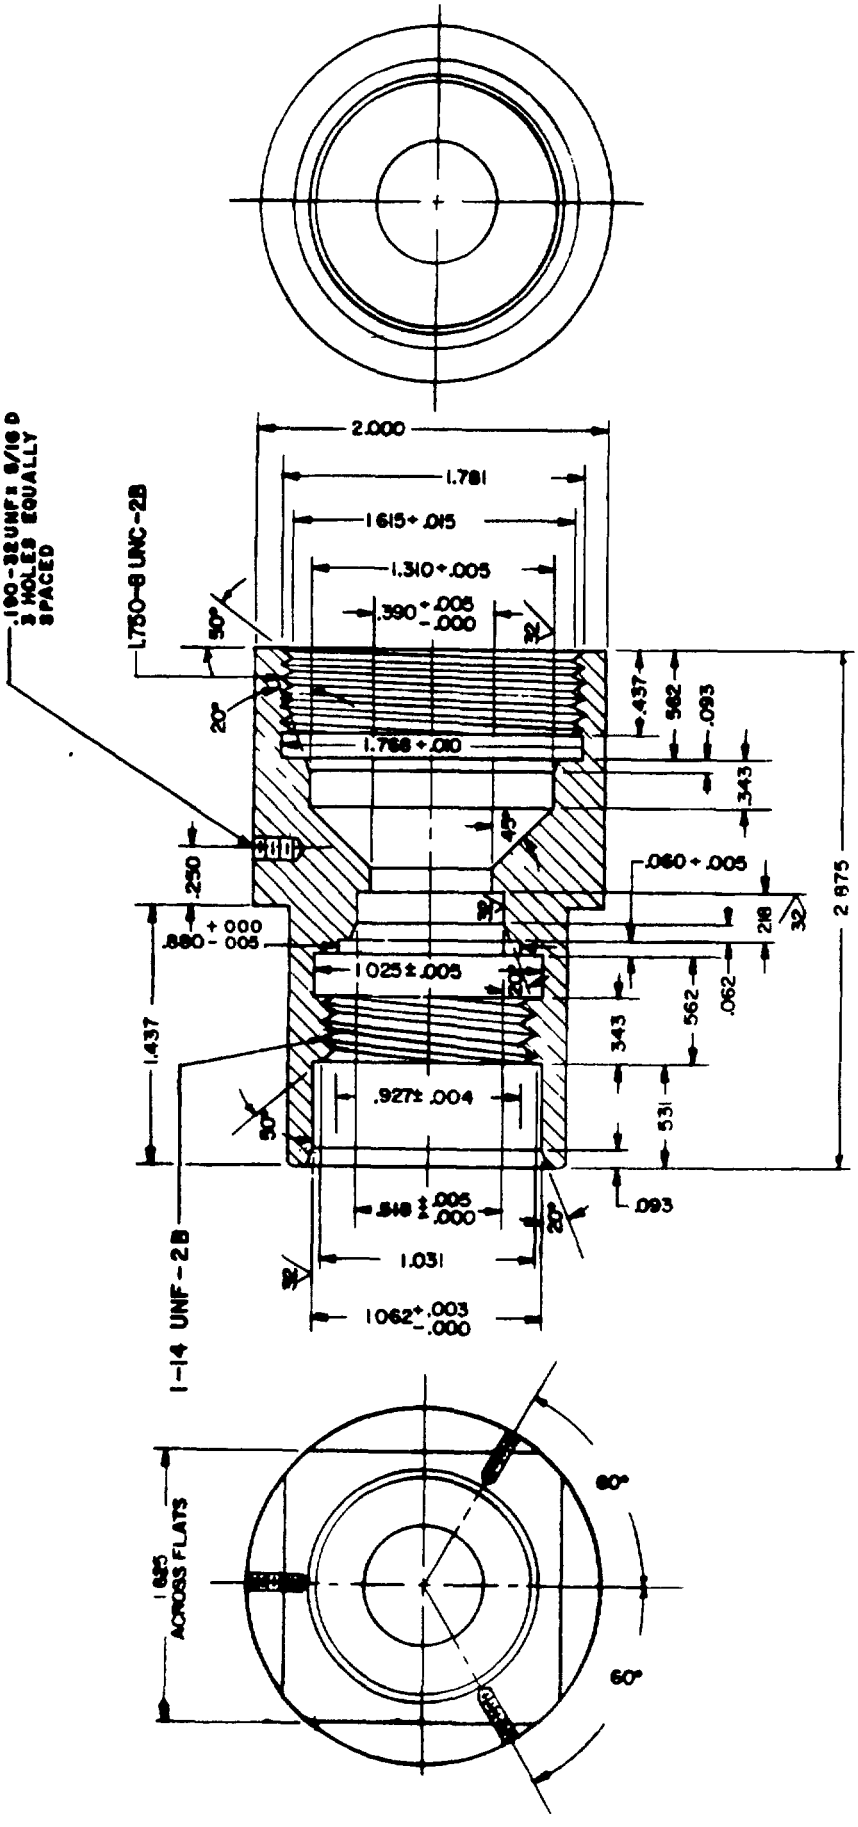

(01) FIGURE 2. Body.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

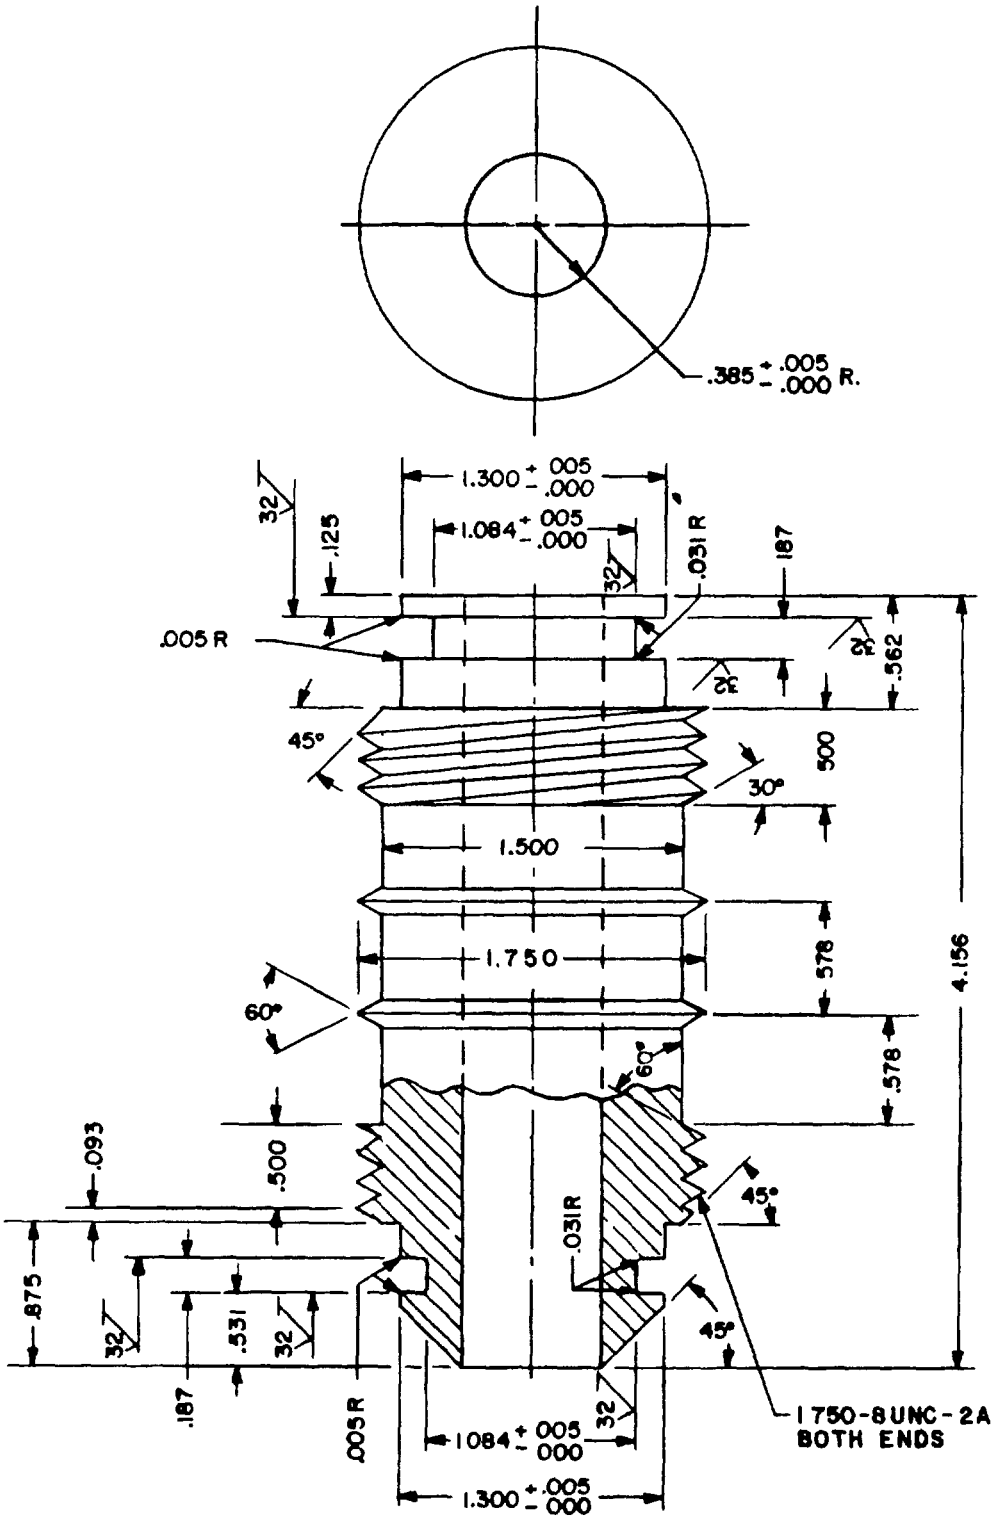

SH12860

02 FIGURE 3. Insulator.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

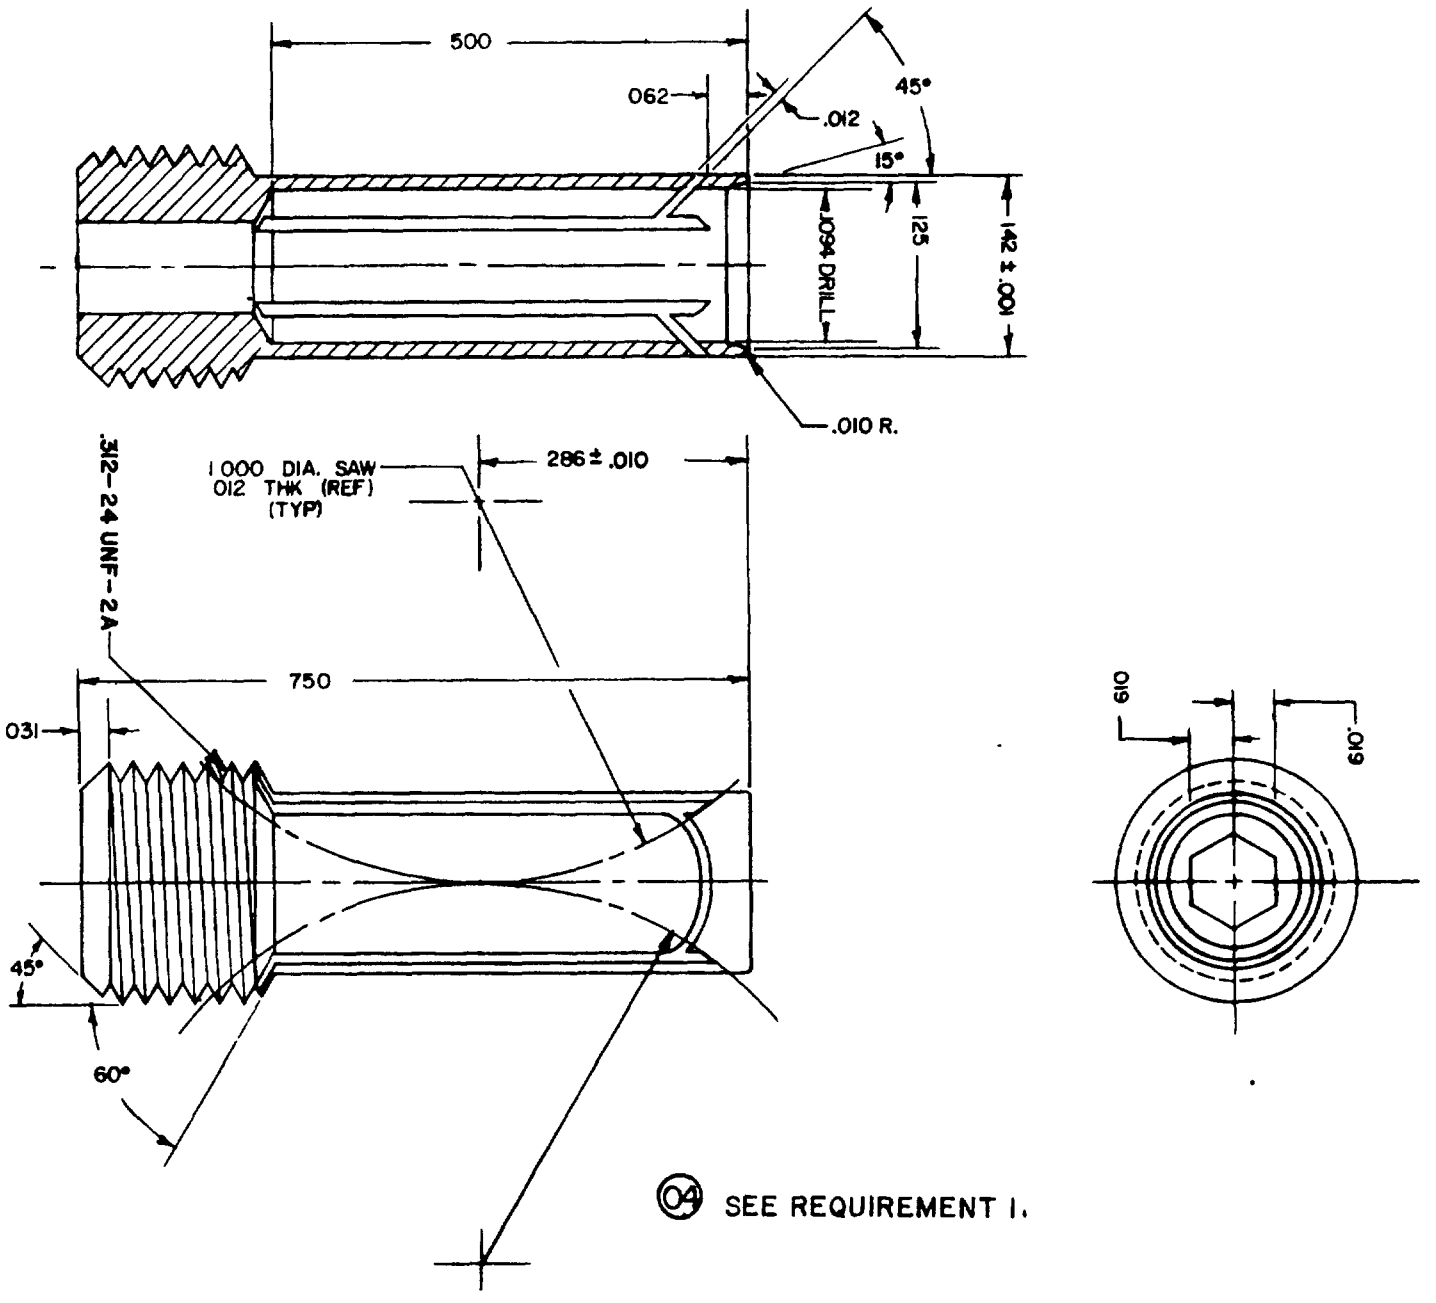

SH12861


FIGURE 4. Contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

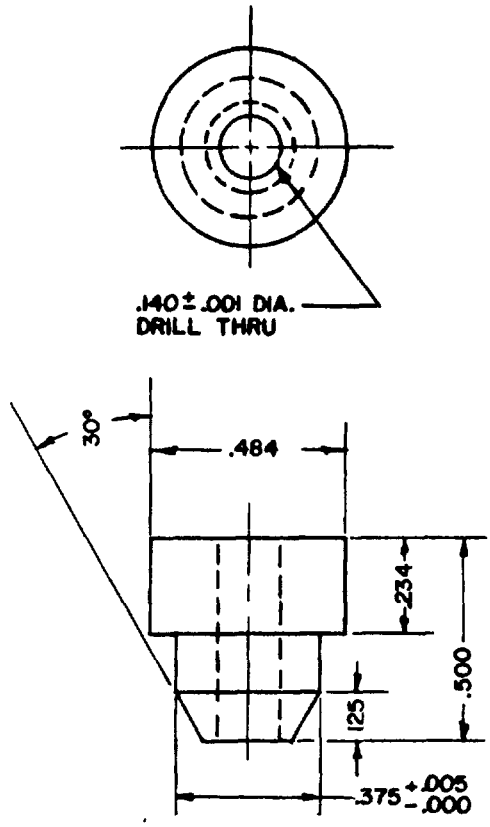


SH12862

05 FIGURE 5. Insulator.

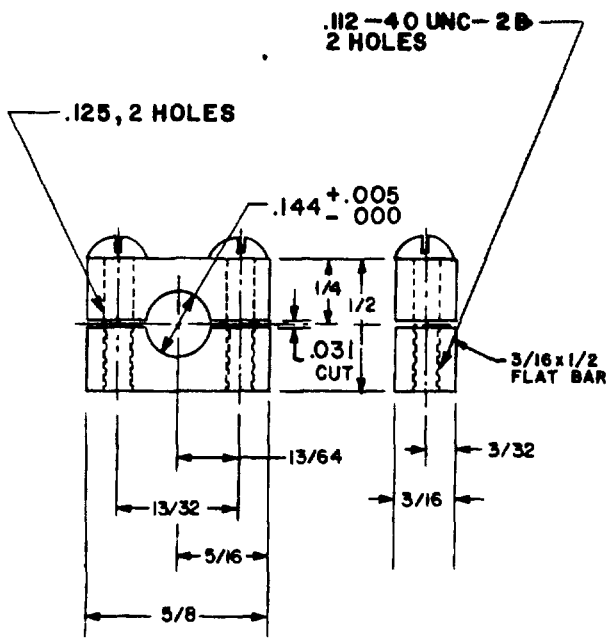

SH12863

23 FIGURE 6. Clamp.

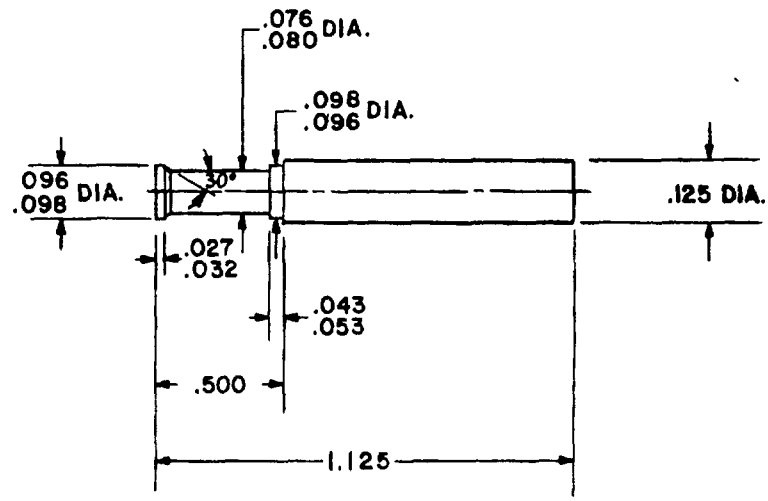

SH12864

24 FIGURE 7. Pin, hardening.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	Manganese Bronze, QQ-B-728 CL A, 1/2 HD	REC101377-2
02	Insulator	3	1	Teflon, Coml	REC101376-2
03	Solder Lug	-	1	MS35446-6 (tin plated)	-
04	Contact2/3/	4	1	Copper, Beryllium, QQ-C-530, HT	REB101379-2
05	Insulator3/	5	1	Polyethylene, MIL-P-21922	REA101610
06	O-Ring	-	1	MS28775-110	-
07	O-Ring	-	1	MS28775-211	-
08	O-Ring	-	2	MS28775-215	-
09	Clamp	-	1	MIL-H-21367/1, Fig. 4	-
10	Socket Head Cap Screw 0.190-32 UNF-2A x 3/4 L	-	1	NI-CU Alloy, QQ-N-281 CL A	-
11	Cable Seal Nut	-	1	MIL-H-21367/1, Fig. 4	-
12	O-Ring	-	1	REA10083-16	-
13	Washer	-	1	MIL-H-21367/1, Fig. 6	-
14	Retainer	-	1	MIL-H-21367/1, Fig. 12	-
15	Hub	-	1	MIL-H-21367/15, Fig. 3	-
16	Flange	-	1	MIL-H-21367/15, Fig. 4	-
17	Shield	-	1	MIL-H-21367/15, Fig. 6	-
18	Shield (Alt Design)	-	1	MIL-H-21367/15, Fig. 5	-
19	Body3/	-	1	MIL-H-21367/15, Fig. 8	-
20	Socket Head Cap Screw 0.190-32 UNF-2A x 5/16 L	-	3	NI-CU Alloy, QQ-N-281, CL A 5/	-
21	Stop Nut	-	1	#92-NE-064	-
22	Cap	-	1	MIL-H-21367/15, Fig. 11	-
23	Clamp4/	6	1	Steel, Hot Rolled, ASTM 366	REB101613-1
24	Pin, Hardening4/	7	1	CRES, QQ-S-763, Class 304, A	REC101612-1

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Silver plated.
3/ Body, contact, and insulator shall be furnished completely assembled.
4/ These parts are used in the manufacturing and assembly of the contact (item 04) and shall not be furnished as a part of the end seal (see requirement 1).
5/ ESNA Company catalog, or equivalent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Gauge test required.
2. Hardening pin (item 24) shall be inserted in contact (item 04) and free ends of spring fingers shall be clamped against pin with clamp (item 23) then heat treated in accordance with QQ-C-530. Remove pin and clamp after heat treatment.

NOTES:

1. Military part number M21367/16-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions, plus or minus 0.005 for decimals, and plus or minus 1/2 degree for angular dimensions.
4. Type RG-14A/U cable conforms to MIL-C-23020/6 and type RG-217/U conforms to MIL-C-17/78.

Preparing activity:
Navy - SH
(Project 5935-N196-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.