MILITARY SPECIFICATION SHEET

HULL FITTING, BLANKING PLUGS FOR STUFFING TUBES MX2326/U, MS2327/U, AND MX2646/U, FOR FLEXIBLE SOLID-DIELECTRIC RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the blanking plugs described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


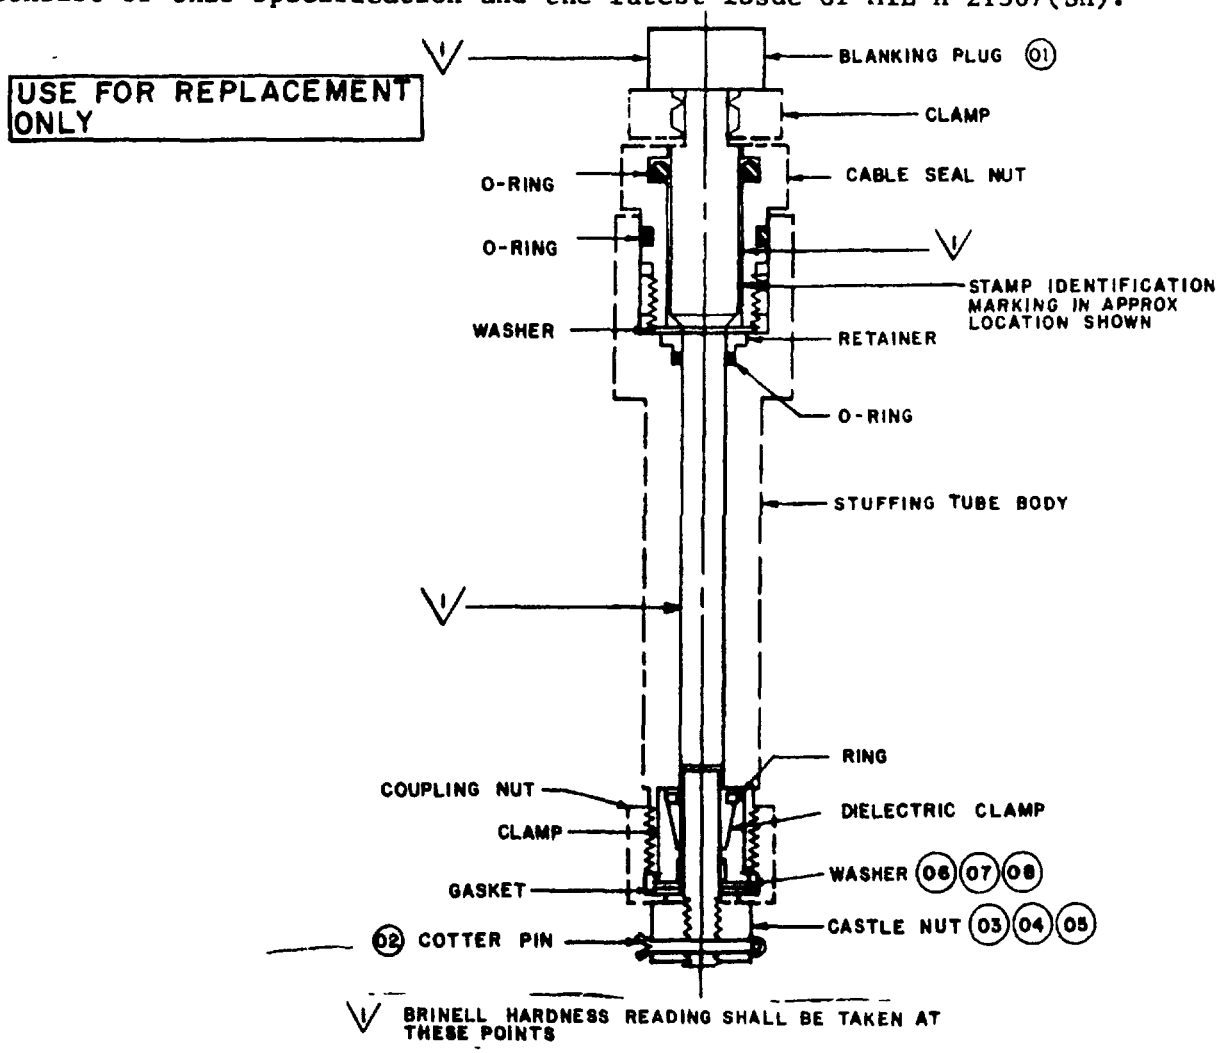


FIGURE 1. Blanking plugs for stuffing tubes MX2326, MX2327, and MX2646.

FSC 5975

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

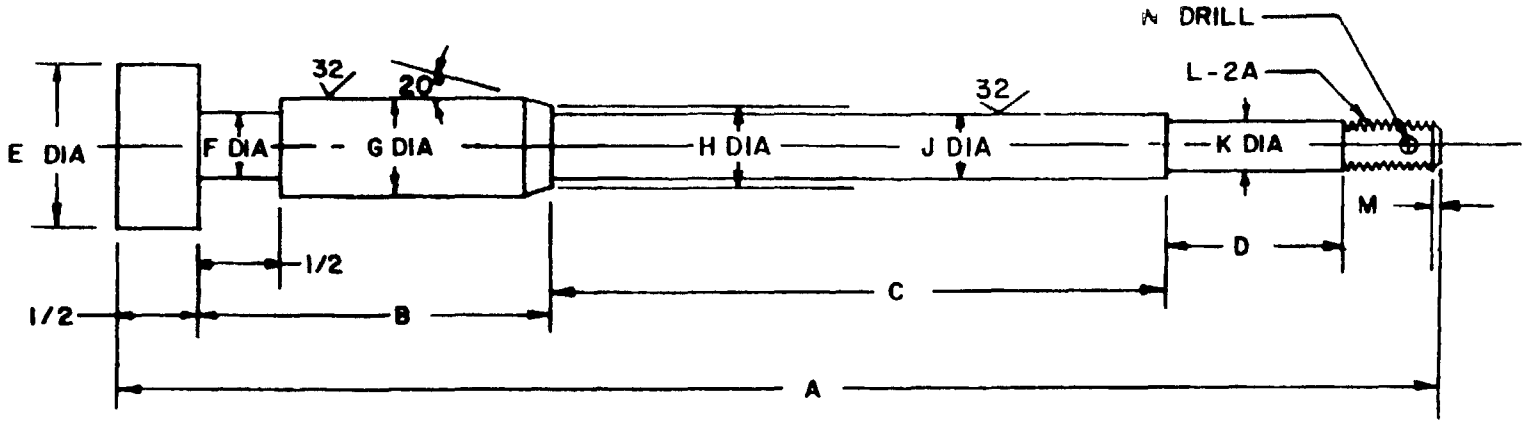

SH12866

125 ALL OVER
EXCEPT AS SHOWN

(01) FIGURE 2. Body.

TABLE I. Dimensions.

MILITARY PART NO. M21367/17-	USED WITH		A	B	C	D	E	F	G	H	J	K	L	M	N
	NOMENCLATURE	MIL-H-21367/													
001	MX2327/U	9	8	2 125	3-3/4	1	5/8	0417	0545	0 460	0 375	0 313	0 3125-24 UNF	5/32	3/32
002	MX2327/U (LB)	10	9	2 125	4-3/4	1	5/8	417	545	460	375	313	3125-24UNF	5/32	3/32
003	MX2326/U	11	9-1/8	2 437	3-3/8	2	1	730	870	740	685	500	500-20UNF	3/16	1/8
004	MX2326/U(LB)	12	10-1/8	2.437	4-3/8	2	1	730	870	.740	685	500	500-20UNF	3/16	1/8
005	MX2646/U	13	7-15/16	2 125	3-3/4	1	3/4	525	625	490	477	375	375-24UNF	1/8	1/8
006	MX2646/U(LB)	14	8-15/16	2 125	4-3/4	1	3/4	525	625	490	477	375	.375-24 UNF	1/8	1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

TABLE II. Standard parts.

Item no.1/	Description	Qty	Material/spec	Formerly covered on Drawing
01	Body	1	NI-CU-AL AL, QQ-N-286, CL A, AH	NUSL 44533
02	Cotter Pin, Size AR	1	NI-CU Alloy, QQ-N-281 CL A	
03	Castle Nut2/	1	NI-CU-AL AL, QQ-N-286 CL A, AH, AN121552	
04	Castle Nut3/	1	AN121556 NI-CU-AL AL, QQ-N-286, CL A, AH	
05	Castle Nut4/	1	AN121554 NI-CU-AL AL, QQ-N-286, CL A, AH	
06	Washer, 11/32 id, 1.15 od, 0.200 THK2/	1	NI-CU Alloy, QQ-N-281 CL A	
07	Washer, 17/32 id, 1.15 od, 0.185 THK3/	1	NI-CU Alloy, QQ-N-281 CL A	
08	Washer, 13/32 id, 1.15 od, 0.140 THK4/	1	NI-CU Alloy, QQ-N-281 CL A	

1/ Item numbers are the same as numbers shown in circles on figures. All other items listed on figure 1 are part of the stuffing tube which is being blanked.
2/ For M21367/17 -001 and -002.
3/ For M21367/17 -003 and -004.
4/ For M21367/17 -005 and -006.

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.

Preparing activity:
Navy - SH
(Project 5975-N578-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.