MILITARY SPECIFICATION SHEET

HULL FITTING, BLANKING PLUGS FOR STUFFING TUBE MX7637/U FOR FLEXIBLE, SOLID-DIELECTRIC RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the blanking plugs described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).

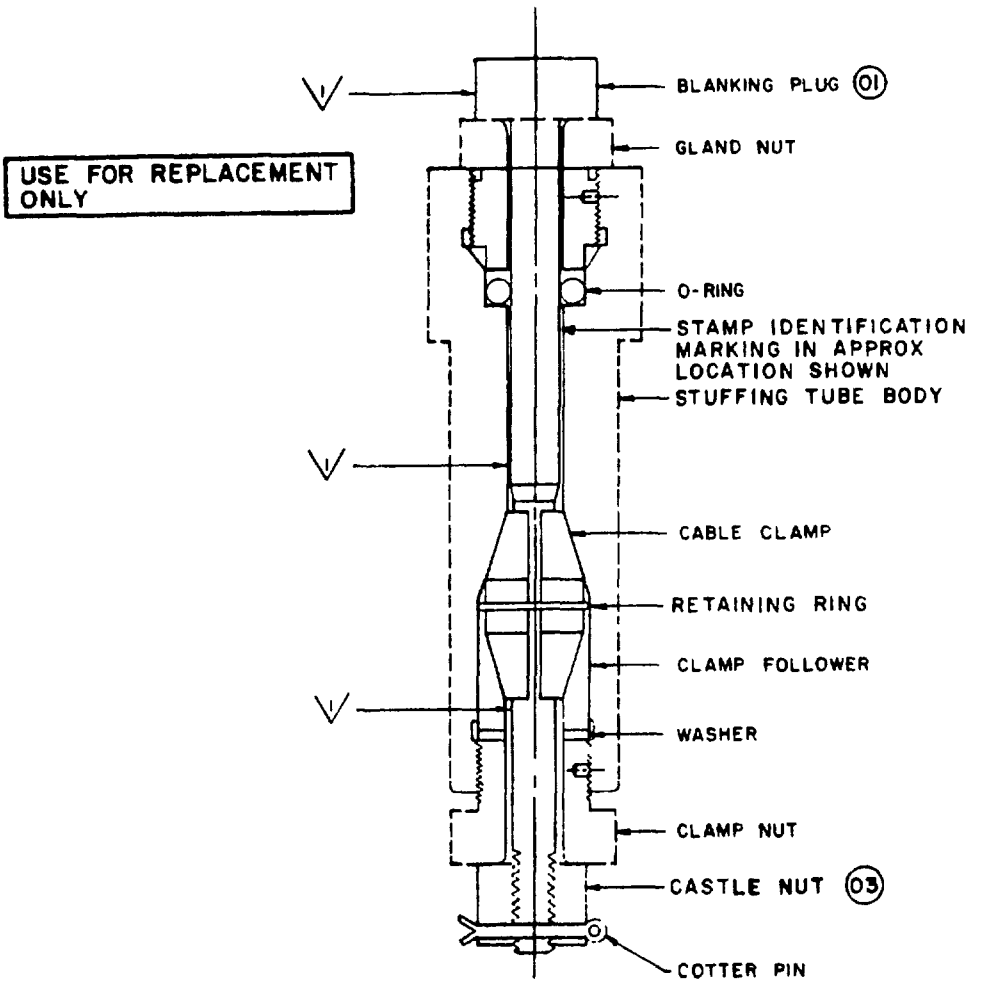


FIGURE 1. Blanking plugs for stuffing tube MX7637/U.

FSC 5975

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

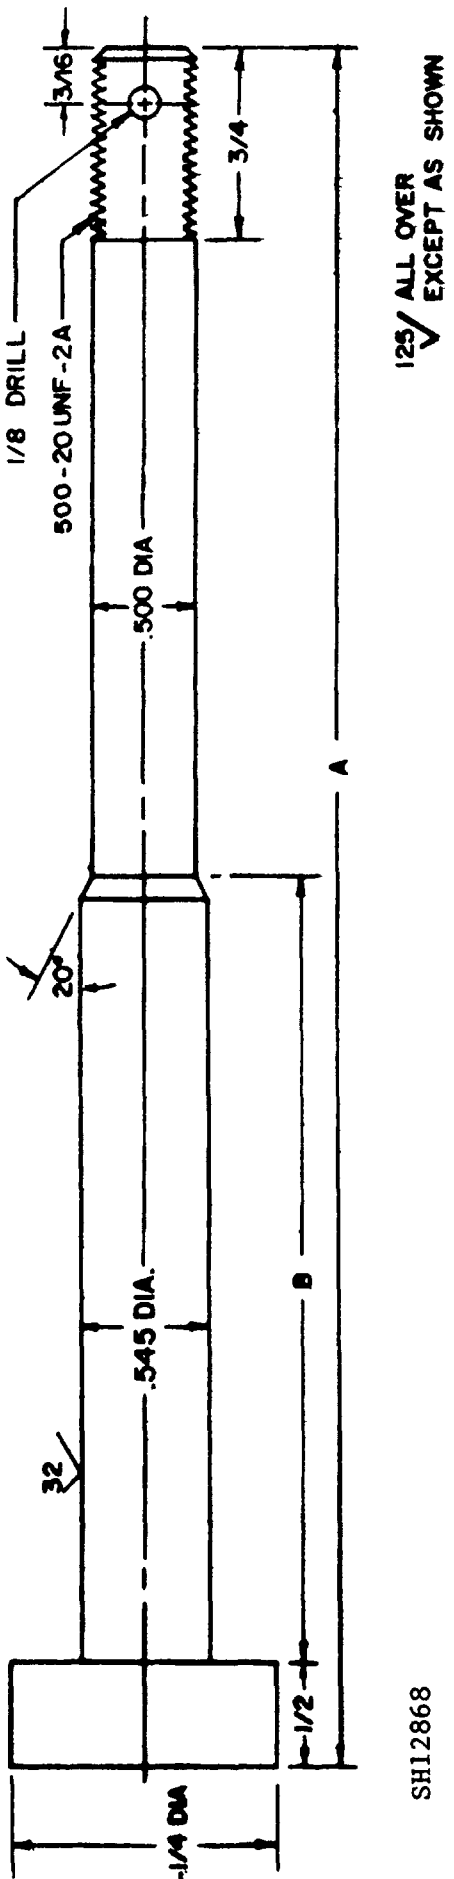


FIGURE 2. Body.

TABLE I. Dimensions.

MILITARY PART NUMBER	USED WITH MIL-H-21367/	A	B
M21367/18-001	7	8-3/16	3-3/4
M21367/18-002	8	9-3/16	4-3/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

TABLE II. Standard parts.

Item no. 1/	Description	Qty	Material/spec	Formerly covered on Drawing
01	Body	1	NI-CU-AL AL, QQ-N-286, CL A, AH	
02	Cotter Pin, Size AR	1	NI-CU Alloy, QQ-N-281, CL A	
03	Castle Nut	1	NI-CU-AL AL, QQ-N-286, CL A, AH, AN121556	

1/ Item numbers are the same as numbers shown in circles on figures. All other items shown on figure 1 are part of the stuffing tube being blanked.

NOTES:
1. All dimensions in inches.
2. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.

Preparing activity:
Navy - SH
(Project 5975-N578-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.