MIL-H-21367/19(SH)
18 October 1985
SUPERSEDING
REC 49412F
13 December 1963

MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, ADAPTER, TYPE UG1404/U, FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the adapter described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


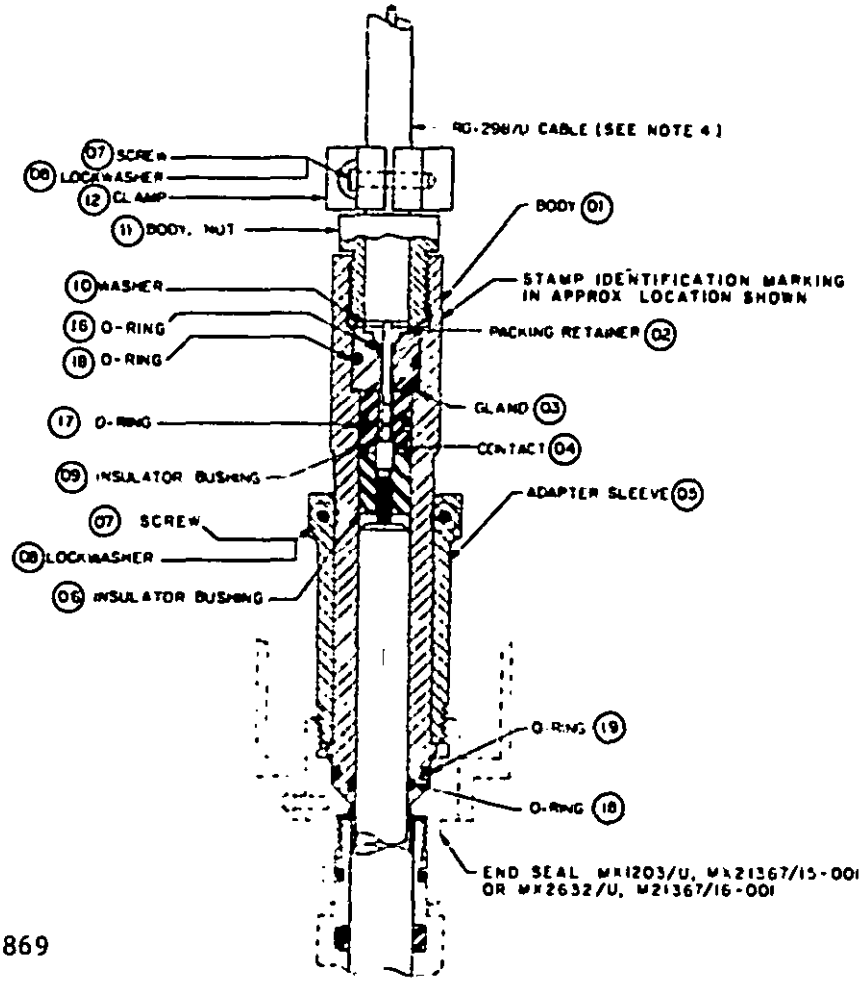


FIGURE 1. Adapter, connector assembly M21367/19-001 (UG1404/U).

FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

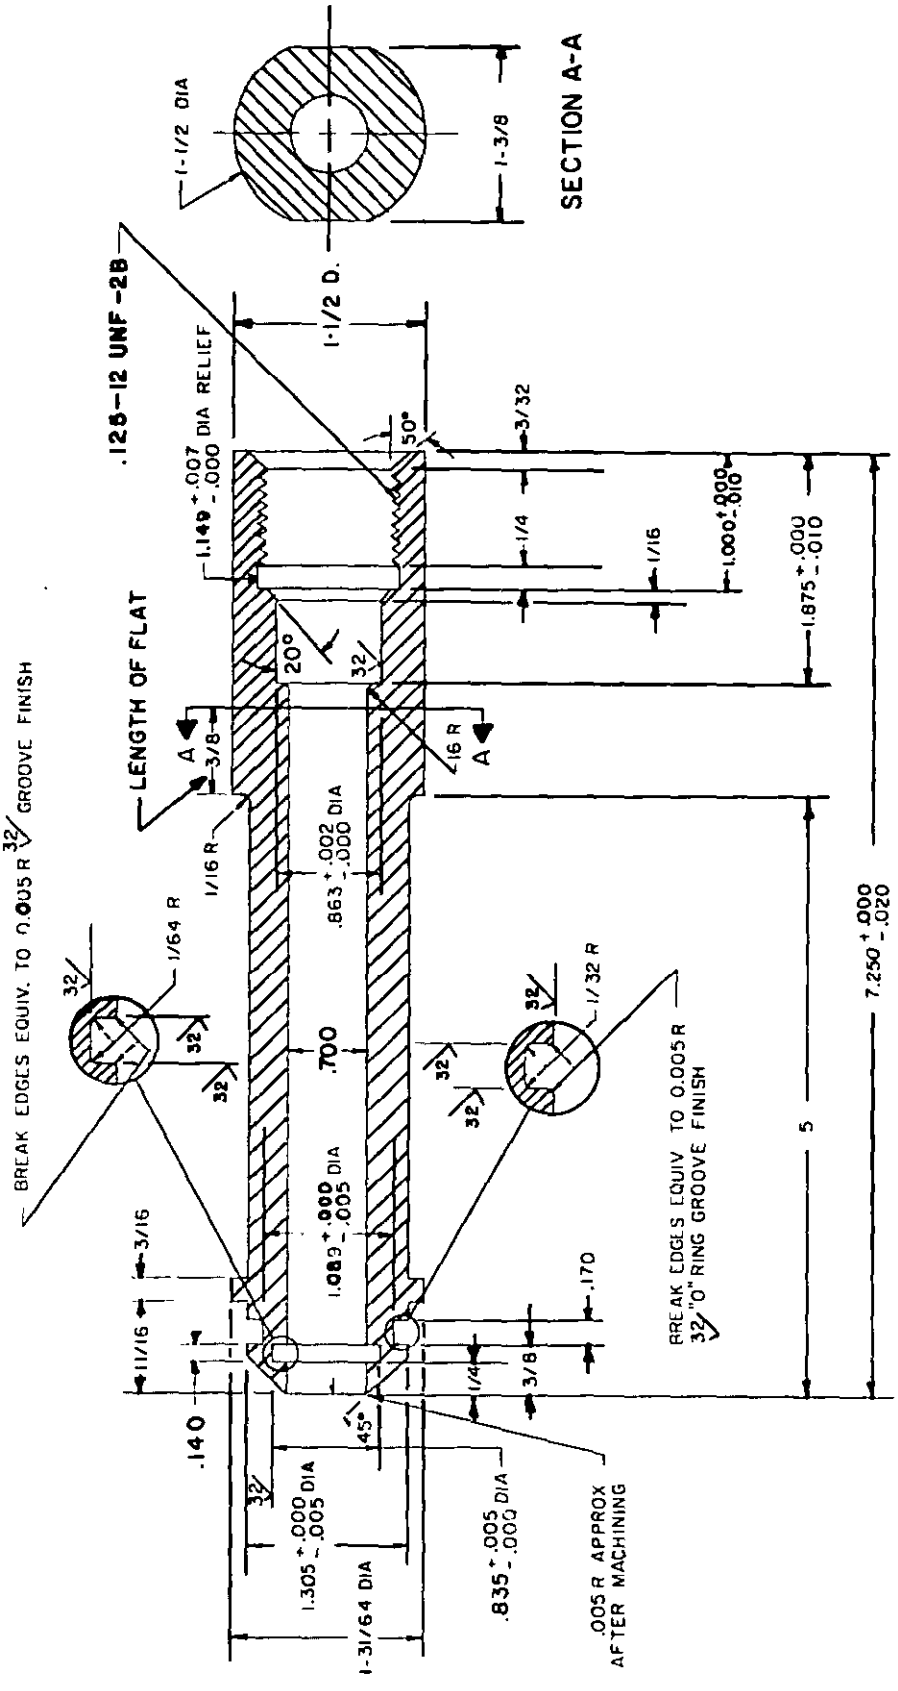

SH12870


(01) FIGURE 2. Body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

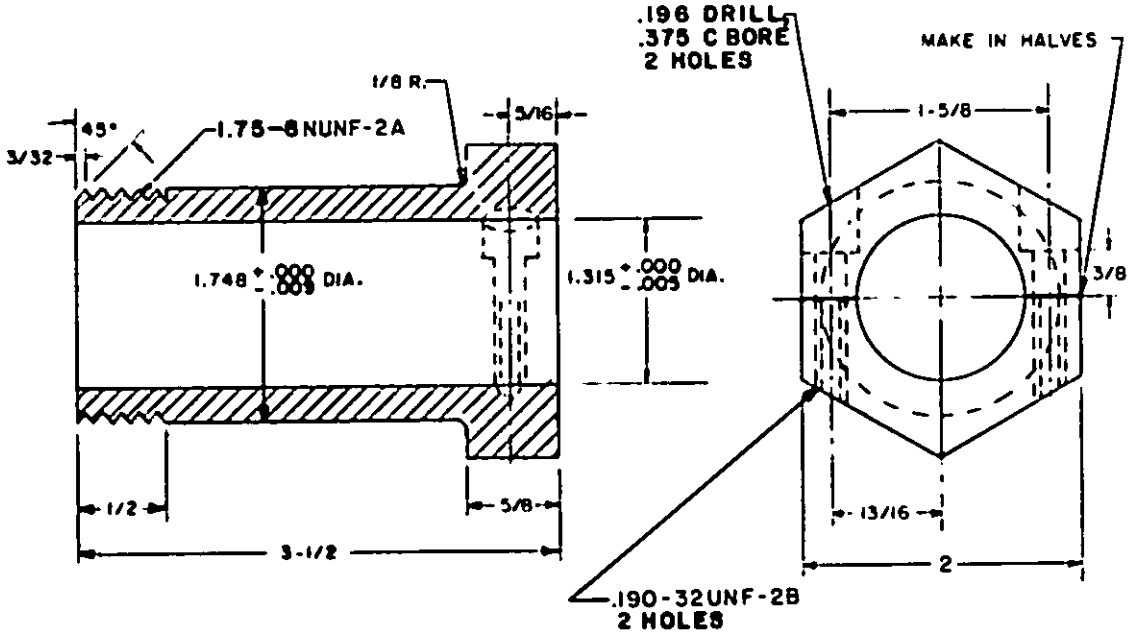

SH12871


(05) FIGURE 3. Adapter sleeve.

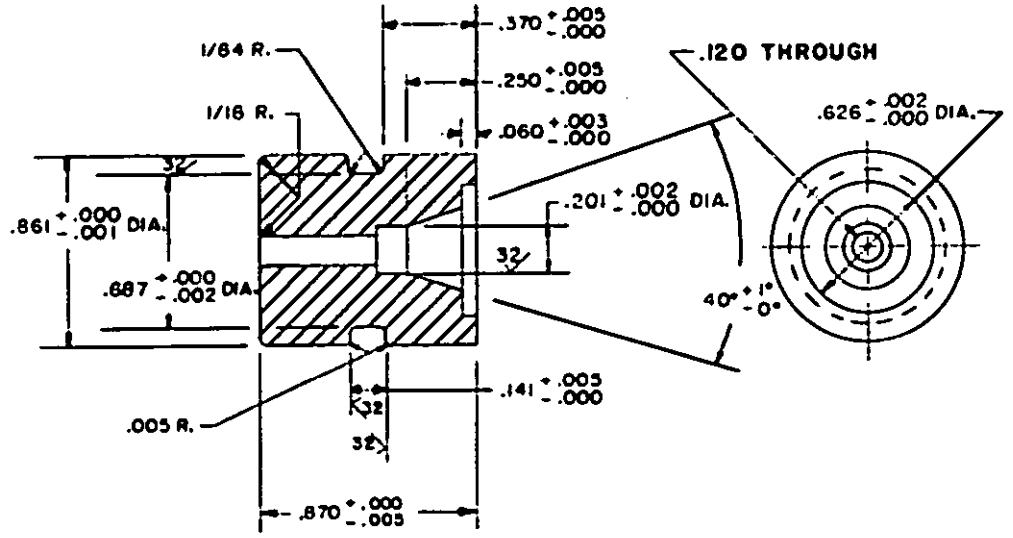

SH12872

(03) FIGURE 4. Gland.


Source: https://assist.dla.mil -- Downloaded: 202610-19T09:25Z
Check the source to verify that this is the current version before use.

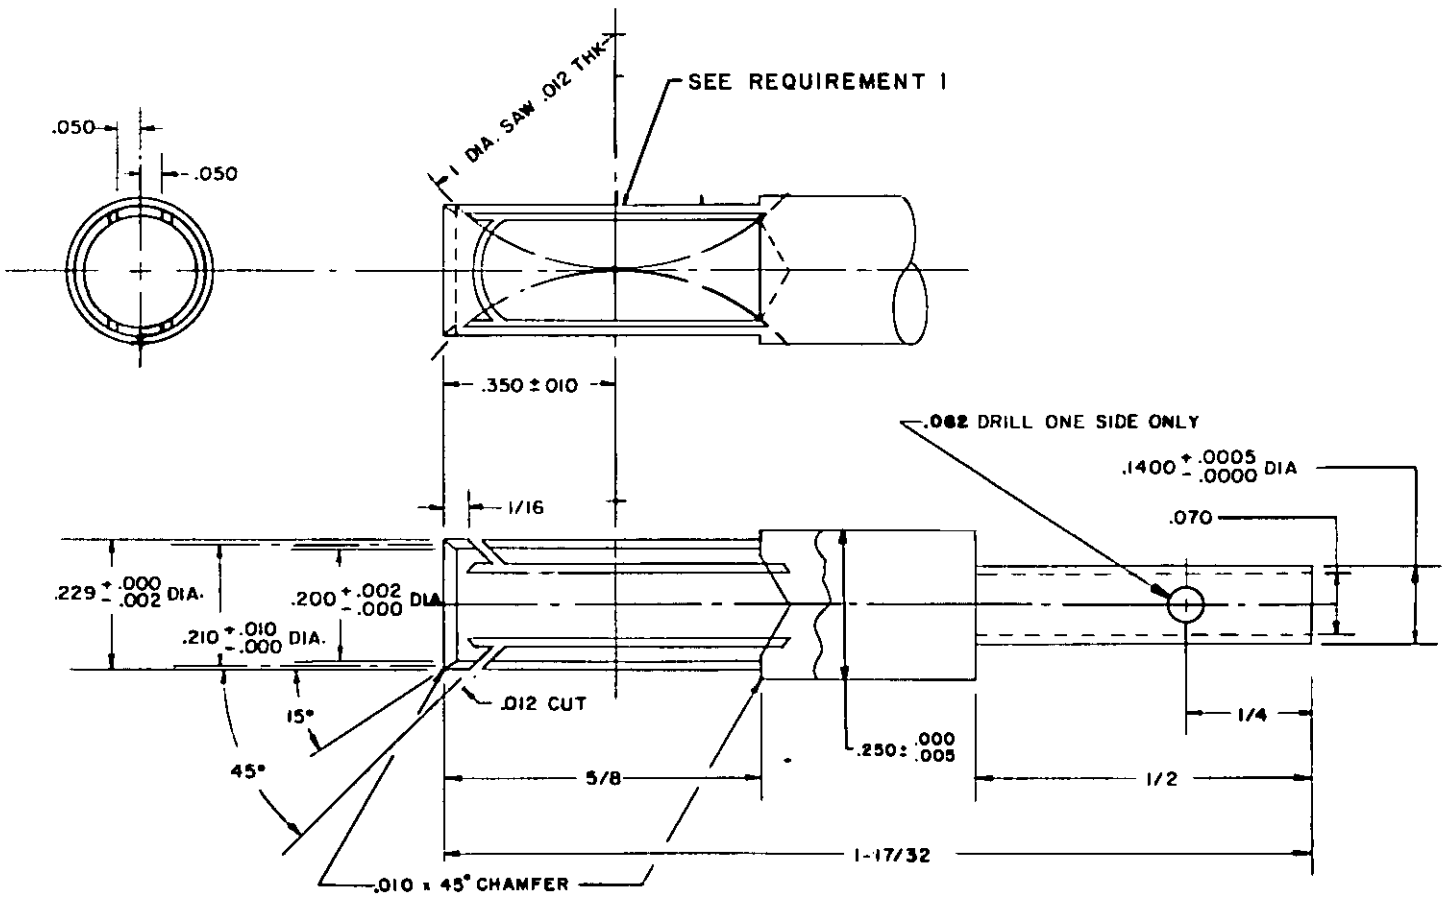

SH12873


04 FIGURE 5. Contact.

Source: https://assist.dla.mil Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

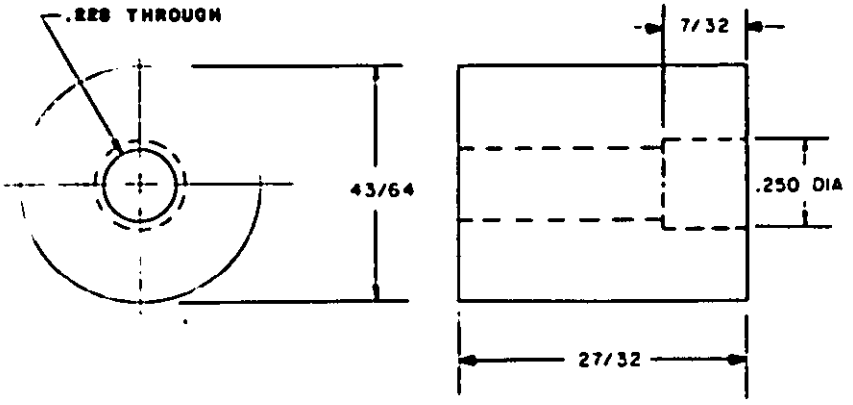


SH12874

06 FIGURE 6. Insulator bushing.

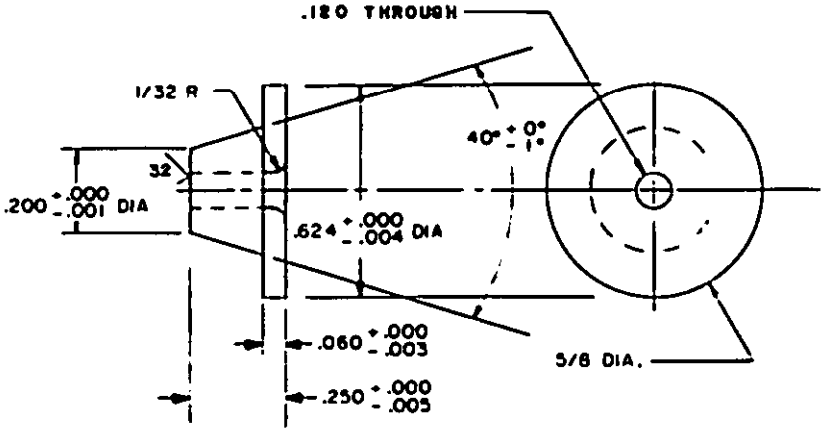

SH12875


02 FIGURE 7. Packing retainer.

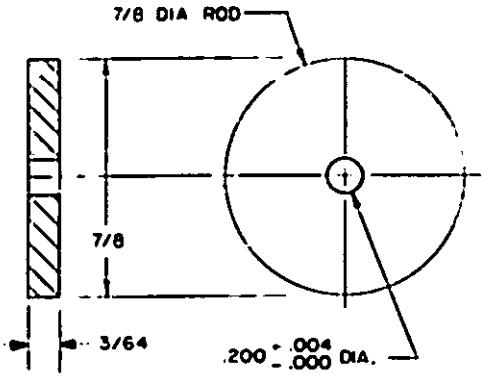

SH12876


10 FIGURE 8. Washer.

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:25Z
Check the source to verify that this is the current version before use.

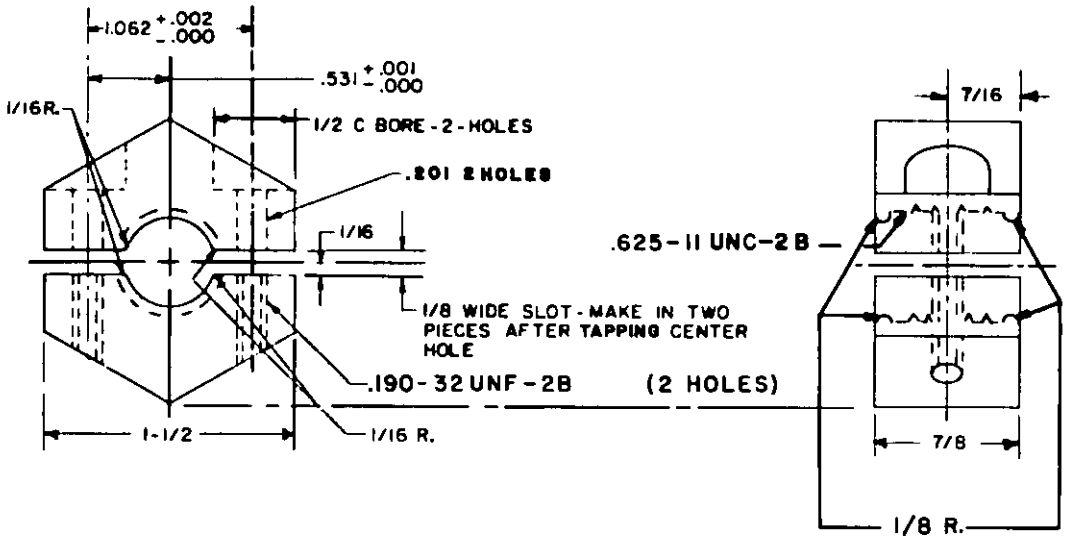

SH12877


(12) FIGURE 9. Clamp.

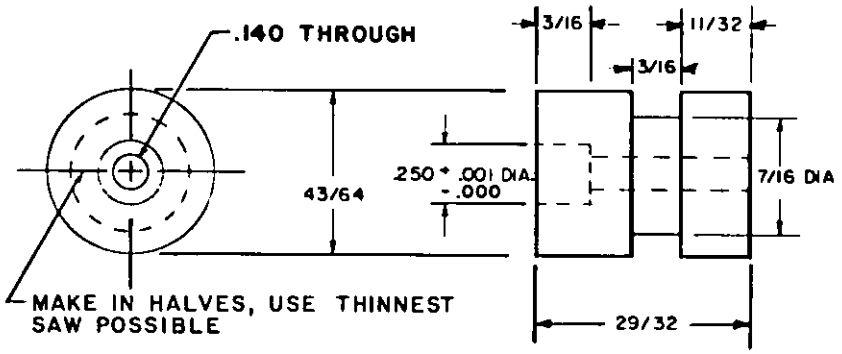

SH12878

(09) FIGURE 10. Insulator bushing.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

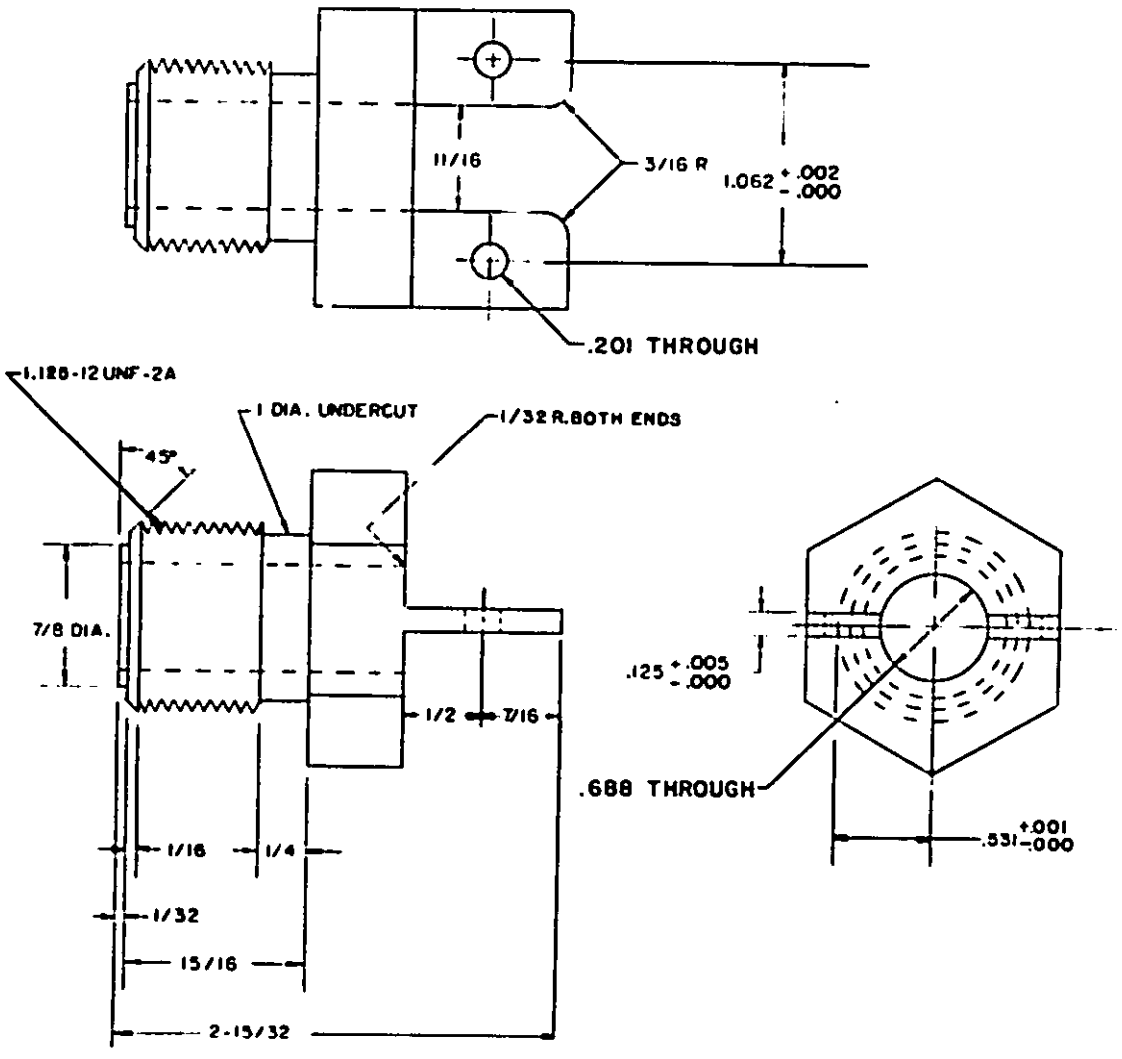

SH12879

(11) FIGURE 11. Body nut.

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:25Z
Check the source to verify that this is the current version before use.

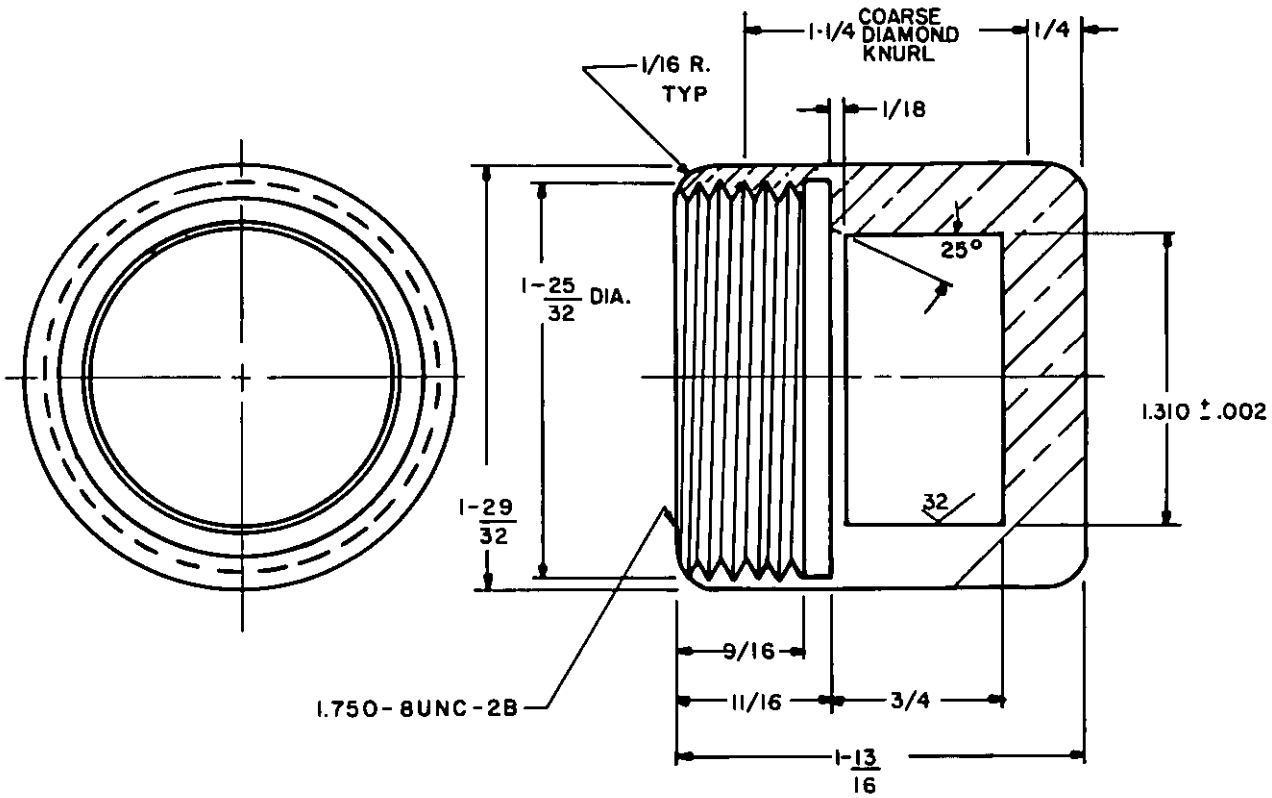

SH12880

(15) FIGURE 12. Cap pressure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no. 1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	Brass, Naval, QQ-B-637	REB101660
02	Packing Retainer	7	1	Brass, Naval, QQ-B-637	REA101662
03	Gland	4	1	Brass, Naval, QQ-B-637	REB101659
04	Contact 3/	5	1	Copper, Beryllium, QQ-C-530, HT	REB101663
05	Adapter Sleeve	3	1	Brass, Naval, QQ-B-637	REB101664
06	Insulator Bushing	6	1	Teflon, TFE or FEP, Coml	REB101657
07	Socket Head Cap Screw 0.190-32 UNF-2A x 1 L	-	4	CRES, Coml	-
08	Lockwasher	-	4	CRES, Coml	-
09	Insulator Bushing	10	1	Teflon, TFE or FEP, Coml	REA101658
10	Washer	8	1	Brass, Naval, QQ-B-637	REA101655
11	Body Nut	11	1	Brass, Naval, QQ-B-637	REB101661
12	Clamp	9	1	Brass, Naval, QQ-B-637	REA101656
13	Clamp 2/		1	MIL-H-21367/15, Fig. 12	REA101676
14	Pin, Hardening 2/		1	MIL-H-21367/15, Fig. 13	REA101675
15	Cap, Pressure	12	1	Manganese, Bronze, QQ-B-728, CL A, 1/2 HD	REB101777
16	O-Ring	-	1	MS28775-006	-
17	O-Ring	-	1	MS28775-111	-
18	O-Ring	-	2	MS28775-115	-
19	O-Ring	-	1	MS28775-215	-

1/ Item numbers are the same as numbers shown in circles on figures.
2/ These parts are used in the manufacturing and assembly of the contact item 04 (see figure 5) and shall not be delivered with the connector (see requirement 1).
3/ Silver plated.

REQUIREMENTS:

1. Hardening pin (item 14) shall be inserted in contact (item 04) and free ends of spring fingers shall be clamped against pin with clamp (item 13) then heat treated in accordance with QQ-C-550. Remove pin and clamp after heat treatment.
2. Voltage rating for test purposes - 500V dc.
3. Frequency rating - VLF/LF.

NOTES:

1. Military part number M21367/19-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-298/U cable conforms to MIL-C-22667.

Preparing activity:
Navy - SH
(Project 5935-N196-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.