MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, PLUG, TYPE UG-1405/U, FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


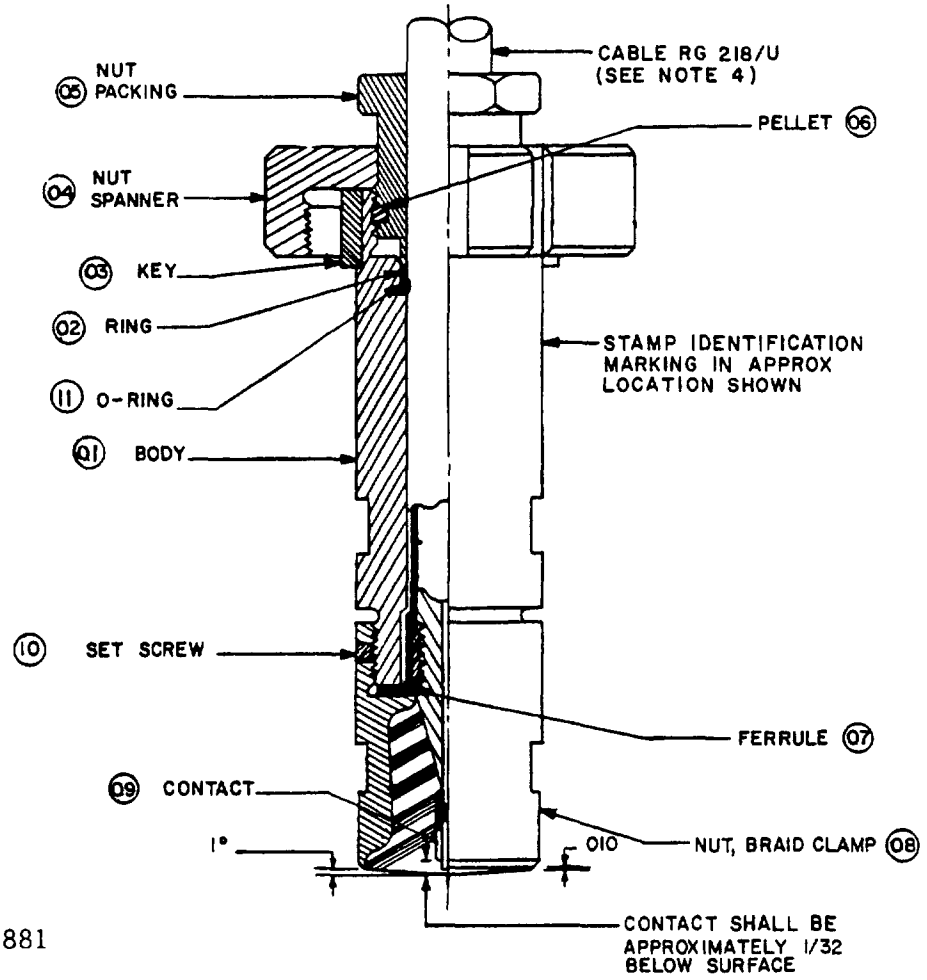


FIGURE 1. Connector plug assembly M21367/20-001 (UG-1405/U).

FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

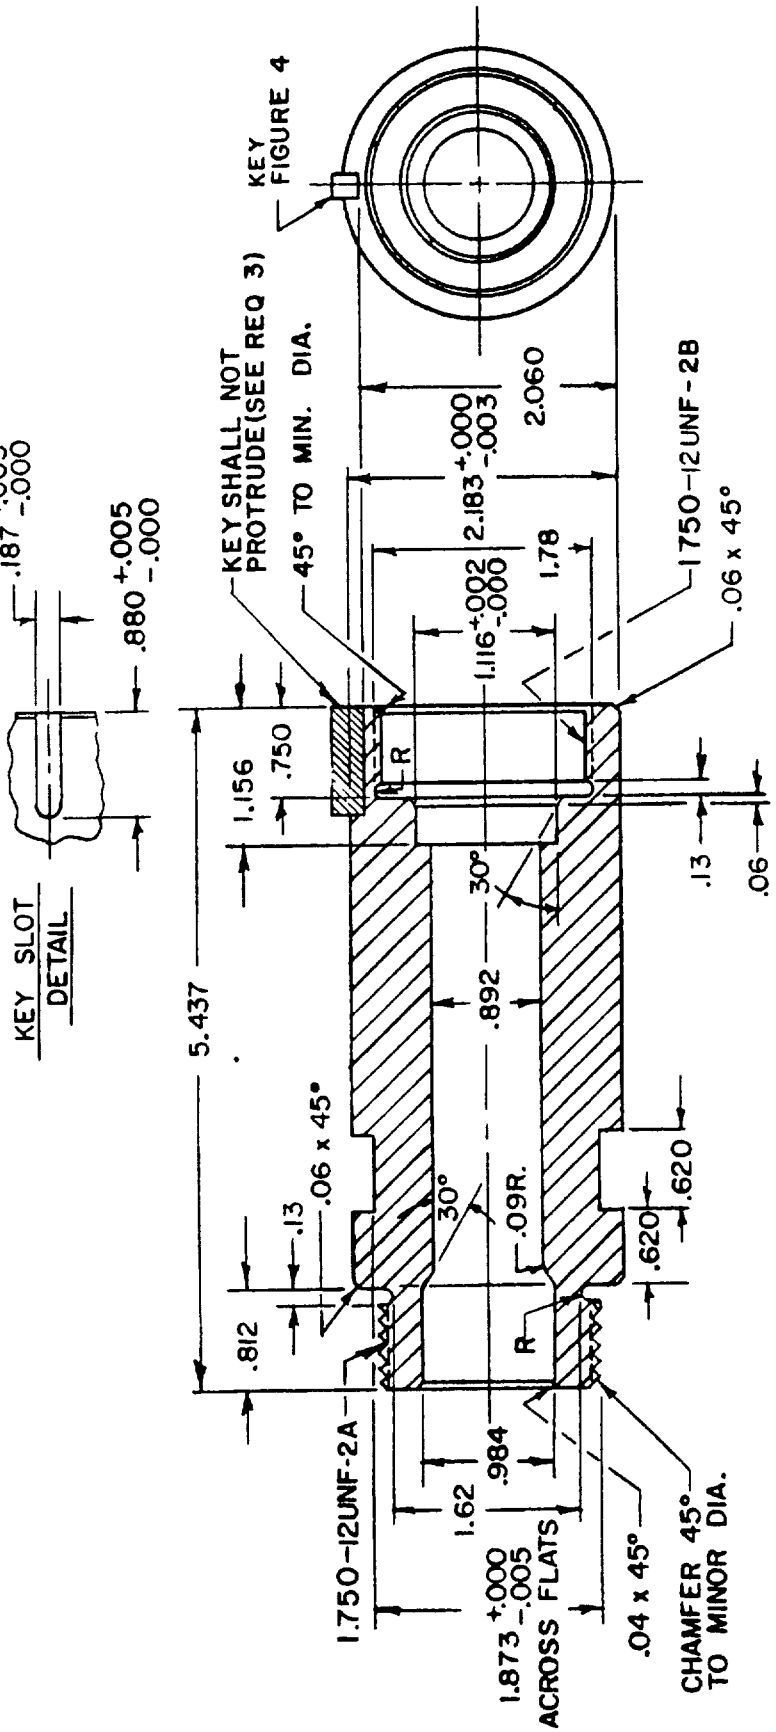

SH12882


(01) FIGURE 2. Body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

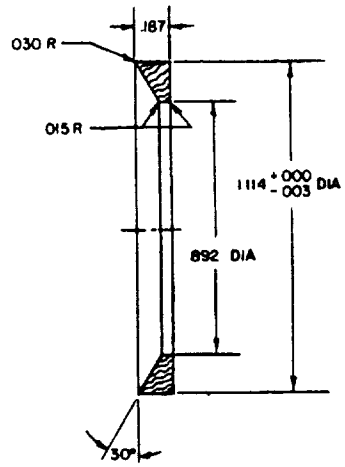


SH12883

02 FIGURE 3. Ring.

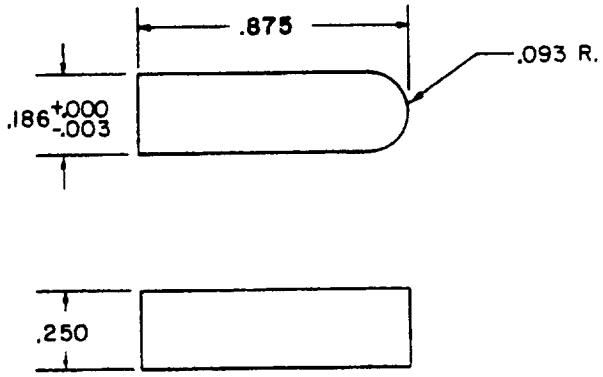


SH12884

03 FIGURE 4. Key.

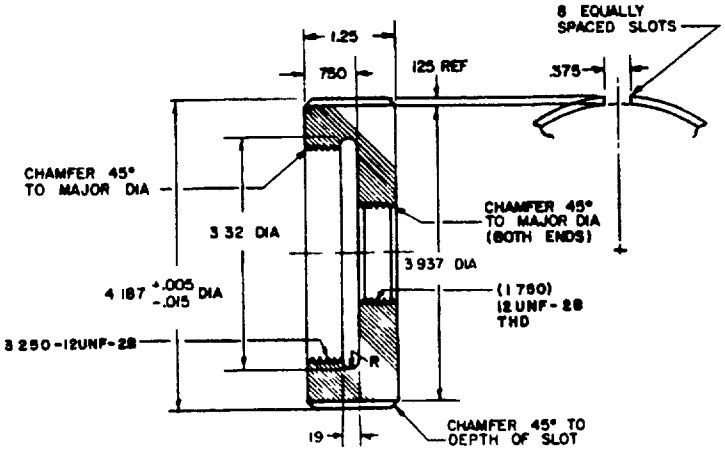


SH12885

04 FIGURE 5. Nut spanner.

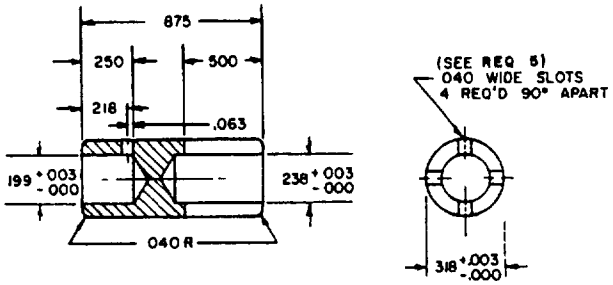


SH12886

09 FIGURE 6. Contact.

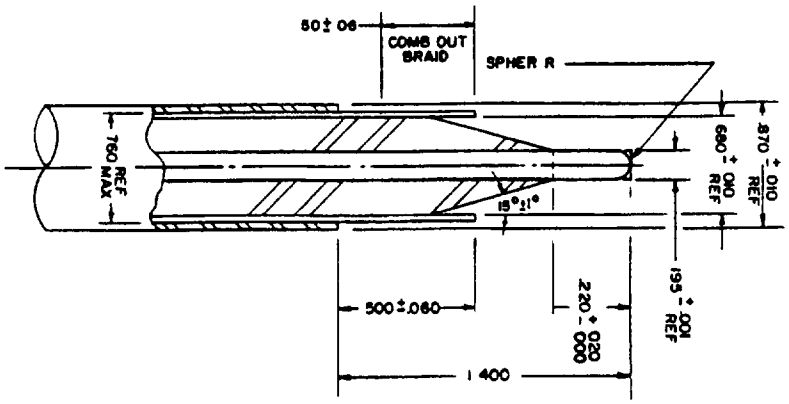

SH12887


FIGURE 7. Cable preparation.

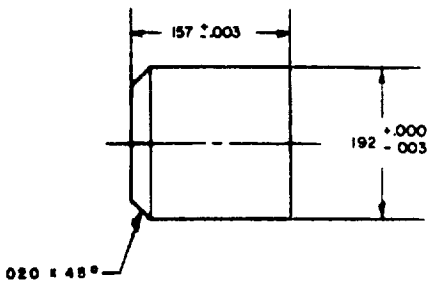


SH12888

06 FIGURE 8. Pellet.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

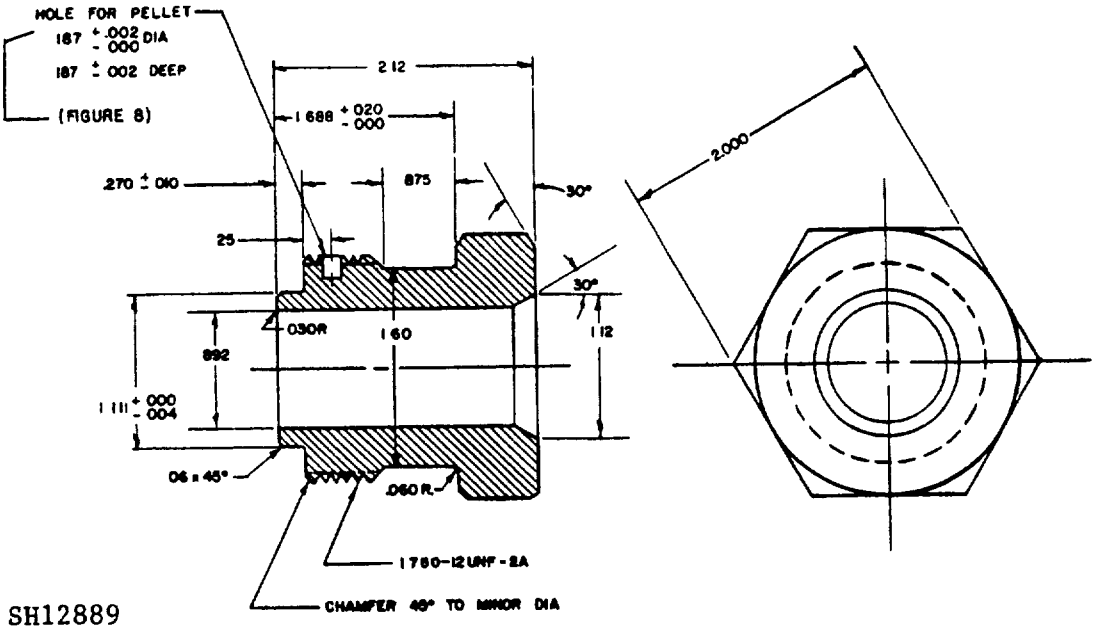

05 FIGURE 9. Nut packing.

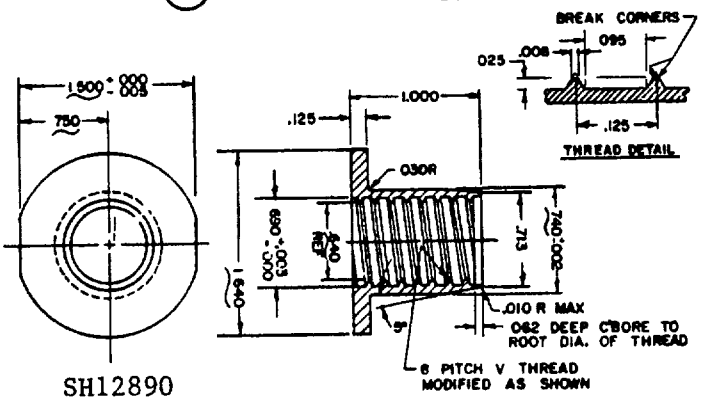

07 FIGURE 10. Ferrule.

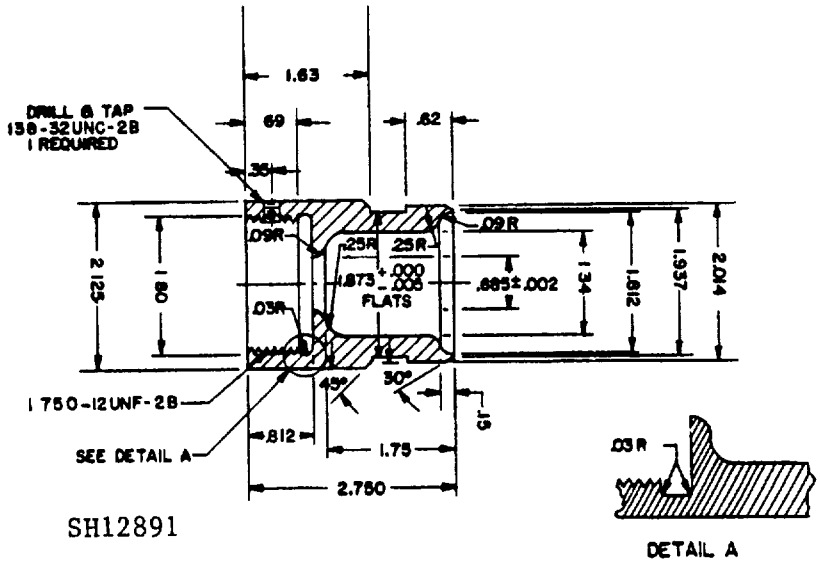

08 FIGURE 11. Nut, braid clamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REB101677
02	Ring	3	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REA101667
03	Key	4	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REA101672-2
04	Nut, Spanner	5	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REB101666
05	Nut, Packing	9	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REB101665
06	Pellet	8	1	Nylon, Type 2 L-P-410	REA101673
07	Ferrule2/	10	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REB101669
08	Nut, Braid Clamp2/	11	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REB101670
09	Contact2/	6	1	Copper, Beryllium, QQ-C-530 AT	REA101671
10	Screw, Set-Cone Point 0.138-32 UNC-2A x 3/16 L	-	1	CRES, Coml	-
11	O-Ring	-	1	MS28775-212	-

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Silver plated. In addition, nut braid clamp shall also be rhodium flashed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Slotted end of contact (item 9) shall be closed to 0.220 and heat treated in accordance with QQ-C-530.
2. Contact (item 9) shall be soft soldered to cable.
3. Contact (item 9) shall be plugged to full length with 0.250 diameter pin and remaining cavity shall be filled with silicone rubber (RTV).
4. Key shall be soft soldered in place.
5. Cable shall be prepared in accordance with figure 7 before assembly of the plug.
6. Voltage rating for test purposes - 500V dc.
7. Frequency rating - VLF/LF.

NOTES:

1. Military part number M21367/20-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions, plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-218/U cable conforms to MIL-C-17/79.

Preparing activity:
Navy - SH
(Project 5935-N196-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.