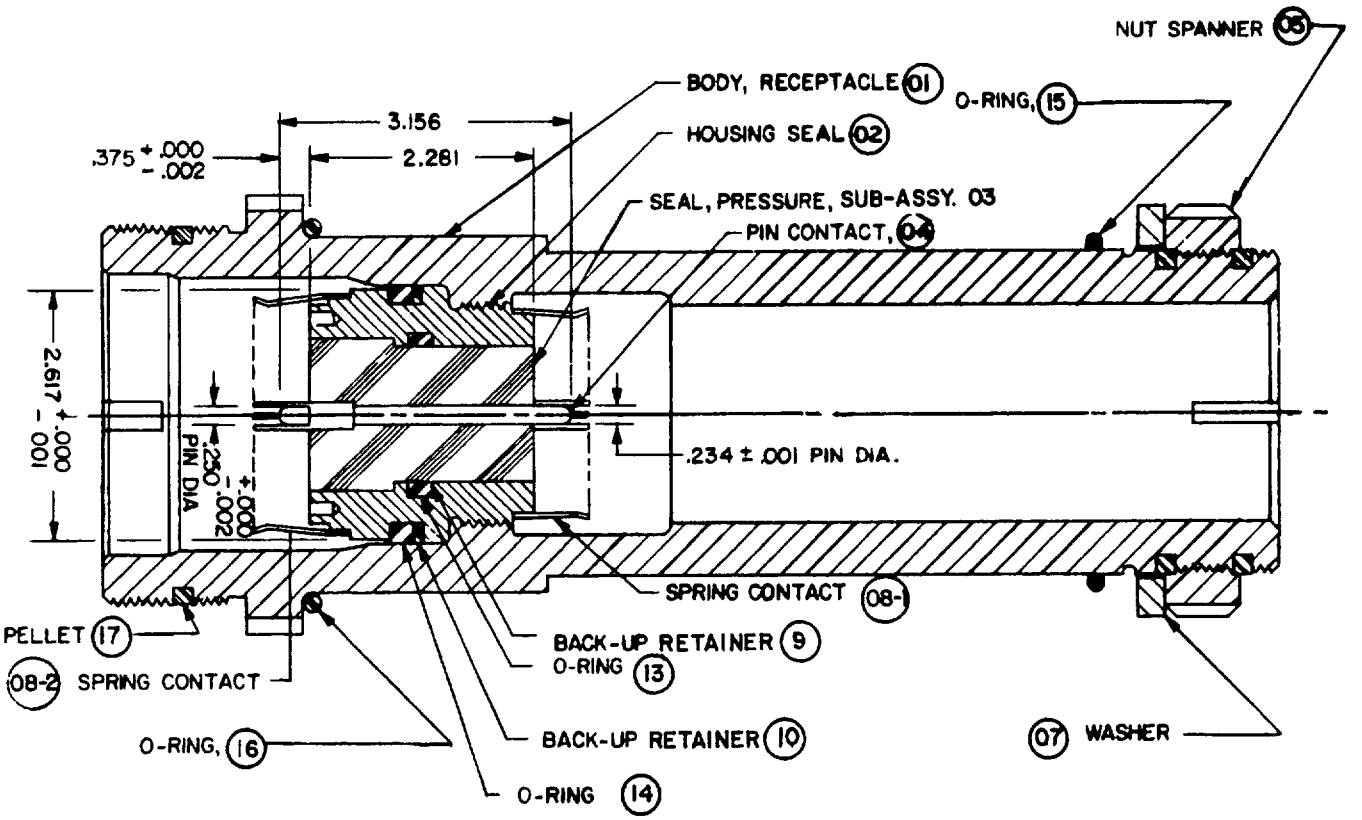
MILITARY SPECIFICATION SHEET

# HULL FITTING, CONNECTOR, RECEPTACLE, TYPE UG-1406/U FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).




SH12892

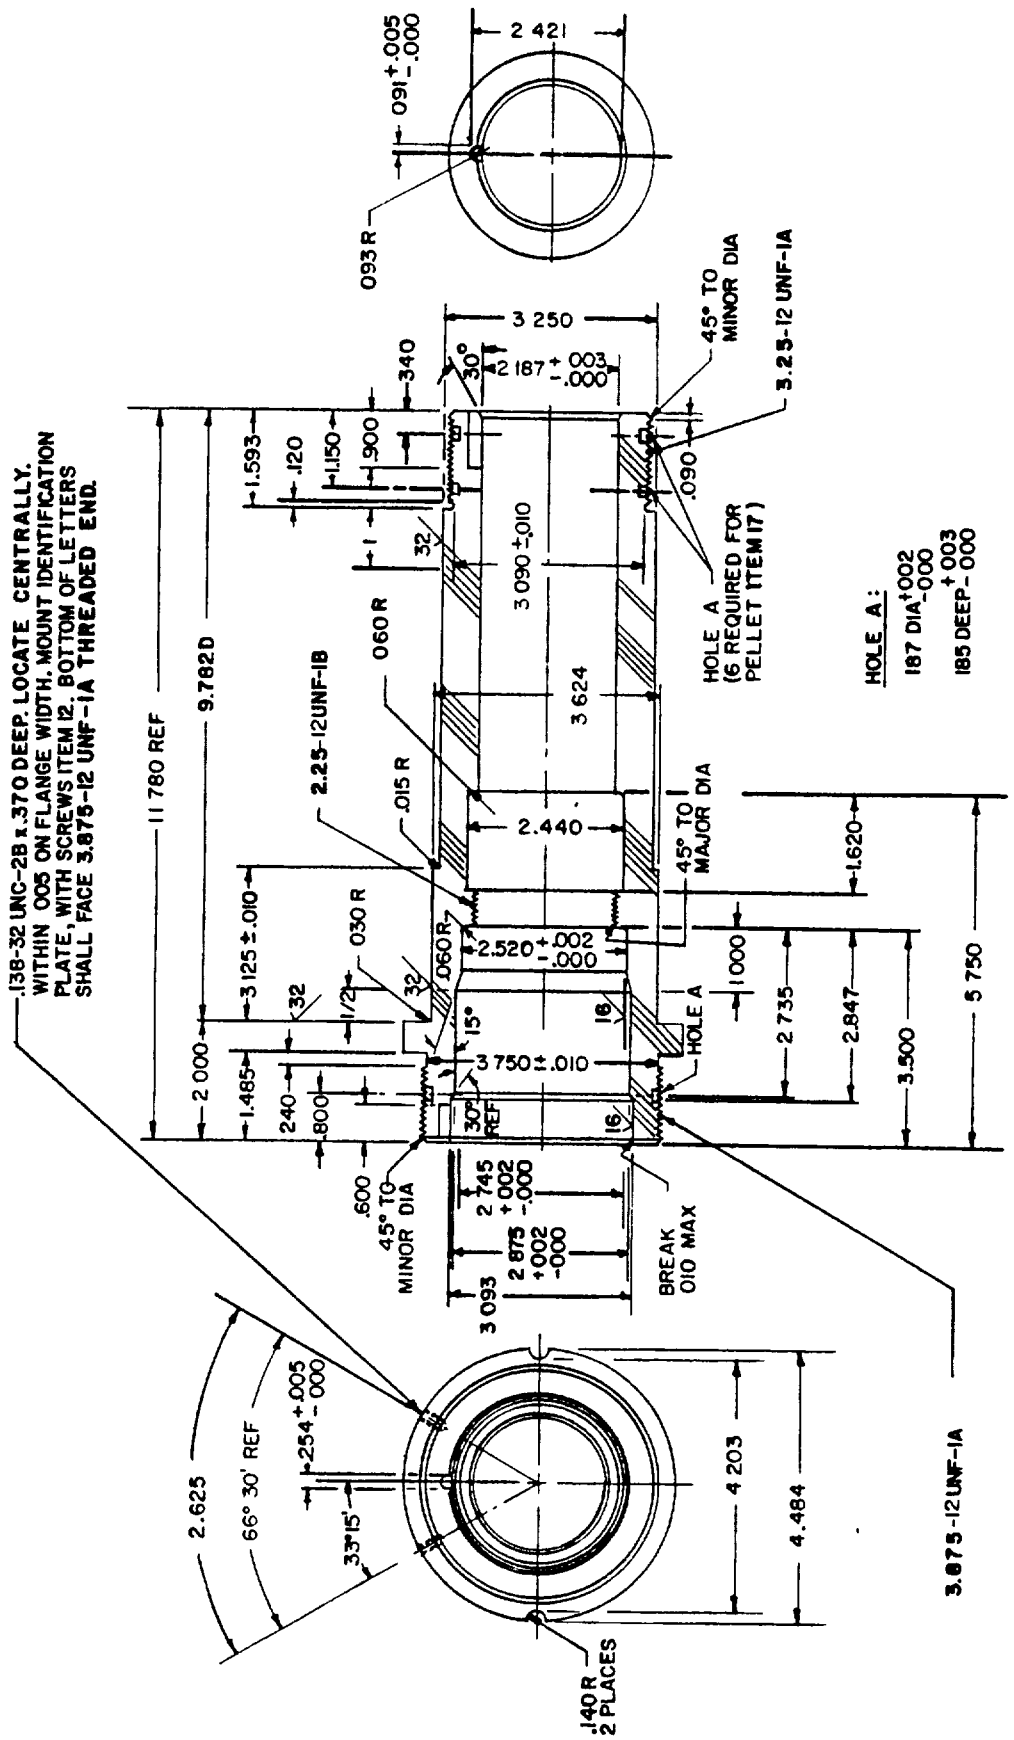
FIGURE 1. Connector, receptacle, M21367/21-001 (UG-1406/U).

FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

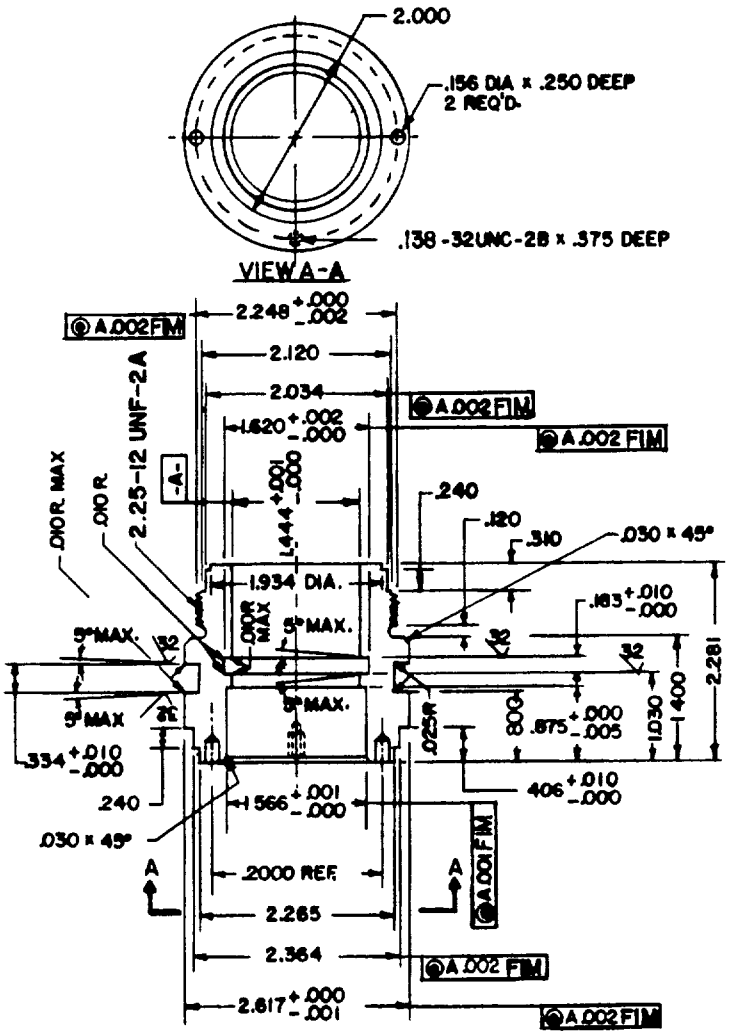



SH12893

(01) FIGURE 2. Body receptacle.

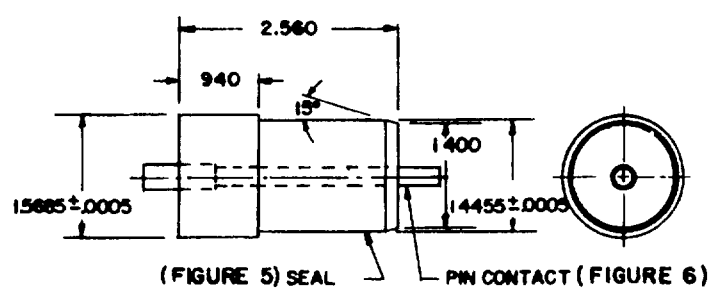


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.




SH12894

(02) FIGURE 3. Housing seal.



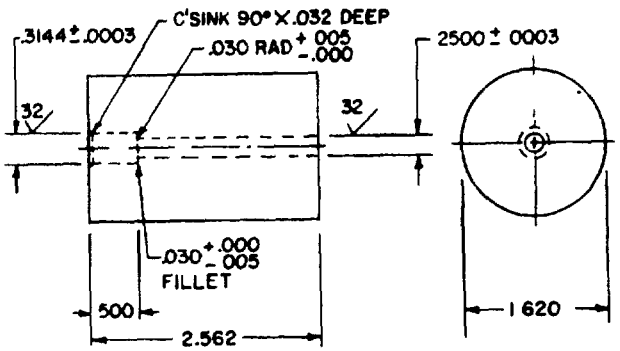

(03) REQUIREMENT I

SH12895

FIGURE 4. Pressure seal subassembly.

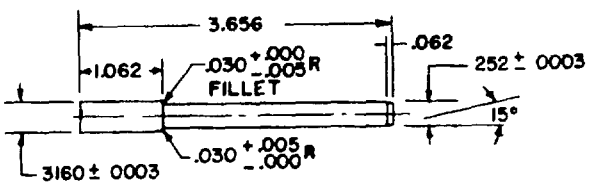


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.



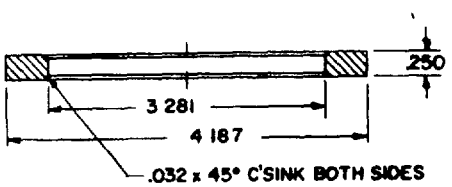

SH12896

06 FIGURE 5. Seal.




SH12897

04 FIGURE 6. Pin contact.

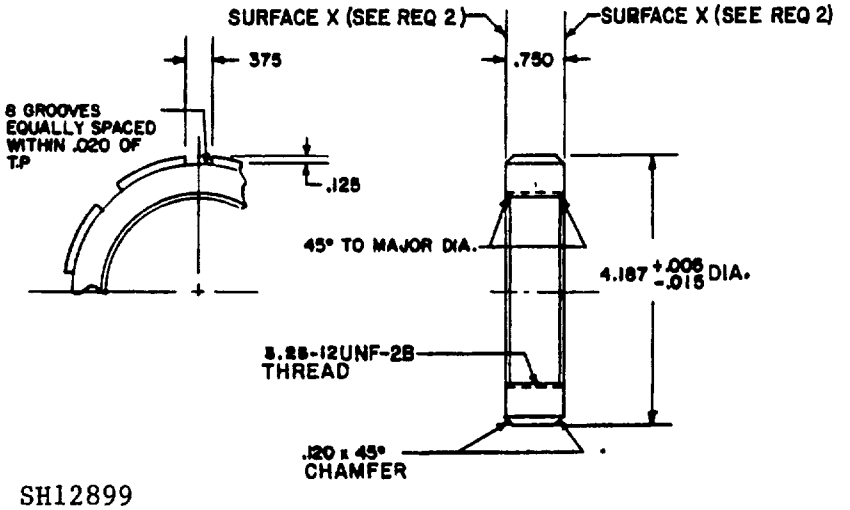



SH12898

07 FIGURE 7. Washer.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

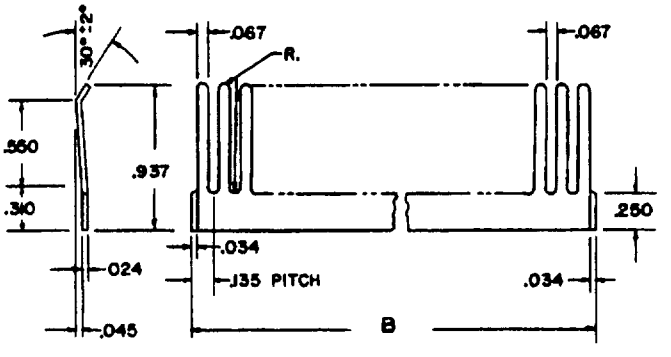




SH12899


FIGURE 8. Nut spanner.

| ITEM 08- | A ↓ +.000 -.060 | B | CONTACTS |
|---|---|---|---|
| 1 | 2.384 | 7527 | 55 |
| 2 | 2.054 | 6.474 | 47 |

↓FORM SPRING TO DIAMETER SPECIFIED. SOME OVERLAP PERMISSIBLE.



SECTION A-A

SH12900

FIGURE 9. Spring contact.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

| Item no.1/ | Description | Fig | Qty | Material/spec | Formerly covered on Drawing |
|---|---|---|---|---|---|
| 01 | Body, Receptacle | 2 | 1 | NI-CU-AL Alloy QQ-N-286, CL A, AN and AH | RED101722 |
| 02 | Housing, Seal2/ | 3 | 1 | Brass, QQ-B-626, Alloy 360, 1/2 HD | REB101717 |
| 03 | Seal, Pressure-Subassembly | 4 | 1 | See requirements | REB101718 |
| 04 | Pin, Contact | 6 | 1 | Copper-Beryllium, QQ-C-530, HT | REA101714 |
| 05 | Nut Spanner | 8 | 1 | NI-CU-AL Alloy, QQ-N-286, CL A, AN and AH | REA101712-2 |
| 06 | Seal | 5 | 1 | Plastic-Lexani, Coml | REA101713 |
| 07 | Washer | 7 | 1 | NI-CU-AL Alloy, QQ-N-286, CL A, AN and AH | REA101719 |
| 08-1 | Spring, Contact2/ | 9 | 1 | Copper-Beryllium, QQ-C-533 AT | REB101721-1 |
| 08-2 | Spring, Contact2/ | 9 | 1 | Copper-Beryllium, QQ-C-533 AT | REB101721-2 |
| 09 | Back-Up Retainer | - | 1 | MS28774-127 | - |
| 10 | Back-Up Retainer | - | 1 | MS28774-331 | - |
| 11 | Silicone Grease3/ | - | A/R | MIL-S-8660 | - |
| 12 | Screw, Mach 0.138-32 UNC-2A x 1/4 L | - | 2 | CRES, Coml | - |
| 13 | O-Ring | - | 1 | MS28775-127 | - |
| 14 | O-Ring | - | 1 | MS28775-331 | - |
| 15 | O-Ring | - | 1 | MS28775-339 | - |
| 16 | O-Ring | - | 1 | MS28775-342 | - |
| 17 | Pellet | - | 6 | MIL-H-21367/20, Fig. 8 | - |

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Silver plated and rhodium flashed.
3/ See requirement 1.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Assembly for pressure seal assembly shall be as follows:

   (a) Inside surfaces of seal (item 06) shall be lined with a small amount of silicone grease. The seal shall be then baked in an oven at 220°F for 1 hour.
   (b) Pin contact (item 04) shall be dropped in liquid air at minus 360°F and frozen.
   (c) The seal shall be removed from the oven and the pin from the liquid air and the pin contact shall be pressed into the seal immediately.
   (d) When the seal subassembly reaches room temperature, it shall be machined to the dimensions specified on figure 4. Permissible centers shall not exceed a depth of 0.250 inch.

2. A dry film lubricant in accordance with MIL-L-22273 shall be applied to a thickness of 0.0003 inch maximum to all threaded surfaces and the surfaces indicated as "surface X" on figure 8.
3. Each connector shall be subjected to a hydrostatic pressure of 600 $lb/in^2$ for 1 hour. Test shall be conducted without cable attached.
4. Voltage rating for test purposes - 500V dc.
7. Frequency rating - VLF/LF.

NOTES:

1. Military part number M21367/21-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.

Preparing activity:
Navy - SH
(Project 5935-N196-5)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:25Z
Check the source to verify that this is the current version before use.