MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, PLUG, TYPE UG-1407/U FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


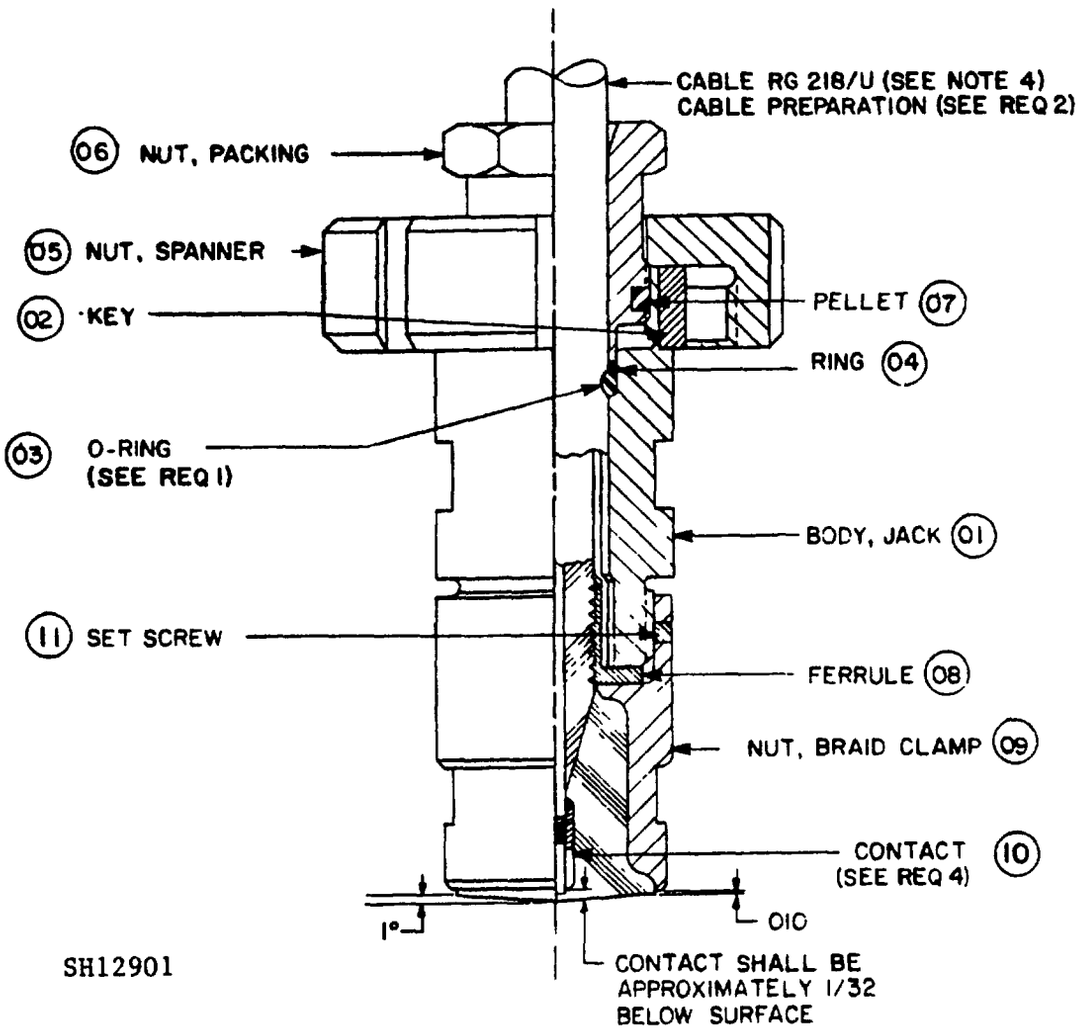


FIGURE 1. Connector, plug M21367/22-001(UG-1407/U).

FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

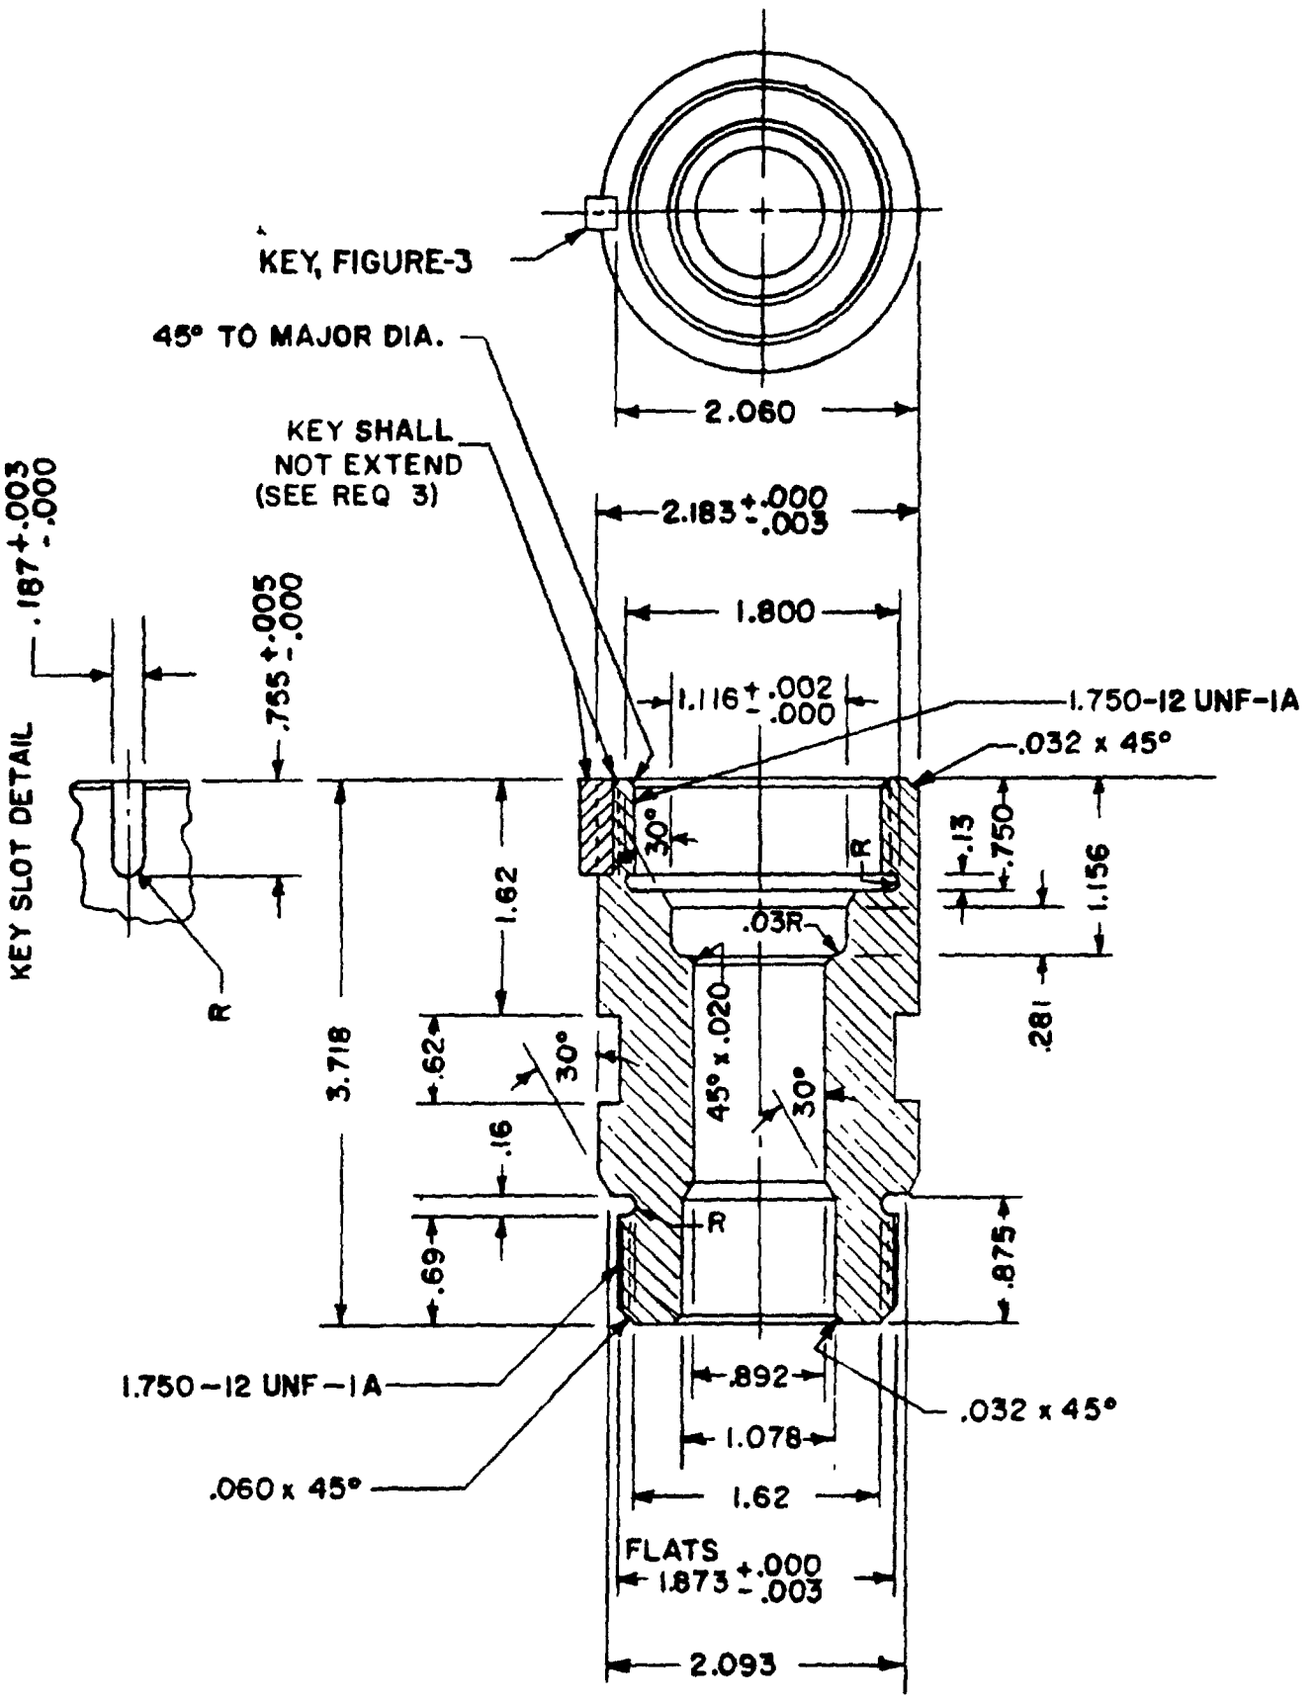

SH12902

(01) FIGURE 2. Body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

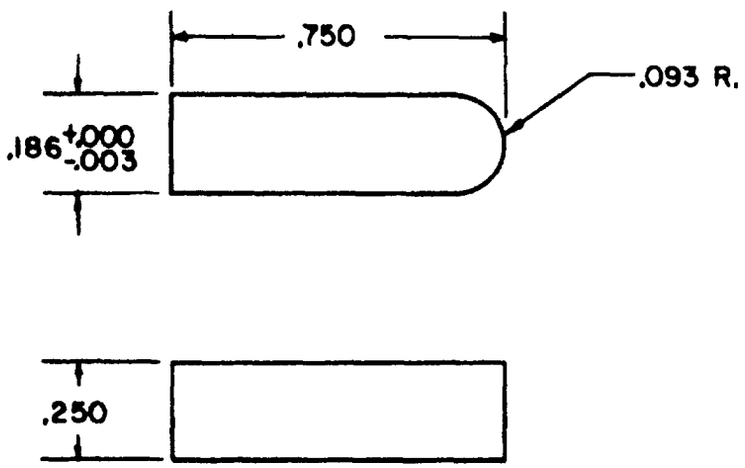

SH12903

02 FIGURE 3. Key.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body, Jack	2	1	Brass, QQ-B-626, Alloy 360 1/2 HD	REB101668
02	Key	3	1	Brass, QQ-B-626, Alloy 360 1/2 HD	REA101672-1
03	O-Ring	-	1	MS28775-212	-
04	Ring	-	1	MIL-H-21367/20, Fig. 3	-
05	Nut, Spanner	-	1	MIL-H-21367/20, Fig. 5	-
06	Nut, Packing	-	1	MIL-H-21367/20, Fig. 9	-
07	Pellet	-	1	MIL-H-21367/20, Fig. 8	-
08	Ferrule2/	-	1	MIL-H-21367/20, Fig. 10	-
09	Nut, Braid Clamp2/	-	1	MIL-H-21367/20, Fig. 11	-
10	Contact2/	-	1	MIL-H-21367/20, Fig. 6	-
11	Screw, Set-Cone Point 0.138-32 UNC-2A x 3/16 L	-	1	CRES, Coml	-
12	Silicone Grease	-	A/R	MIL-S-8660	

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Silver plated. In addition, nut braid clamp shall also be rhodium flashed.

REQUIREMENTS:

1. Cable shall be prepared in accordance with figure 7 of MIL-P-21367/20.
2. Key shall be soft soldered in place.
3. Plug contact (item 10) shall be plugged to full length with 0.250 diameter pin and remaining cavity shall be filled with silicone rubber RTV.
4. Voltage rating for test purposes - 500 V dc.
5. Frequency rating - VLF/LF.

NOTES:

1. Military part number M21367/22-001.
2. All dimensions are in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-218/U cable conforms to MIL-C-17/79.

Preparing activity:
Navy - SH
(Project 5935-N196-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.