MIL-H-21367/23(SH)
18 October 1985
SUPERSEDING
DRAWING REC 49416
20 March 1961

MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, RECEPTACLE TYPE UG-1408/U FOR FLEXIBLE, SOLID-DIELECTRIC RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


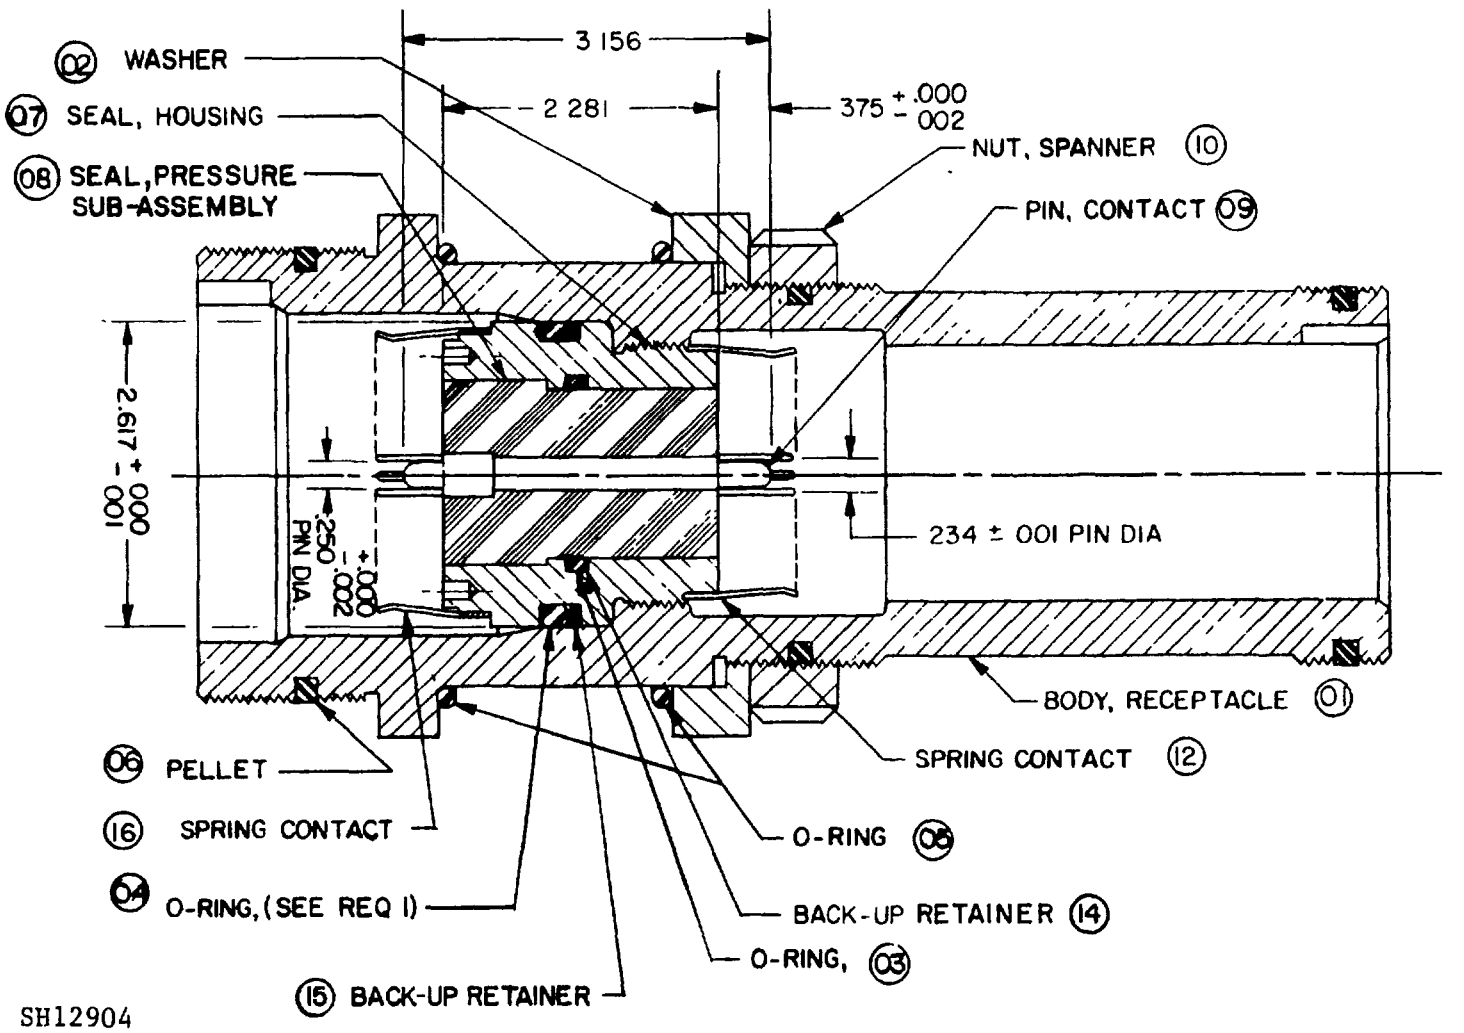


FIGURE 1. Connector, receptacle, M21367/23-001(UG-1408/U).

FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

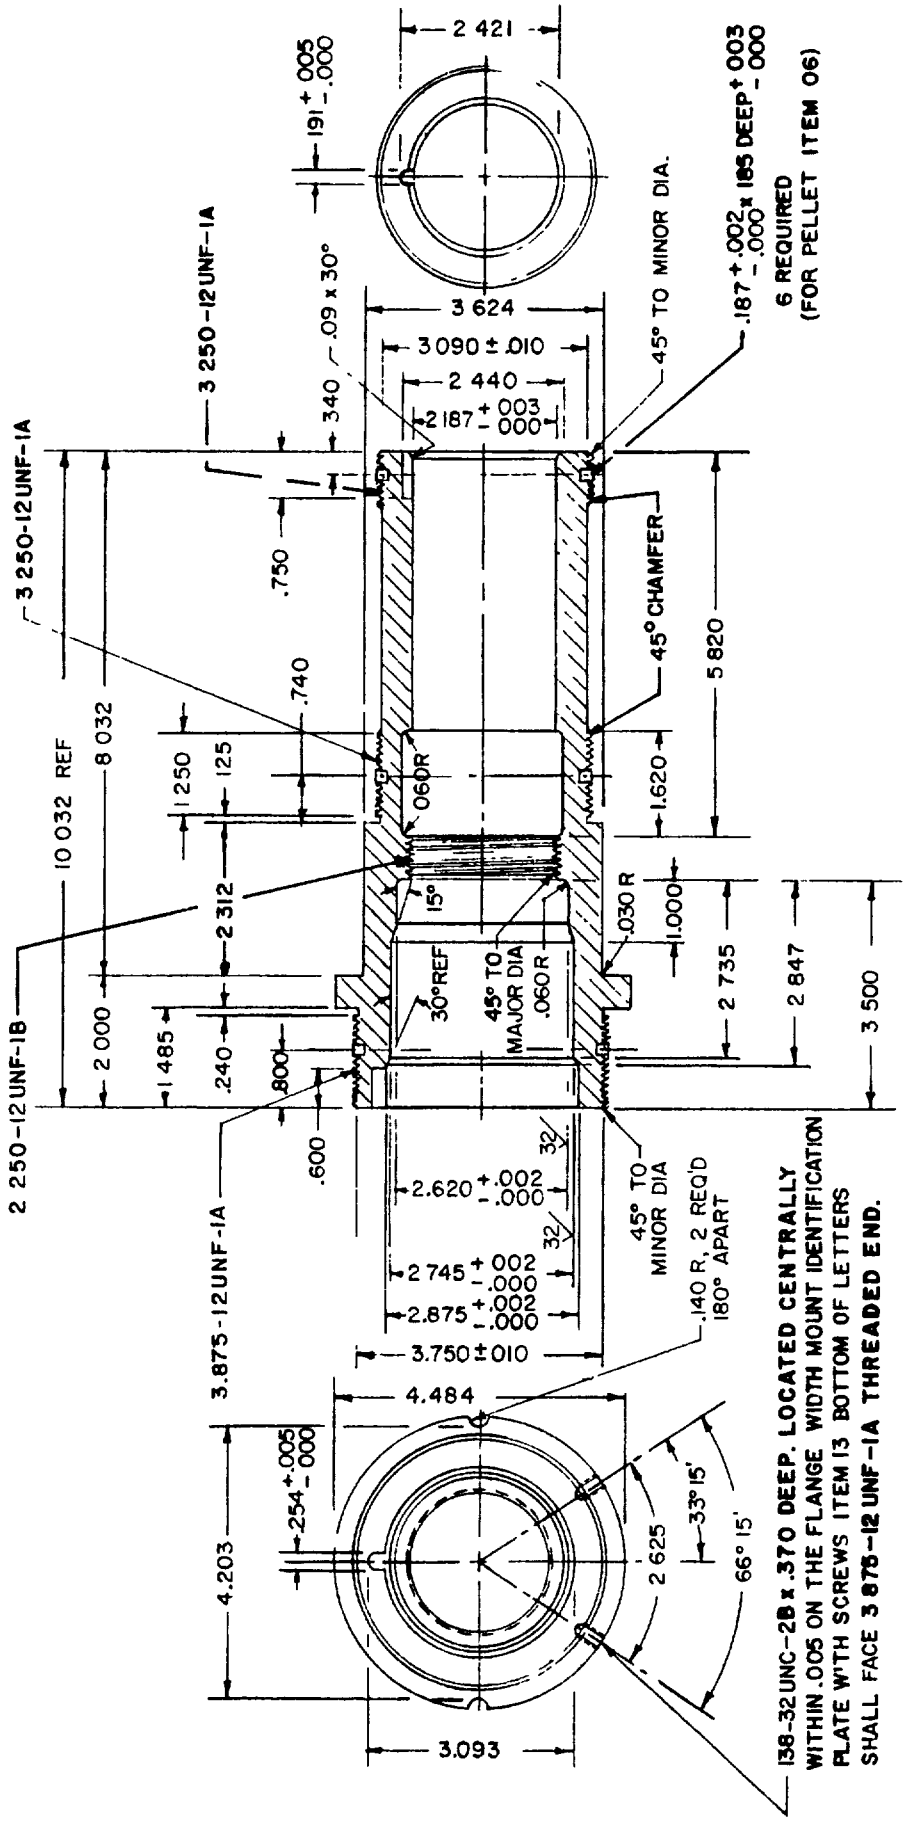

SH12905

(01) FIGURE 2. Body receptacle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

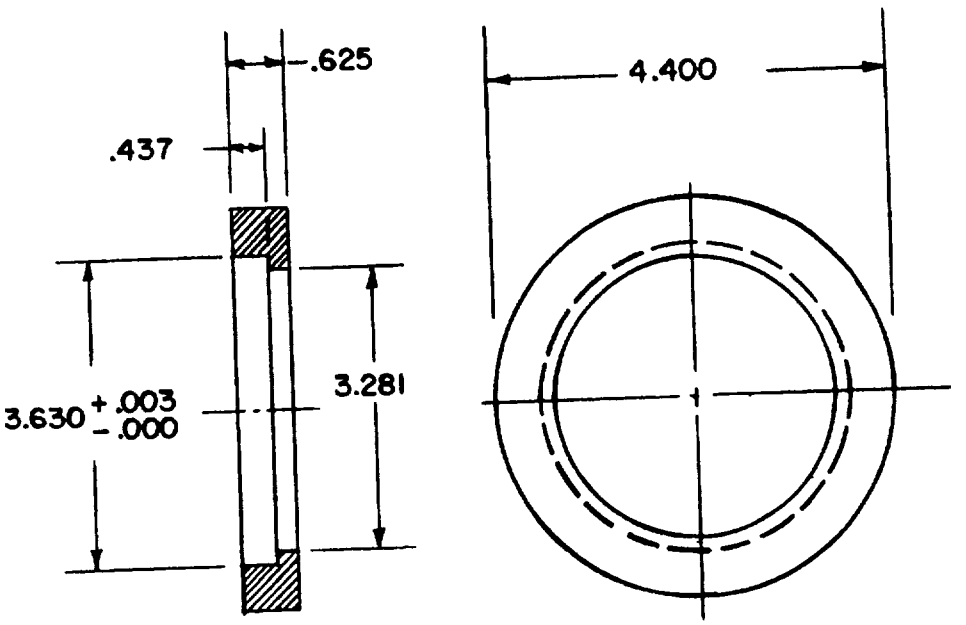

SH12906

02 FIGURE 3. Washer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body, Receptacle	2	1	NI-CU-AL Alloy, QQ-N-286 CL A	RED101720
02	Washer	3	1	CRES, QQ-S-764, Class 303 Condition A	REA101672
03	O-Ring	-	1	MS28775-127	-
04	O-Ring	-	1	MS28775-331	-
05	O-Ring	-	1	MS28775-342	-
06	Pellet	-	6	MIL-H-21367/20, Fig. 8	-
07	Housing, Seal2/	-	1	MIL-H-21367/21, Fig. 3	-
08	Seal, Pressure, Sub-Assy	-	1	MIL-H-21367/21, Fig. 4	-
09	Pin, Contact	-	1	MIL-H-21367/21, Fig. 6	-
10	Nut, Spanner	-	1	MIL-H-21367/21, Fig. 8	-
11	Seal2/	-	1	MIL-H-21367/21, Fig. 5	-
12	Spring Contact2/	-	1	MIL-H-21367/21, Fig. 9 (item 08-1)	-
13	Screw, Mach R.H., 0.138-32 UNC-2A x 1/4 L	-	2	CRES, Coml	- -
14	Back-Up Retainer	-	1	MS28774-127	-
15	Back-Up Retainer	-	1	MS28774-331	-
16	Spring Contact2/	-	1	MIL-H-21367/21, Fig. 9 (item 08-2)	-

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Silver plated and rhodium flashed.

REQUIREMENT:

1. O-Ring MS28775-331 shall be assembled to back up retainer MS28774-331 using silicone grease GE compound 81508, or equal.

NOTES:

1. Military part number M21367/23-001.
2. All dimensions are in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.

Preparing activity:
Navy - SH
(Project 5935-N196-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.