MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, PLUG TYPE UG-1421/U FOR FLEXIBLE, SOLID-DIELECTRIC RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


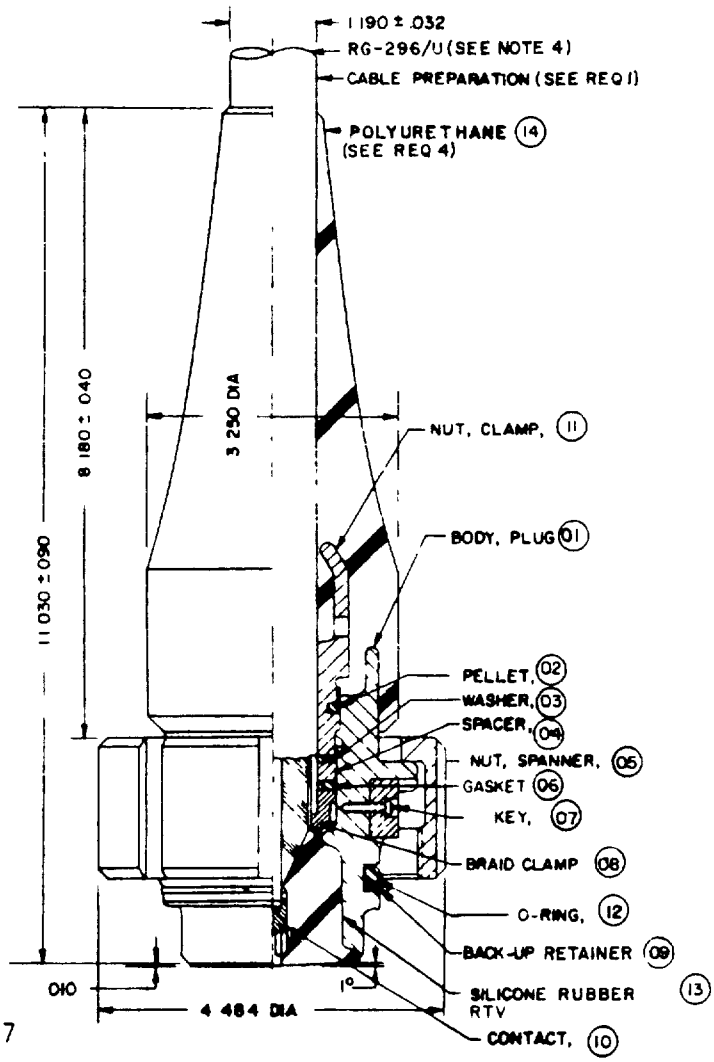


FIGURE 1. Connector, plug assembly M21367/24-001 (UG-1421/U).

FSC 5935


DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

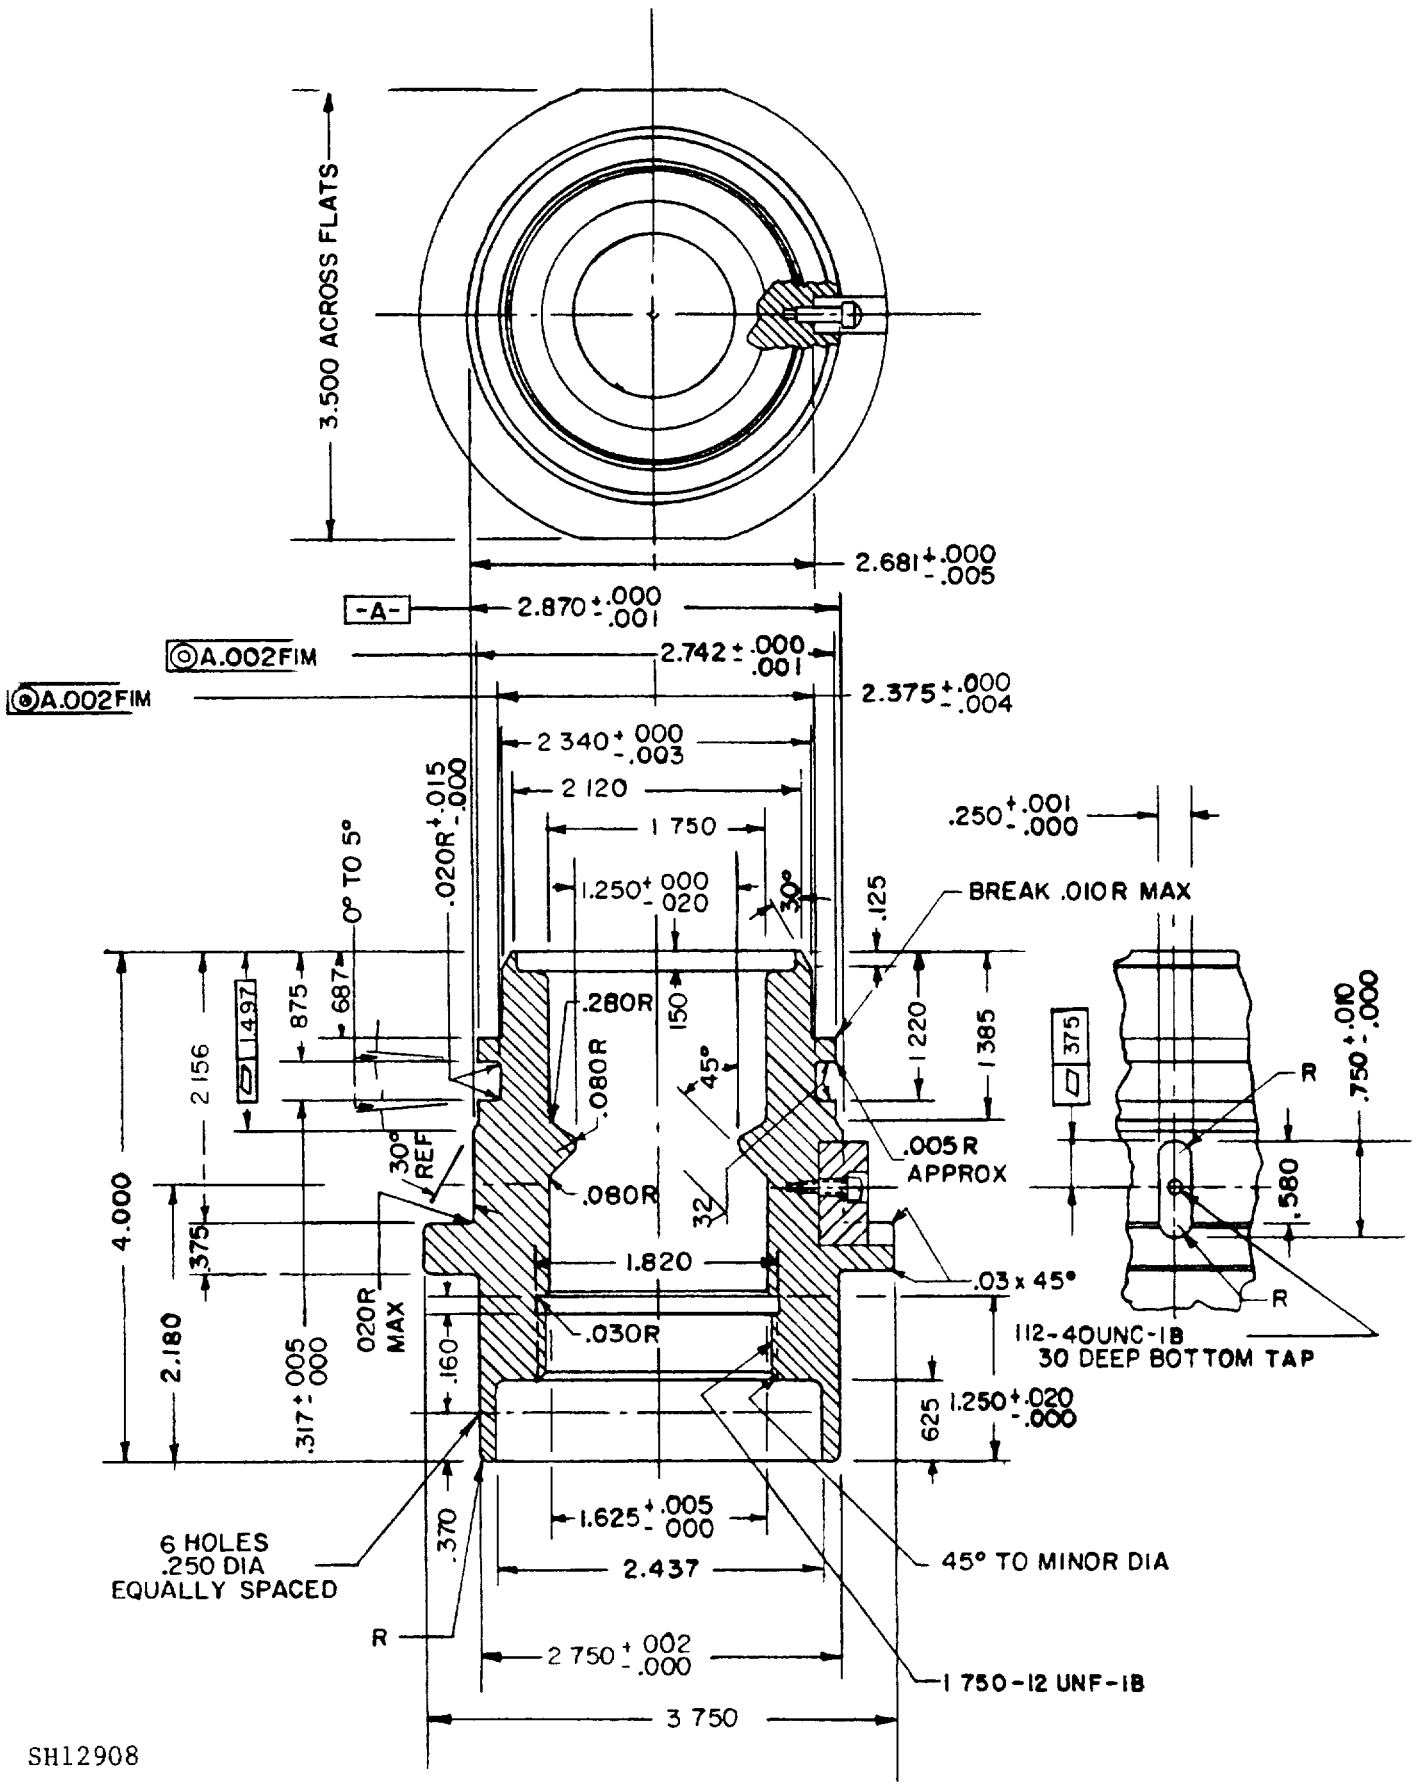


01 FIGURE 2. Body plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

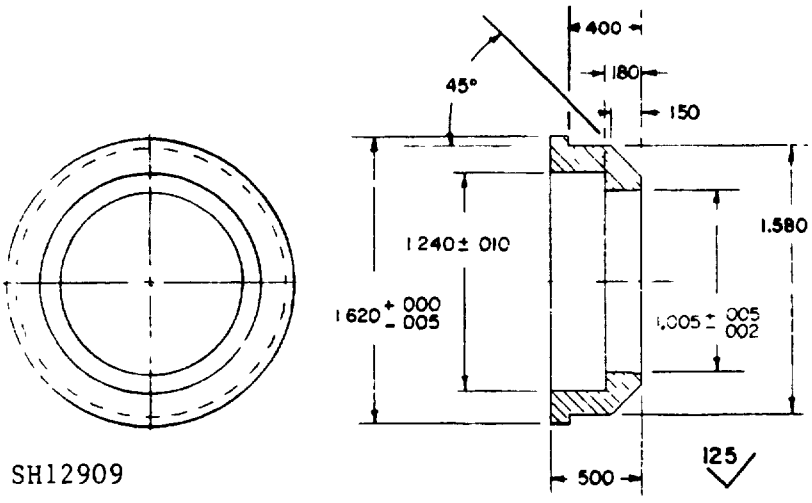


SH12909

(08) FIGURE 3. Braid clamp.

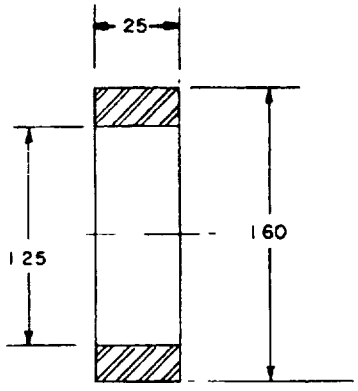


SH12910

(06) FIGURE 4. Gasket.




SH12911

(02) FIGURE 5. Pellet.

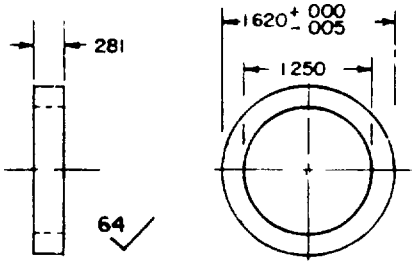


SH12912

(04) FIGURE 6. Spacer.

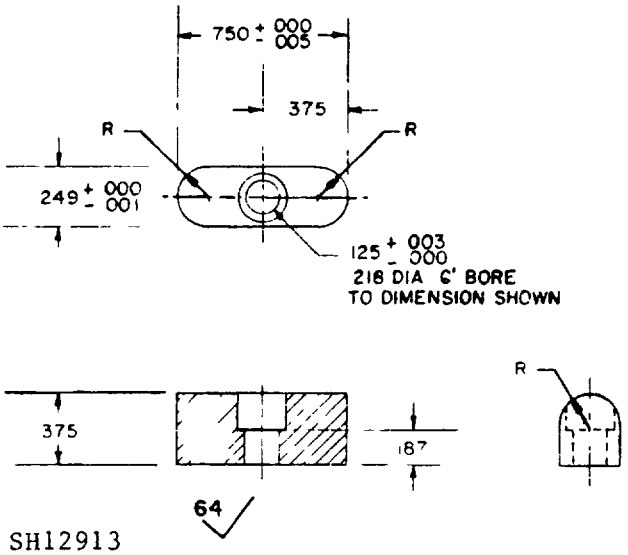


SH12913

(07) FIGURE 7. Key.

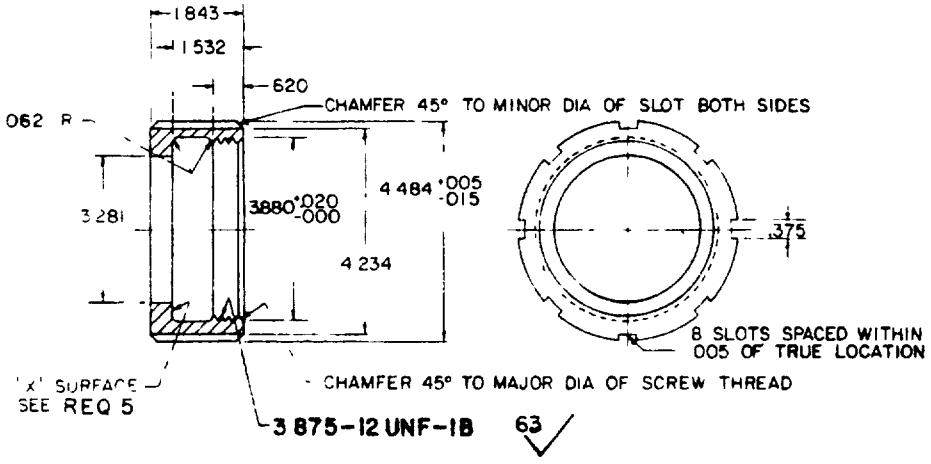

SH12914


(05) FIGURE 8. Nut spanner.

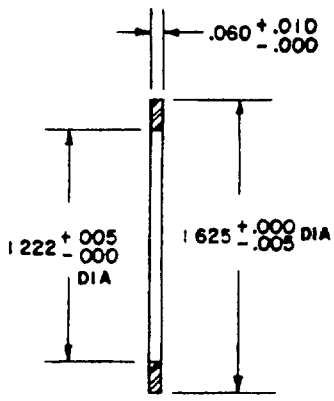

SH12915


(03) FIGURE 9. Washer

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

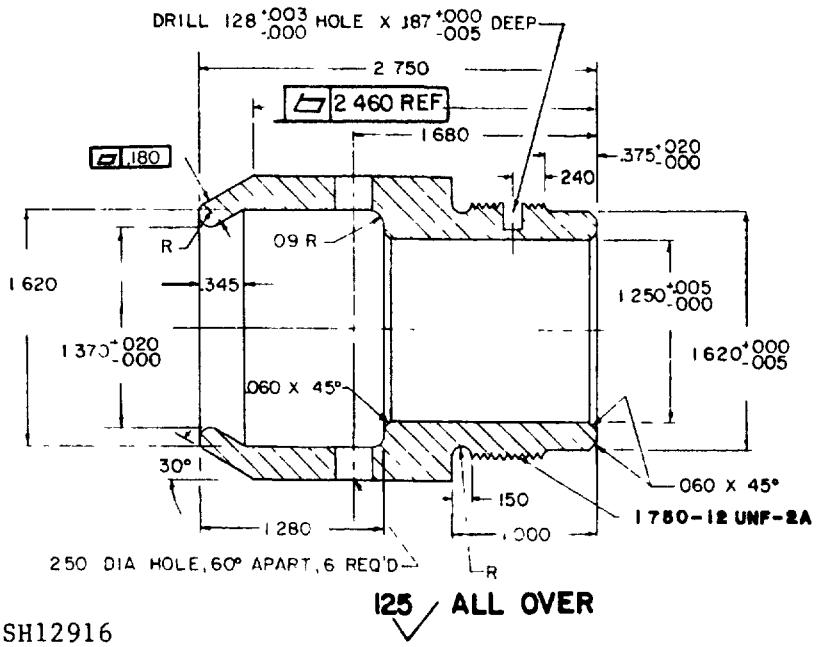


SH12916

(11) FIGURE 10. Nut, clamp.

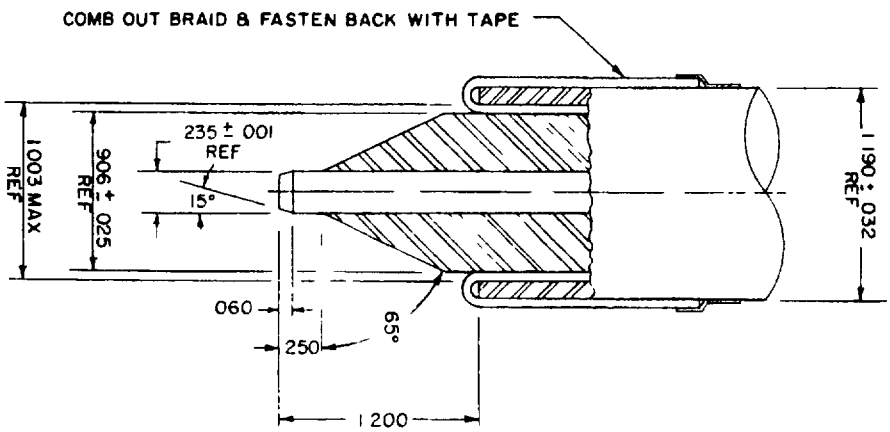

SH12917

FIGURE 11. Cable preparation (RG-296/U).

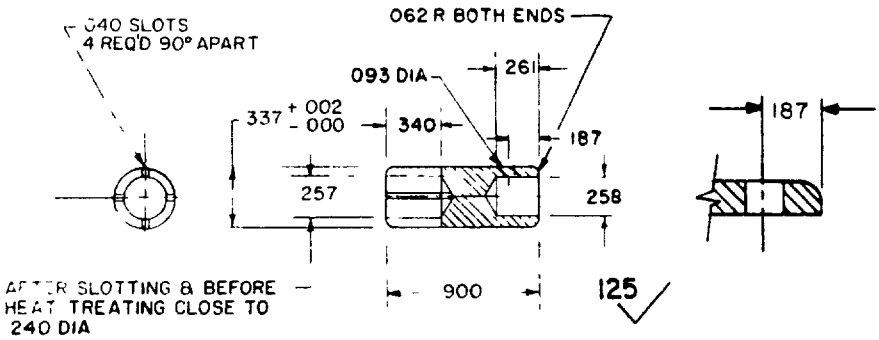

SH12918

(10) FIGURE 12. Contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body, Plug2/	2	1	NI-CU-AL Alloy, QQ-N-286, CL A, AN and AH	REB101678
02	Pellet	5	1	Nylon, L-P-410	REB101732-1
03	Washer	9	1	Teflon, Coml	REB101684-1
04	Spacer3/	6	1	CRES, ASTM A 589 COND A	REA101733
05	Nut, Spanner3/	8	1	CRES, ASTM A 582 COND A	REB101680
06	Gasket	4	1	Rubber, Synthetic, MIL-R-3065, Type S, Grade SC 515 (50 Duro)	REA101683
07	Key	7	1	NI-CU-AL Alloy, QQ-N-286, CL A, AN	REA101682
08	Braid Clamp4/	3	1	Copper, QQ-C-502, Hard Temper	REA101731
09	Back-Up Retainer	-	1	MS28774-332	-
10	Contact4/5/	12	1	Copper-Beryllium, QQ-C-530, AT	REA101685
11	Nut, Clamp3/	10	1	CRES, ASTM A 582, CL 303, COND A	REB101679
12	O-Ring	-	1	MS28775-332	-
13	Silicone Rubber	-	A/R	MIL-S-23586	-
14	Polyurethane	1	A/R	MIL-M-24041	-

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Silver plated.
3/ Passivated in accordance with QQ-P-35.
4/ Silver plated, rhodium flashed.
5/ Precipitation hardening treatment for 3 hours at 600 ± 5° or to condition at Rockwell C-31-36.

REQUIREMENTS:

1. Cable shall be prepared in accordance with figure 11 prior to assembly to plug.
2. Contact shall be soft soldered to cable.
3. Contact shall be plugged to full length with 0.250 diameter pin and the remaining cavity shall be filled with silicone rubber (item 13).
4. With nut spanner removed, shoulder of plug body shall be located 0.250 from face of mold and mold coast pro seal, or equal (plastic polyurethane no. 786).
5. After machining and finish has been completed, a lubricant in accordance with MIL-M-24041 shall be applied to a maximum thickness of 0.0003-inch to all threaded surfaces.
6. Voltage rating for test purposes - 500V dc.
7. Frequency rating - VLF/LF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

NOTES:

1. Military part number M21367/24-001.
2. All dimensions are in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-296/U cable conforms to MIL-C-17/114.

Preparing activity:
Navy - SH
(Project 5935-N196-8)

*U S GOVERNMENT PRINTING OFFICE 1985-605 036/24815

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.