MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, PLUG (JACK), TYPE UG-1423/U, FOR FLEXIBLE, SOLID-DIELECTRIC RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


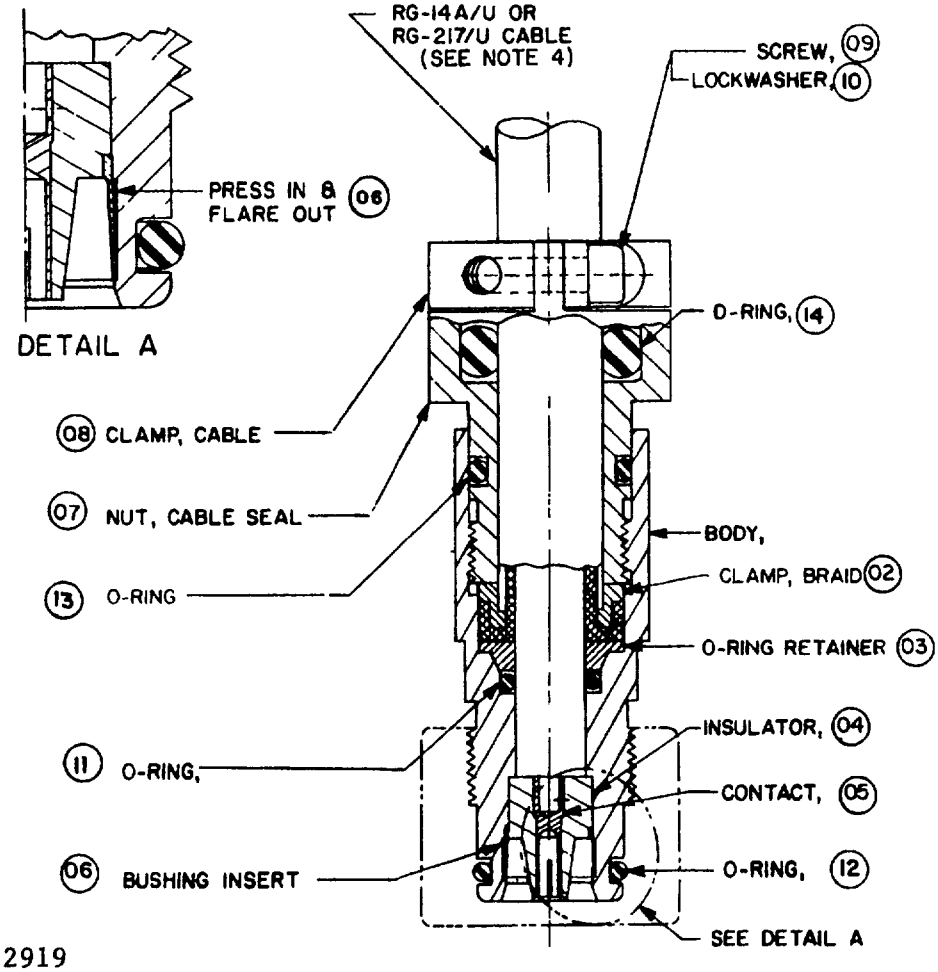


FIGURE 1. Connector, plug (jack) M21367/25-001 (UG-1423/U).

FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

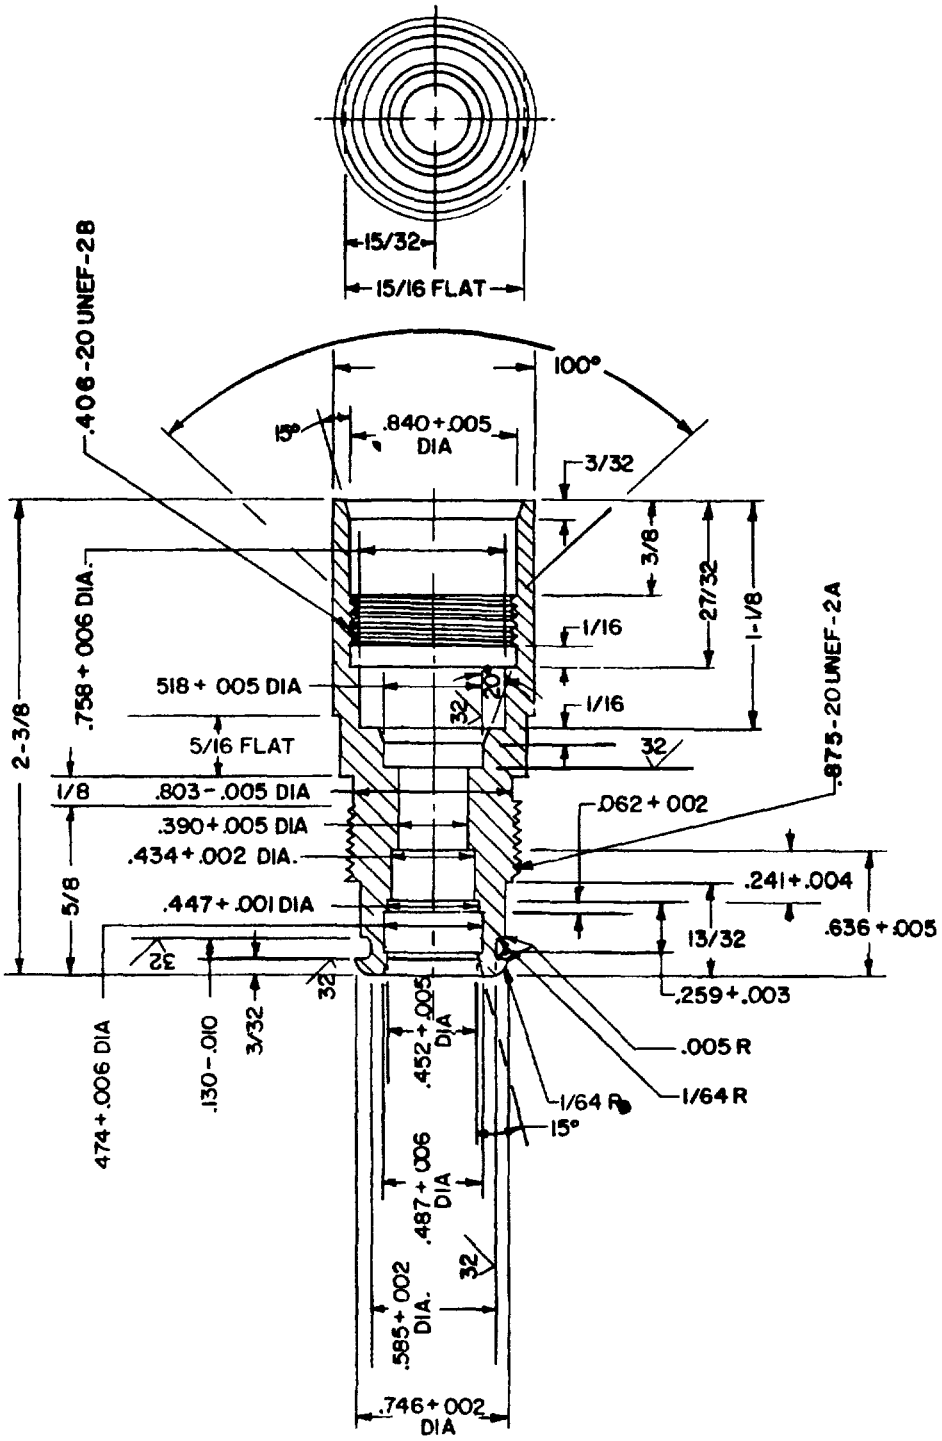

SH12920


(01) FIGURE 2. Body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

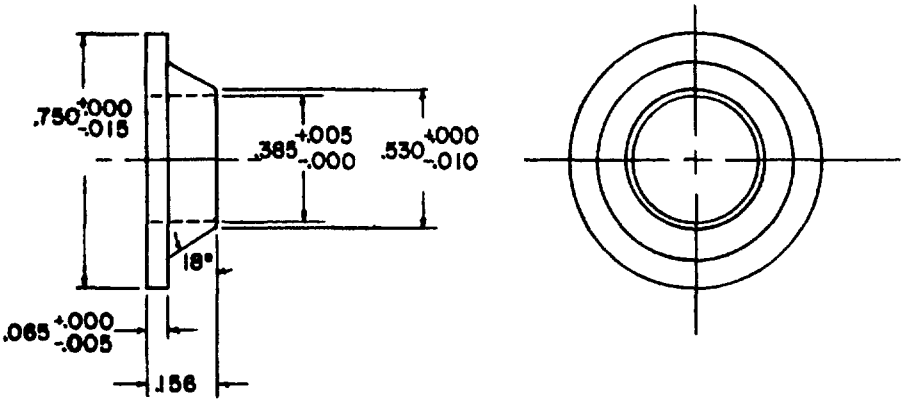

SH12921


02 FIGURE 3. Clamp, braid.

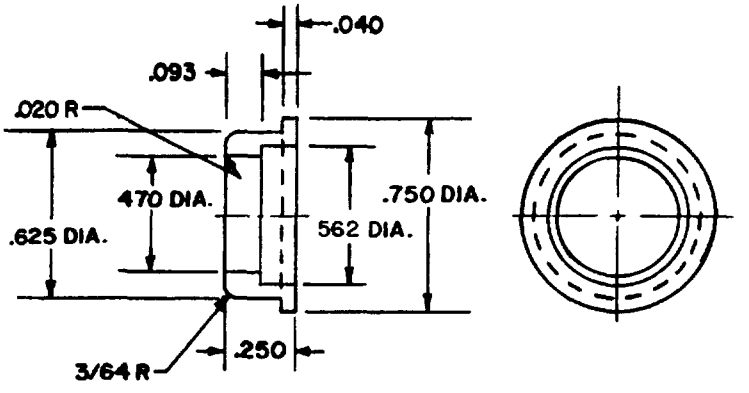

SH12922

03 FIGURE 4. Retainer, O-ring.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

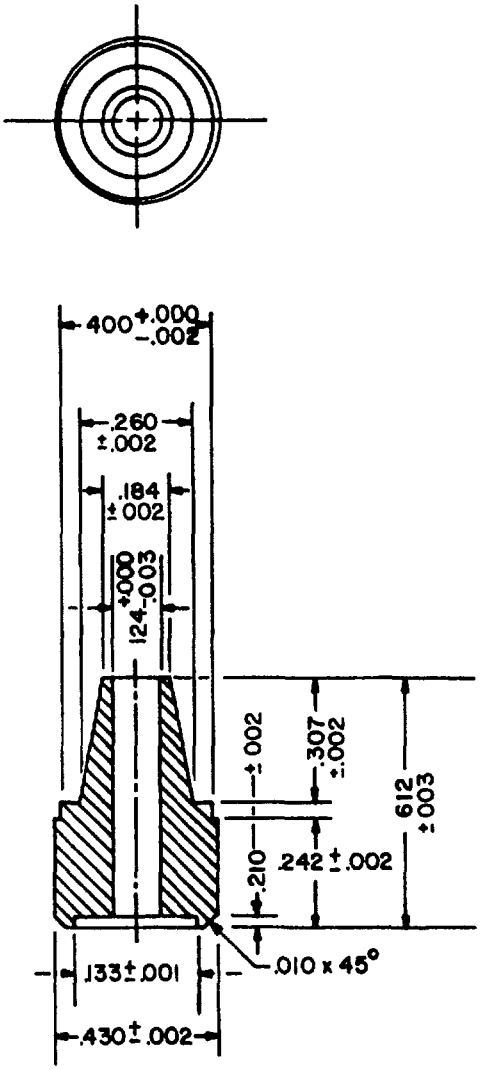

SH12923


(04) FIGURE 5. Insulator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

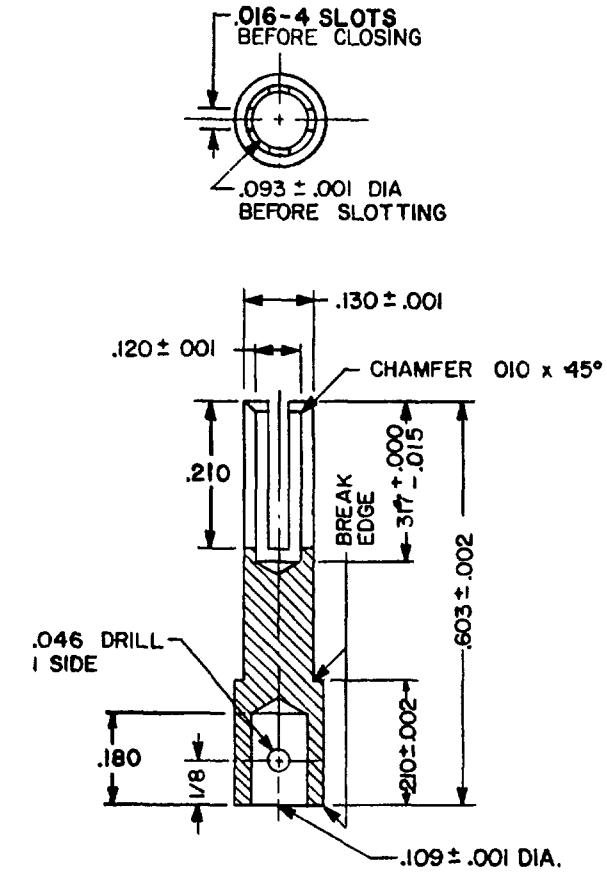

SH12924


05 FIGURE 6. Contact.

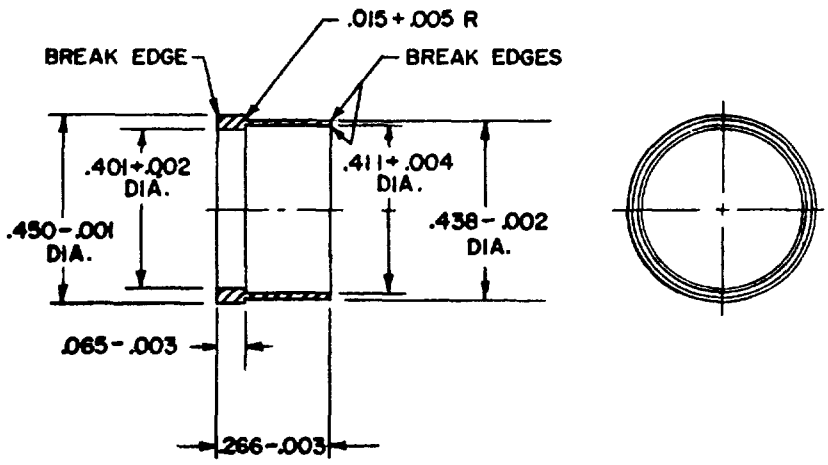


SH12925

06 FIGURE 7. Insert bushing.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

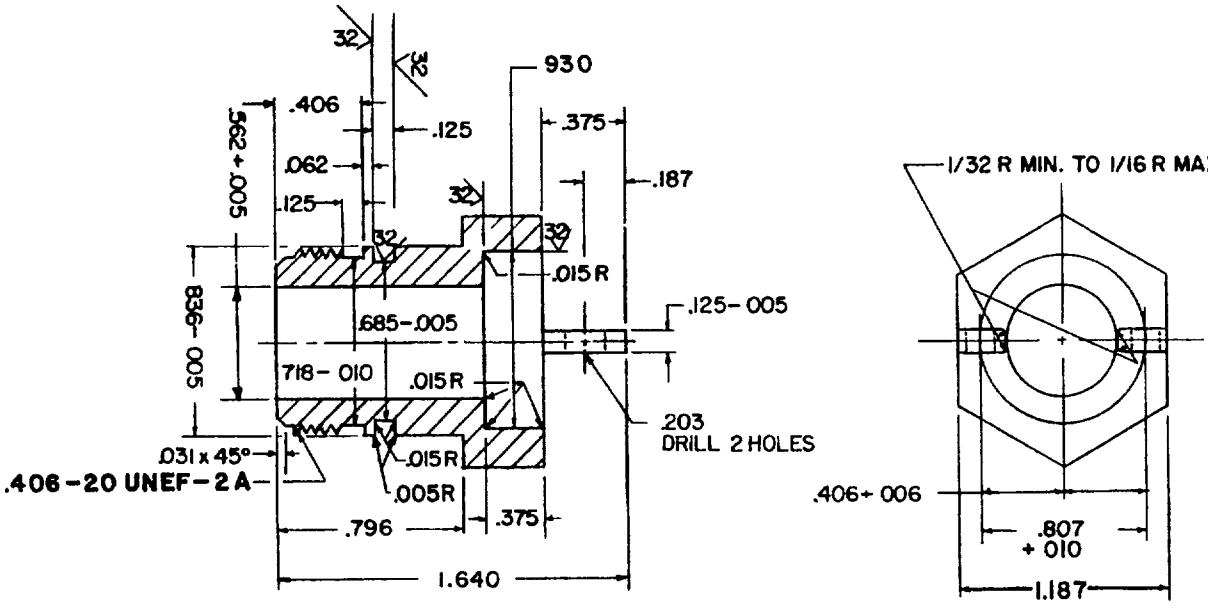


SH12926



07 FIGURE 8. Nut, cable seal.

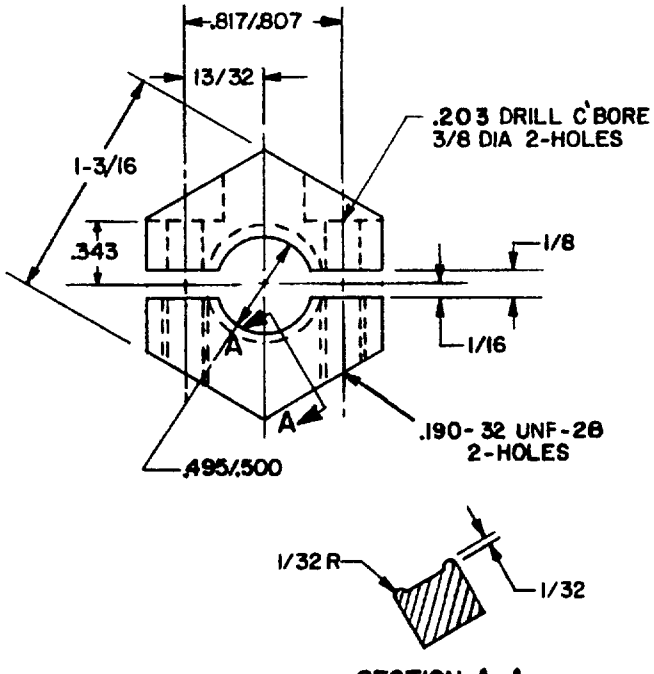

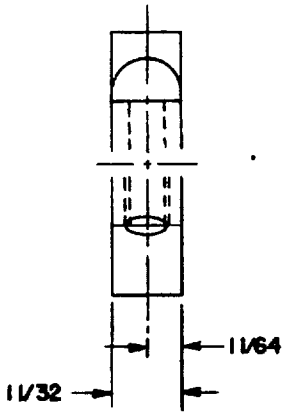

SH12927

08 FIGURE 9. Cable clamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	Brass, Naval, QQ-B-637	REB101752
02	Clamp, Braid2/	3	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REB101748
03	Retainer, O-Ring	4	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REA101433-2
04	Insulator	5	1	Teflon, Coml	REB10056-17
05	Contact2/	6	1	Copper-Beryllium, QQ-C-530, HT	REB10009-5
06	Insert Bushing2/	7	1	Brass, QQ-B-613	REB101753
07	Nut, Cable Seal	8	1	Manganese Bronze, QQ-B-728, CL A, 1/2 HD	REB101374-4
08	Clamp, Cable	9	1	Manganese Bronze, QQ-B-728, CL A, 1/2 HD	REC101840
09	Socket Head Cap Screw 0.190-32 UNF-2A x 5/8 L	-	2	CRES, Coml	-
10	Lockwasher, 0.190	-	2	CRES, Coml	-
11	O-Ring	-	1	MS28775-110	-
12	O-Ring	-	1	MS28775-113	-
13	O-Ring	-	1	MS28775-115	-
14	O-Ring	-	1	REA10083-16	-

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Silver plated.

REQUIREMENTS:

1. Voltage rating for test purposes - 500V dc.
2. Frequency rating - VLF/LF.

NOTES:

1. Military part number M21367/25-001.
2. All dimensions are in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-14A/U cable conforms to MIL-C-23020/6 and type RG-217/U conforms to MIL-C-17/78.

Preparing activity:
Navy - SH
(Project 5935-N196-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.