MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, PLUG TYPE UG-1424/U FOR FLEXIBLE, SOLID-DIELECTRIC RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


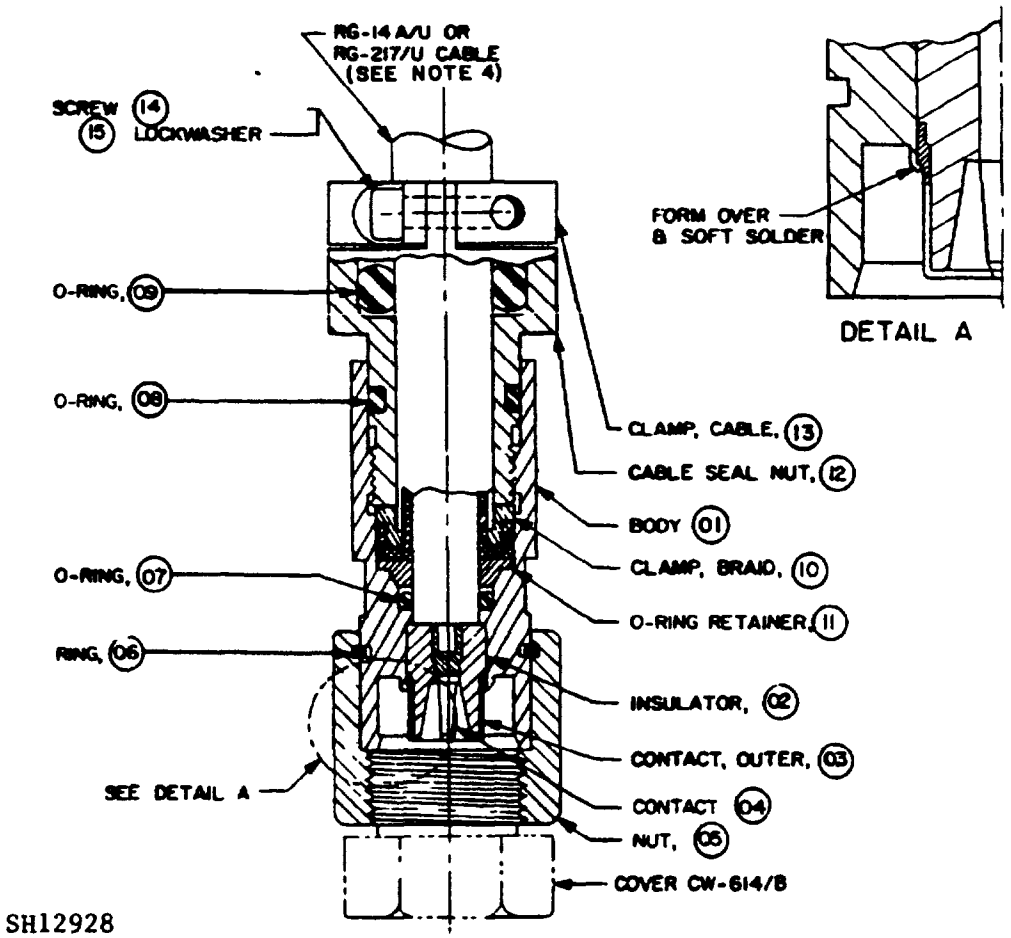


FIGURE 1. Connector, plug, M21367/26-001 (UG-1424/U).

FSC 5935


DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

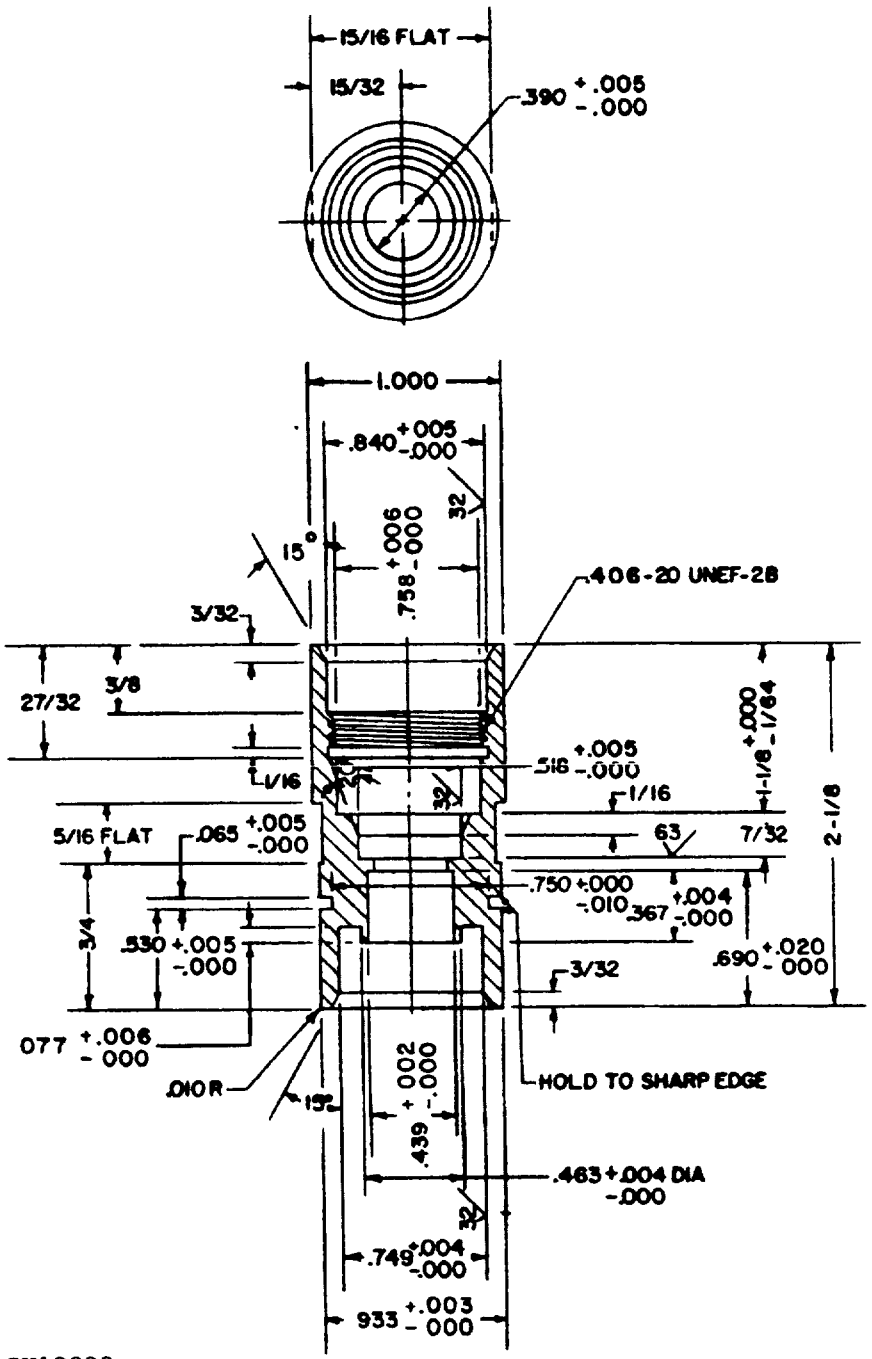


(01) FIGURE 2. Body.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

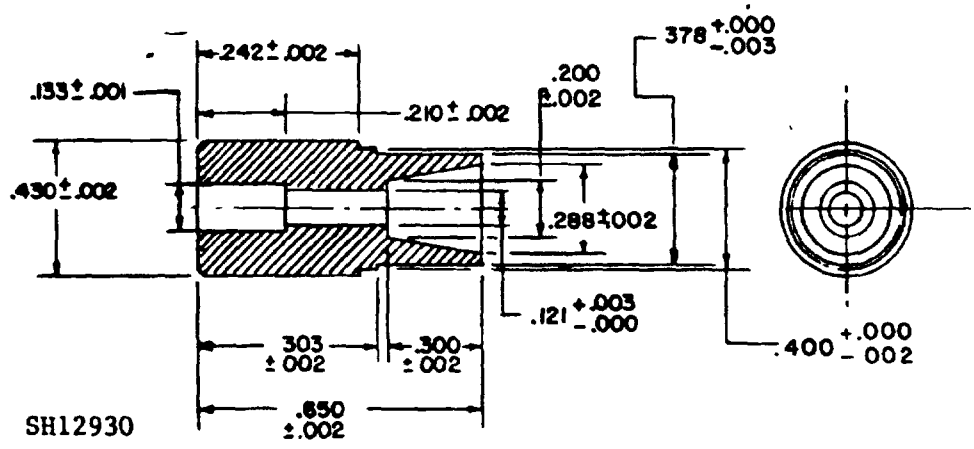

02 FIGURE 3. Insulator.

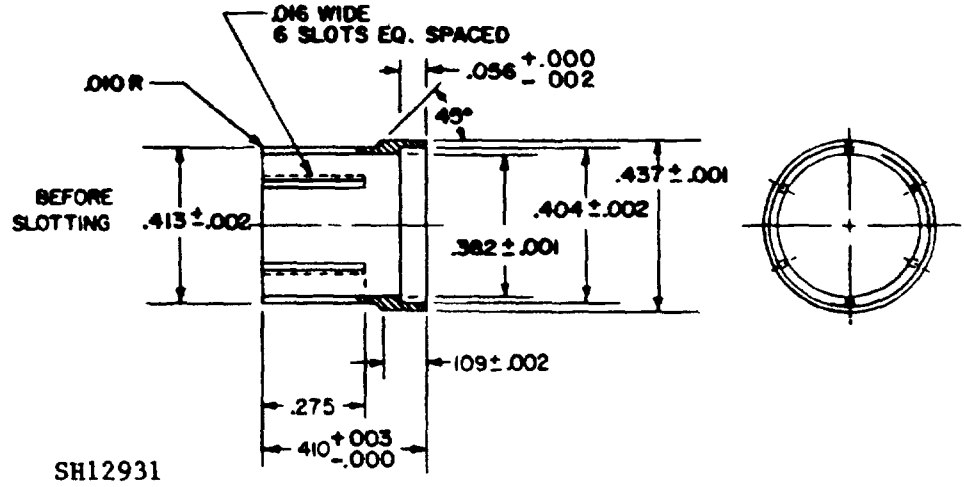


03 FIGURE 4. Outer contact.

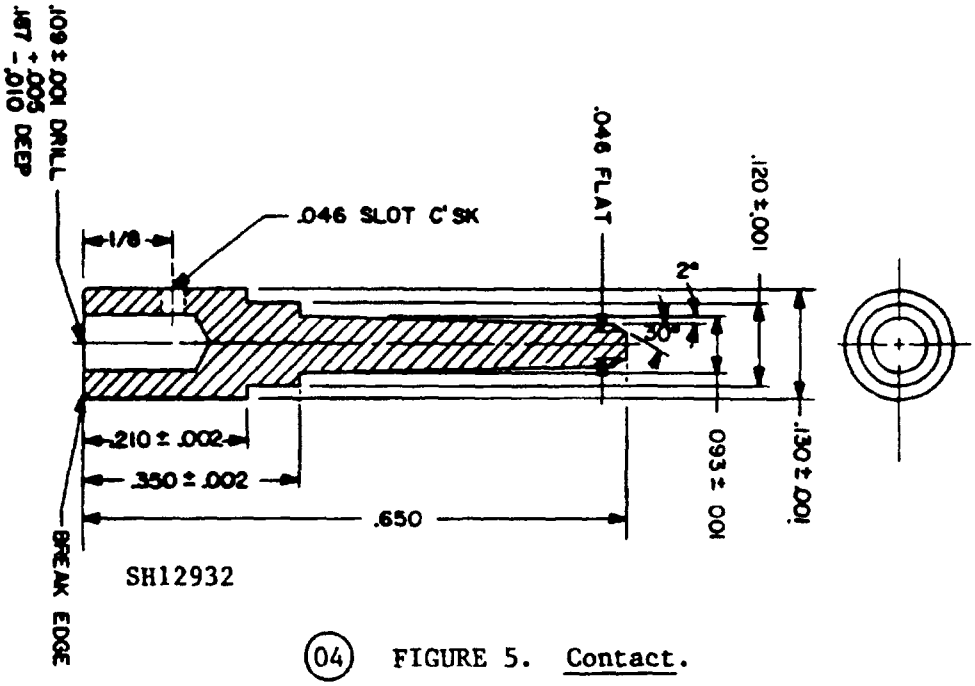


04 FIGURE 5. Contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

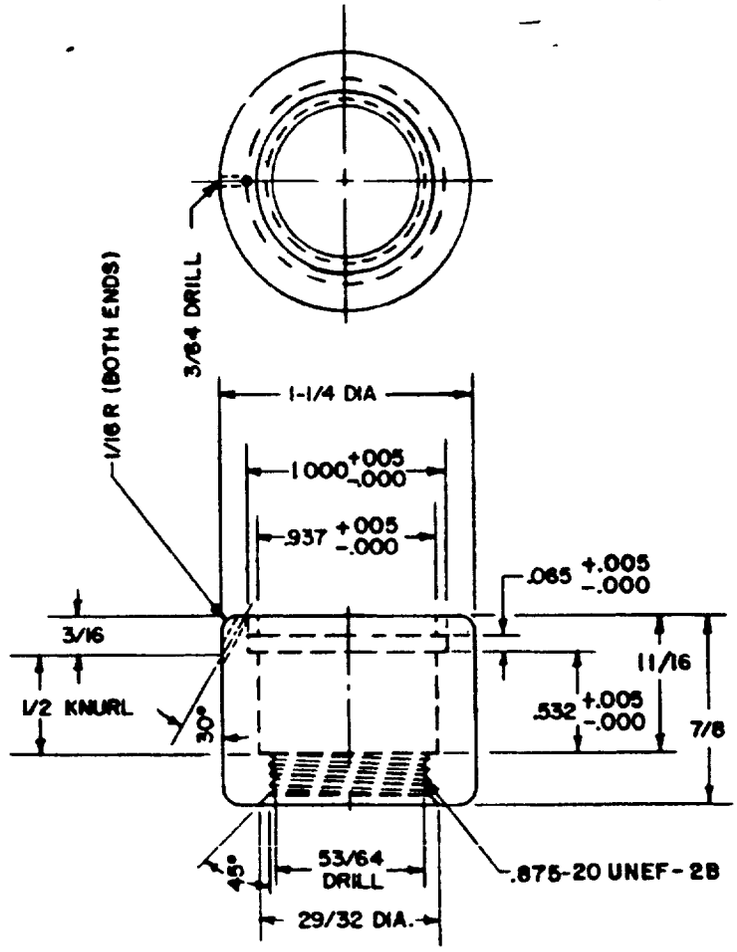

SH12933

(05) FIGURE 6. Nut.

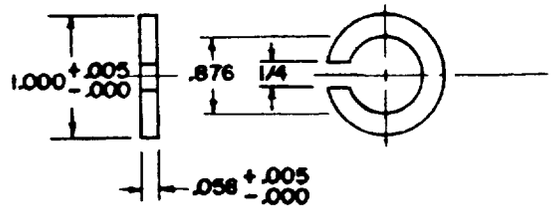

SH12934

(06) FIGURE 7. Ring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body2/	2	1	Brass, Naval, QQ-B-637	REB101749
02	Insulator	3	1	Teflon, Coml	REB10057-10
03	Contact, Outer2/	4	1	Copper-Beryllium, QQ-C-530, HT	REB101751
04	Contact2/	5	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REB10014-5
05	Nut2/	6	1	Brass, Naval, QQ-B-637	REB101750
06	Ring	7	1	Phosophor Bronze, COMP A, Spring Temper QQ-B-750	REA10041-6
07	O-Ring	-	1	MS28775-110	-
08	O-Ring	-	1	MS28775-115	-
09	O-Ring	0	1	REA10083-16	-
10	Clamp, Braid2/	-	1	MIL-H-21367/25, Fig. 3	-
11	Retainer, O-Ring	-	1	MIL-H-21367/25, Fig. 4	-
12	Nut, Cable Seal	-	1	MIL-H-21367/25, Fig. 8	-
13	Clamp, Cable	-	1	MIL-H-21367/25, Fig. 9	-
14	Socket Head Cap Screw 0.190-32 UNF-2A x 5/8 L	-	2	CRES, Coml	-
15	Lockwasher, 0.190	-	2	CRES, Coml	-

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Silver plates.

REQUIREMENTS:

1. Voltage rating for test purposes - 500V dc.
2. Frequency rating - VLF/LF.

NOTES:

1. Military part number M21367/26-001.
2. All dimensions are in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-14A/U cable conforms to MIL-C-23020/6 and type RG-217/U conforms to MIL-C-17/78.

Preparing activity:
Navy - SH
(Project 5935-N196-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.