MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, RECEPTACLE, TYPE UG-1439/U, FOR FLEXIBLE, SOLID-DIELECTRIC RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


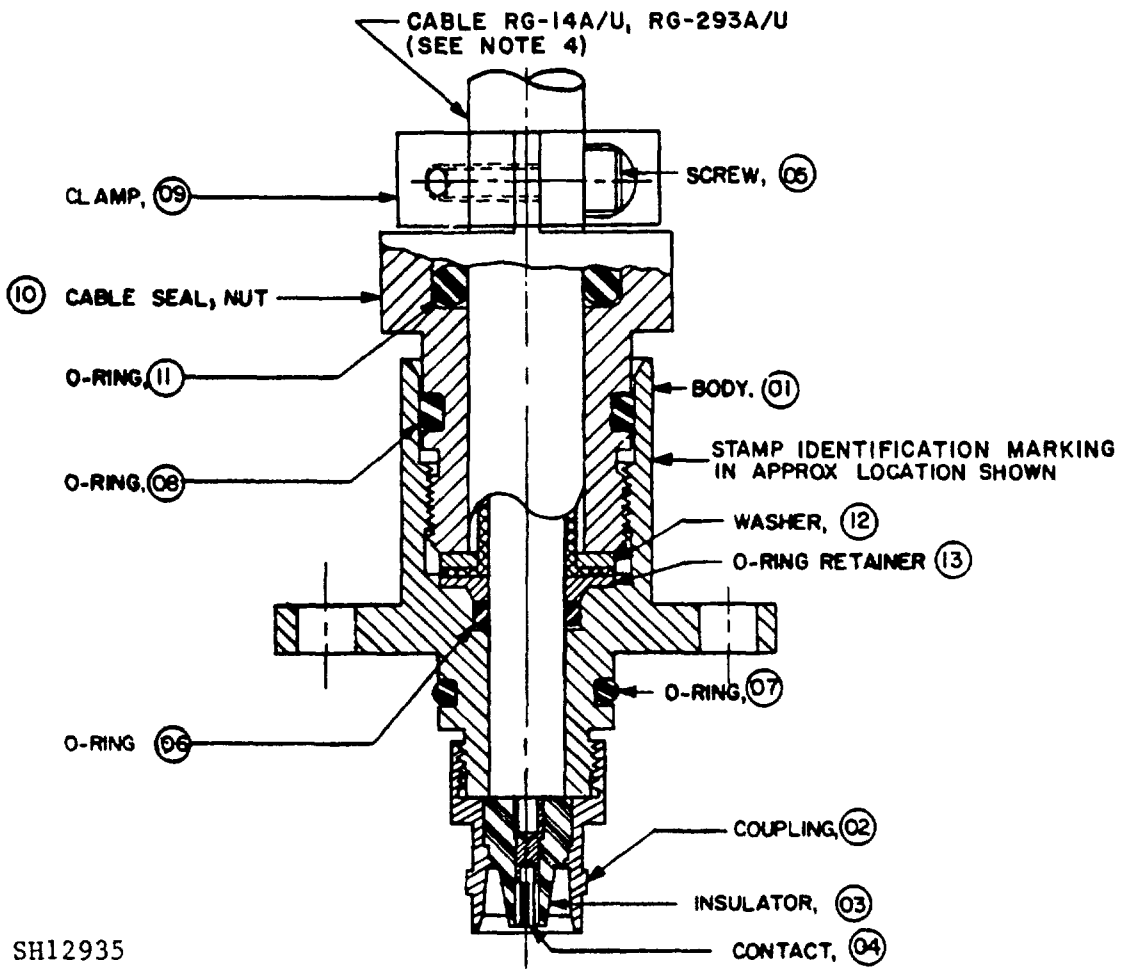


FIGURE 1. Connector, receptacle, M21367/27-001 (type UG-1439/U).

FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

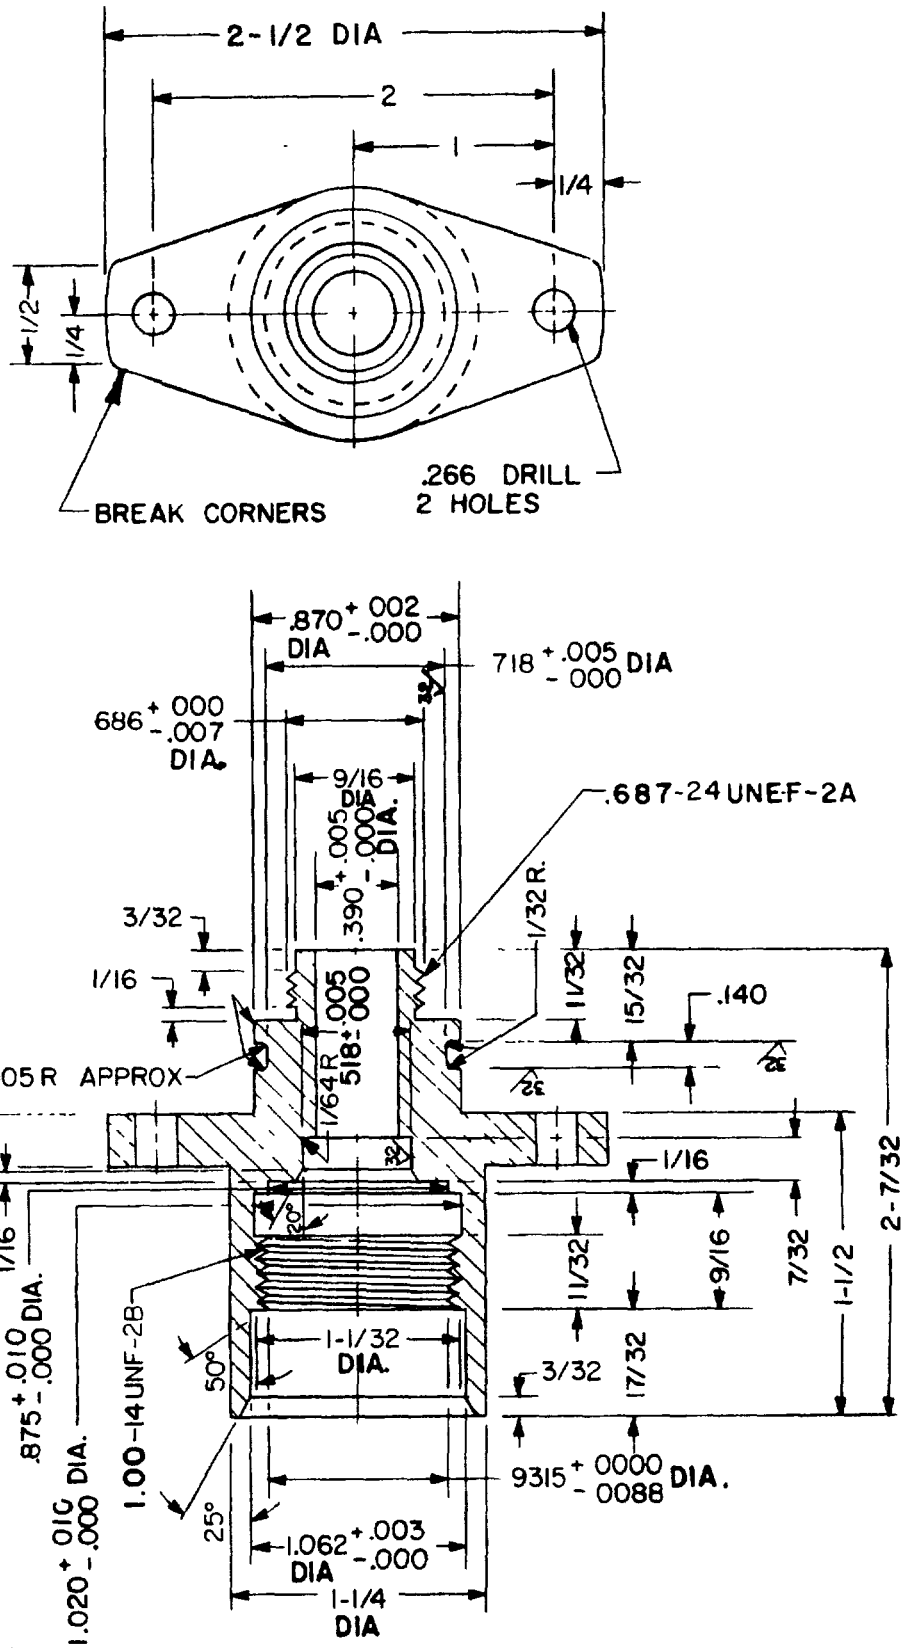

SH12936

(01) FIGURE 2. Body.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

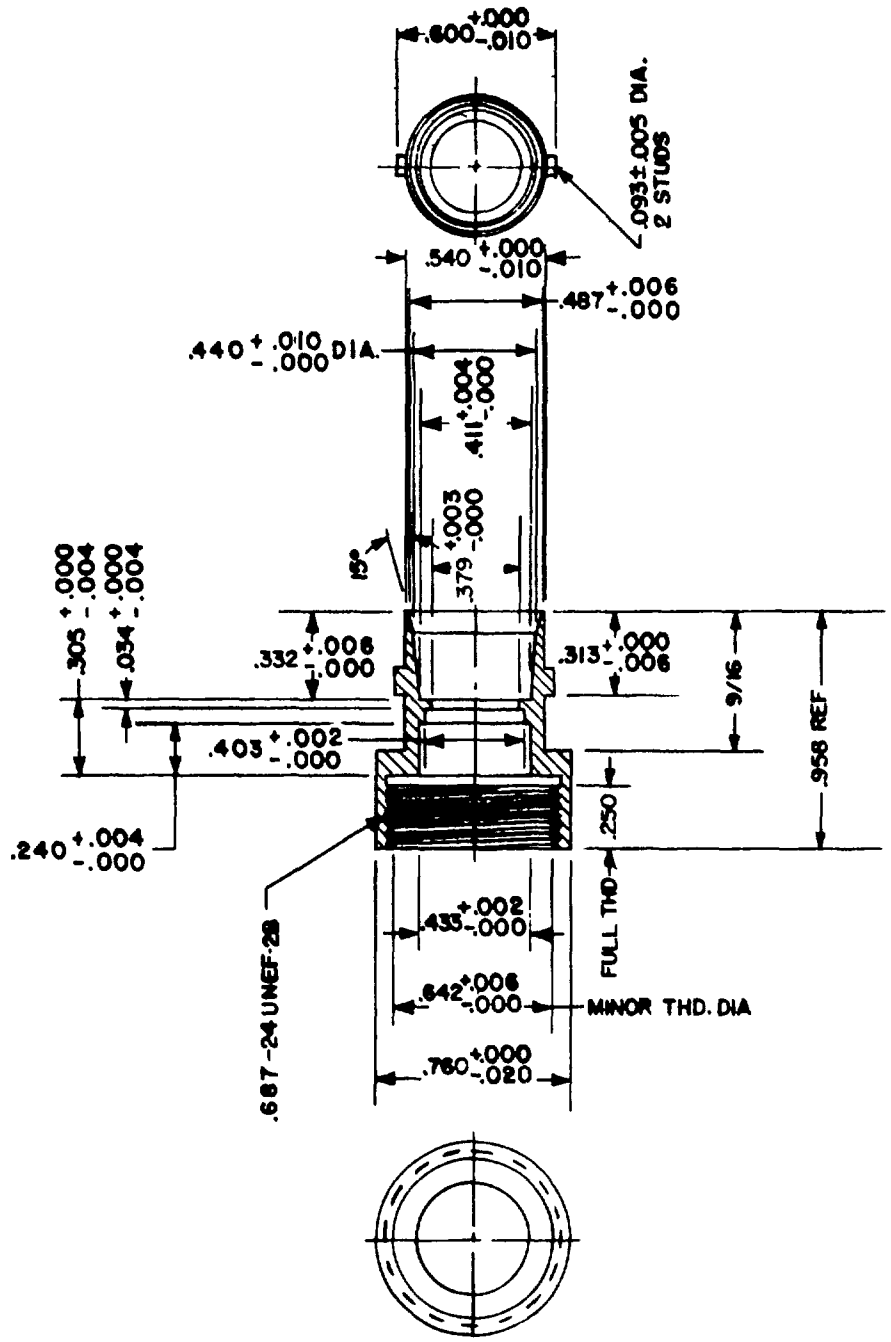

SH12937

02 FIGURE 3. Coupling.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

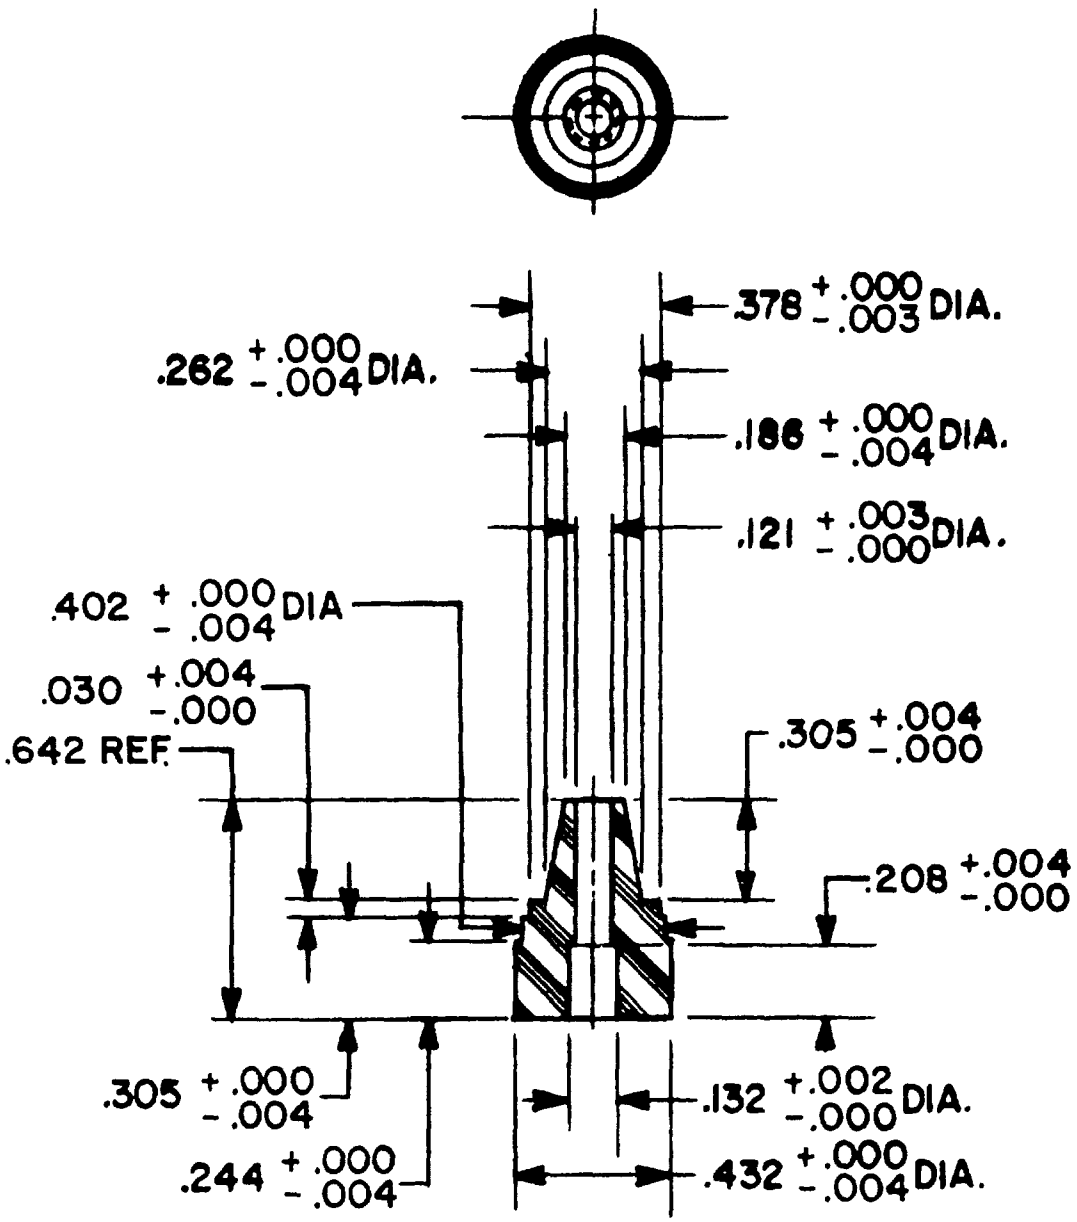

SH12938

(03) FIGURE 4. Insulator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

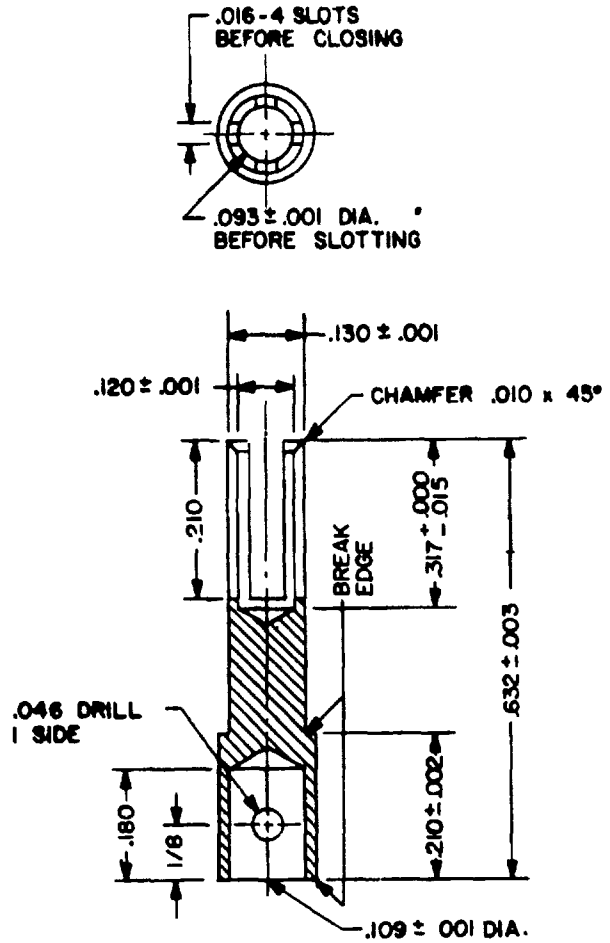

SH12939

(04) FIGURE 5. Contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	CRES Steel, QQ-S-766, Class 304	REC101754-2
02	Coupling2/	3	1	Brass, QQ-B-626, Alloy 360, 1/2 HD	REB101755
03	Insulator	4	1	Teflon, Coml	REB101756
04	Contact2/	5	1	Copper-Beryllium, QQ-C-530, HT	REB10009-6
05	Socket Head Machine Screw 0.190-32 UNF-2A x 3/4 L	-	2	CRES, Coml	-
06	O-Ring	-	1	MS28775-110	-
07	O-Ring	-	1	MS28775-115	-
08	O-Ring	-	1	MS28775-211	-
09	Clamp	-	1	MIL-H-21367/1, Fig. 4	-
10	Nut, Cable Seal	-	1	MIL-H-21367/1, Fig. 5	-
11	O-Ring	-	1	REA10083-16	-
12	Washer	-	1	MIL-H-21367/1, Fig. 6	-
13	Retainer, O-Ring	-	1	MIL-H-21367/1, Fig. 12	-

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Silver plates.

REQUIREMENTS:

1. Voltage rating for test purposes - 500V dc.
2. Frequency rating - VLF/LF.

NOTES:

1. Military part number M21367/27-001.
2. All dimensions are in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-14A/U cable conforms to MIL-C-23020/6 and type RG-293A/U conforms to MIL-C-23020/1.

Preparing activity:
Navy - SH
(Project 5935-N196-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.