MIL-H-21367/28(SH)
18 October 1985
SUPERSEDING
REB49428A
22 March 1963

MILITARY SPECIFICATION SHEET

HULL FITTING, CONNECTOR, RECEPTACLE, TYPE UG-1495/U, FOR FLEXIBLE, SOLID-DIELECTRIC RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).

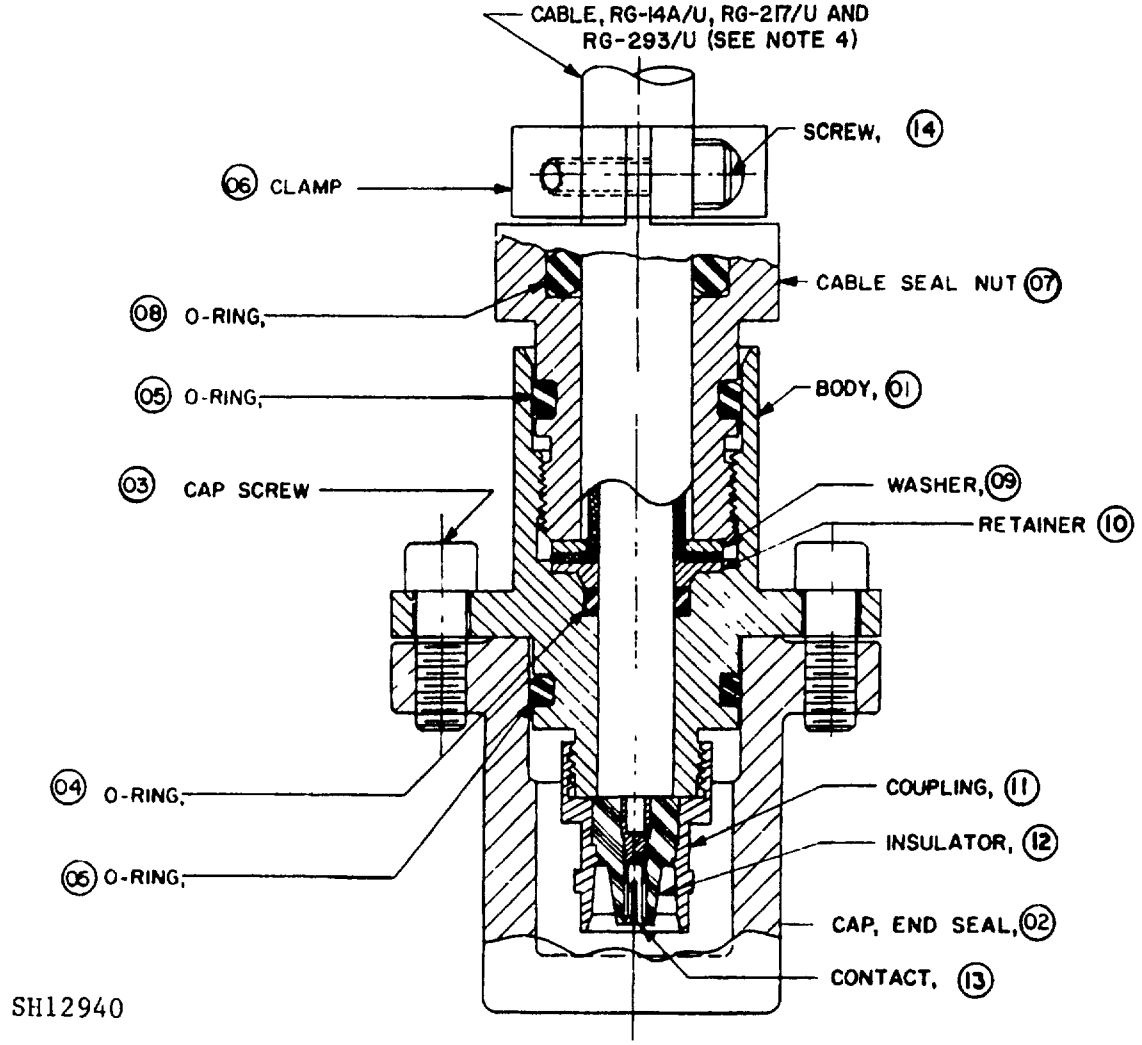


FIGURE 1. Connector, receptacle, M21367/28-001 (UG-1495/U).

FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.


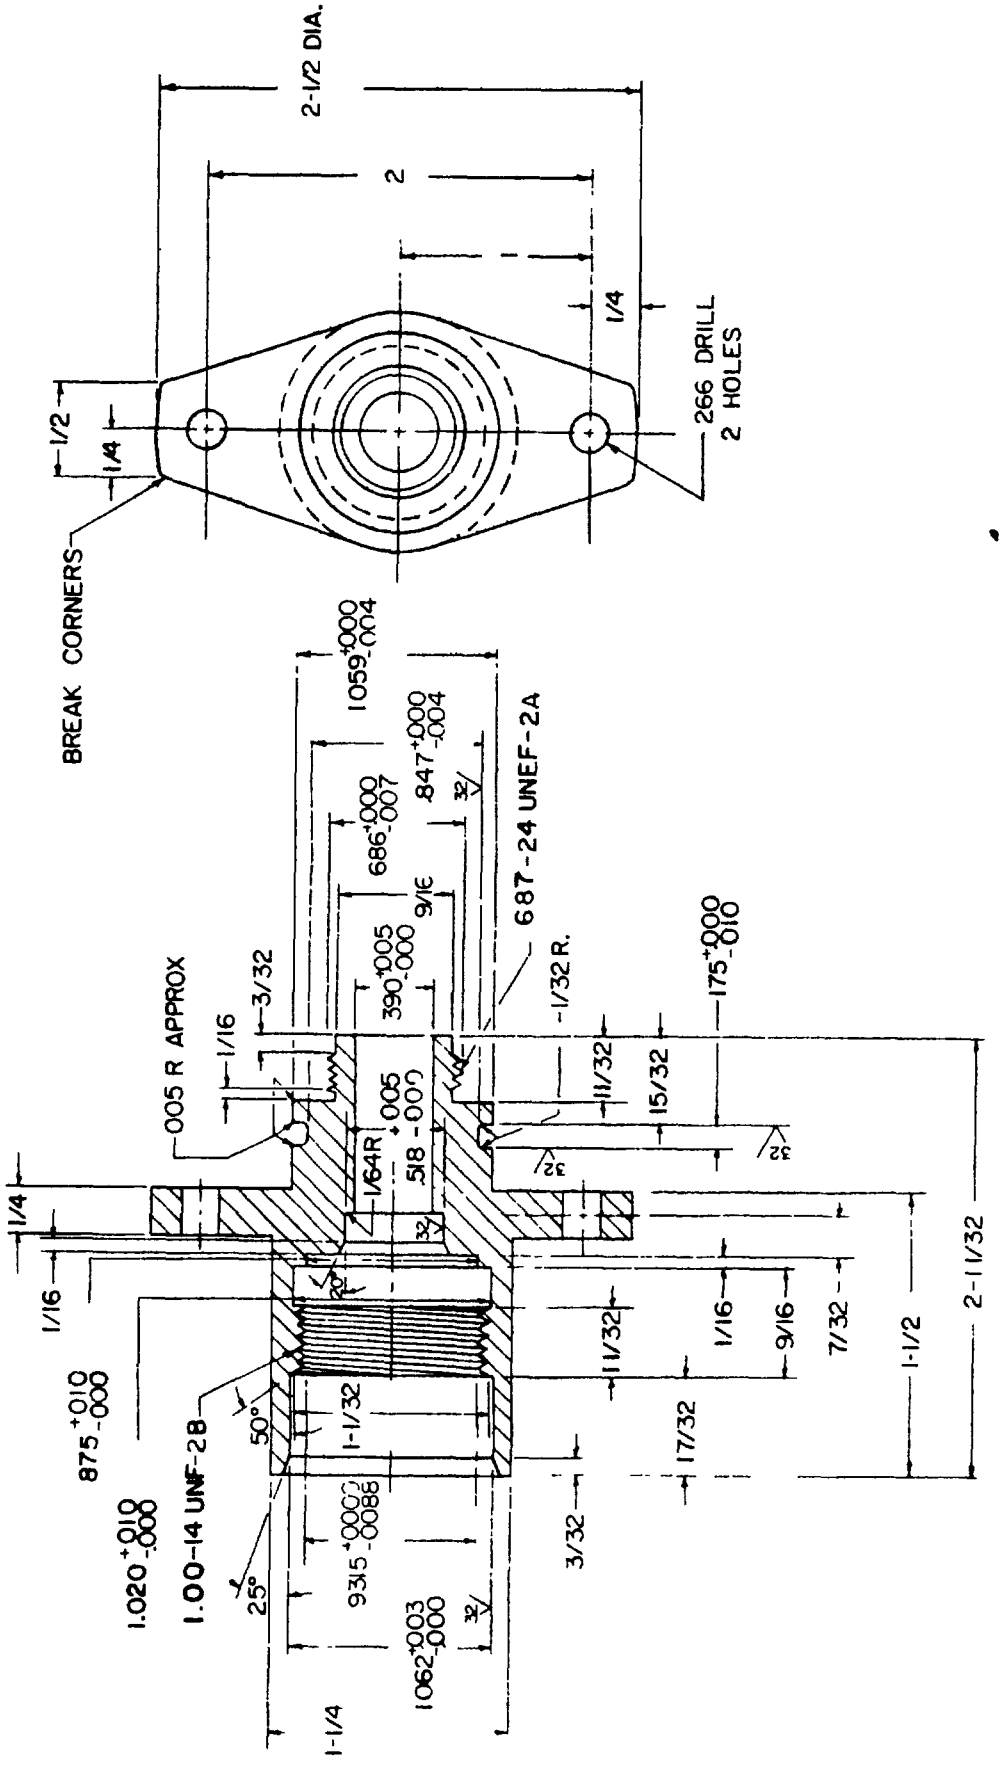


FIGURE 2. Body.

SH12941

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

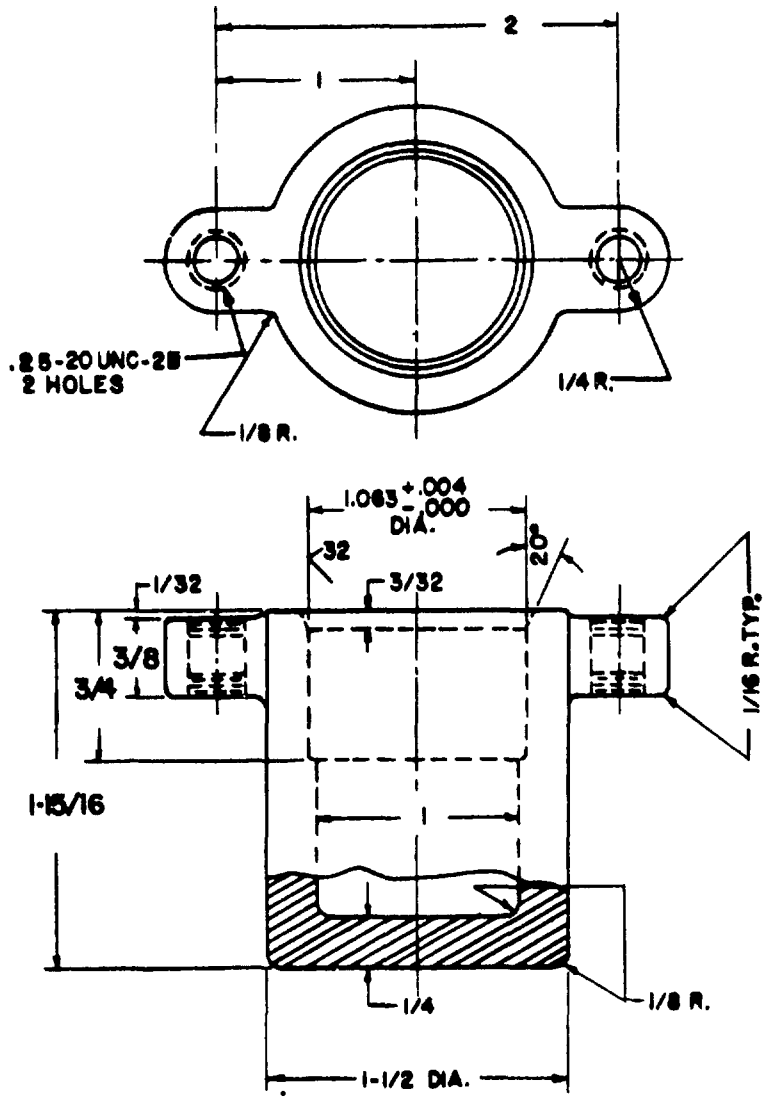

SH12942

02 FIGURE 3. Cap end seal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	CRES, QQ-S-766, Class 304	REC101754-1
02	Cap End Seal	3	1	CRES, Casting, MIL-S-867 CL 1	REB101775
03	Socket Head Cap Screw 0.250 20 UNC-2A x 3/4 L	-	2	CRES, Coml	-
04	O-Ring	-	1	MS28775-110	-
05	O-Ring	-	2	MS28775-211	-
06	Clamp	-	1	MIL-H-21367/1, Fig. 4	-
07	Nut, Cable Seal	-	1	MIL-H-21367/1, Fig. 5	-
08	O-Ring	-	1	REA10083-16	-
09	Washer	-	1	MIL-H-21367/1, Fig. 6	-
10	Retainer	-	1	MIL-H-21367/1, Fig. 12	-
11	Coupling2/	-	1	MIL-H-21367/27, Fig. 3	-
12	Insulator	-	1	MIL-H-21367/27, Fig. 4	-
13	Contact2/	-	1	MIL-H-21367/27, Fig. 5	-
14	Socket Head Machine Screw 0.190-32 UNF-2A x 3/4 L	-	2	CRES, Coml	-

1/ Item numbers are the same as numbers shown in circles on figures.
2/ Silver plates.

REQUIREMENTS:

1. Voltage rating for test purposes - 500V dc.
2. Frequency rating - VLF/LF.

NOTES:

1. Military part number M21367/28-001.
2. All dimensions are in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-14A/U cable conforms to MIL-C-23020/6 and type RG-217/U cable conforms to MIL-C-17/78.

Preparing activity:
Navy - SH
(Project 5935-N196-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:26Z
Check the source to verify that this is the current version before use.