
MILITARY SPECIFICATION SHEET

HULL FITTING, STUFFING TUBE, TYPE MX8210/U, FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the stuffing tube described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).

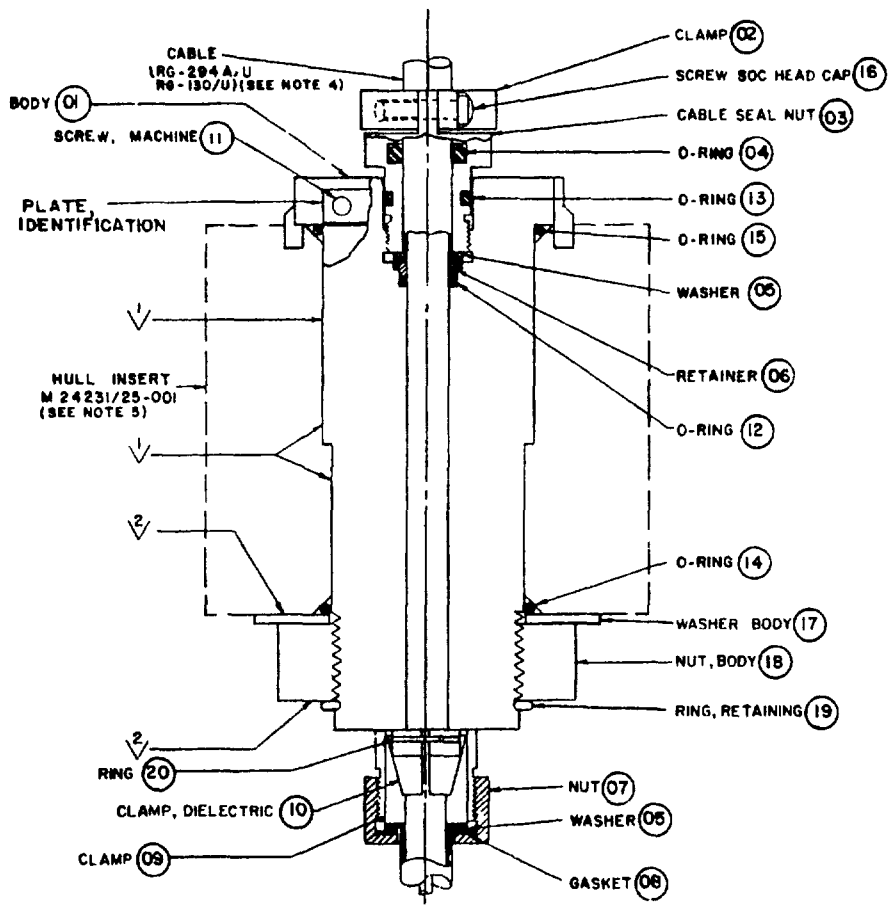

SH12801


1/ BRINELL HARDNESS READING SHALL BE TAKEN AT THESE POINTS
2/ BRINELL HARDNESS READING SHALL BE TAKEN AT THESE FACES AT 120-DEGREE INTERVALS

FIGURE 1. Assembly M21367/3-001 (MX8210/U).

FSC 5975

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

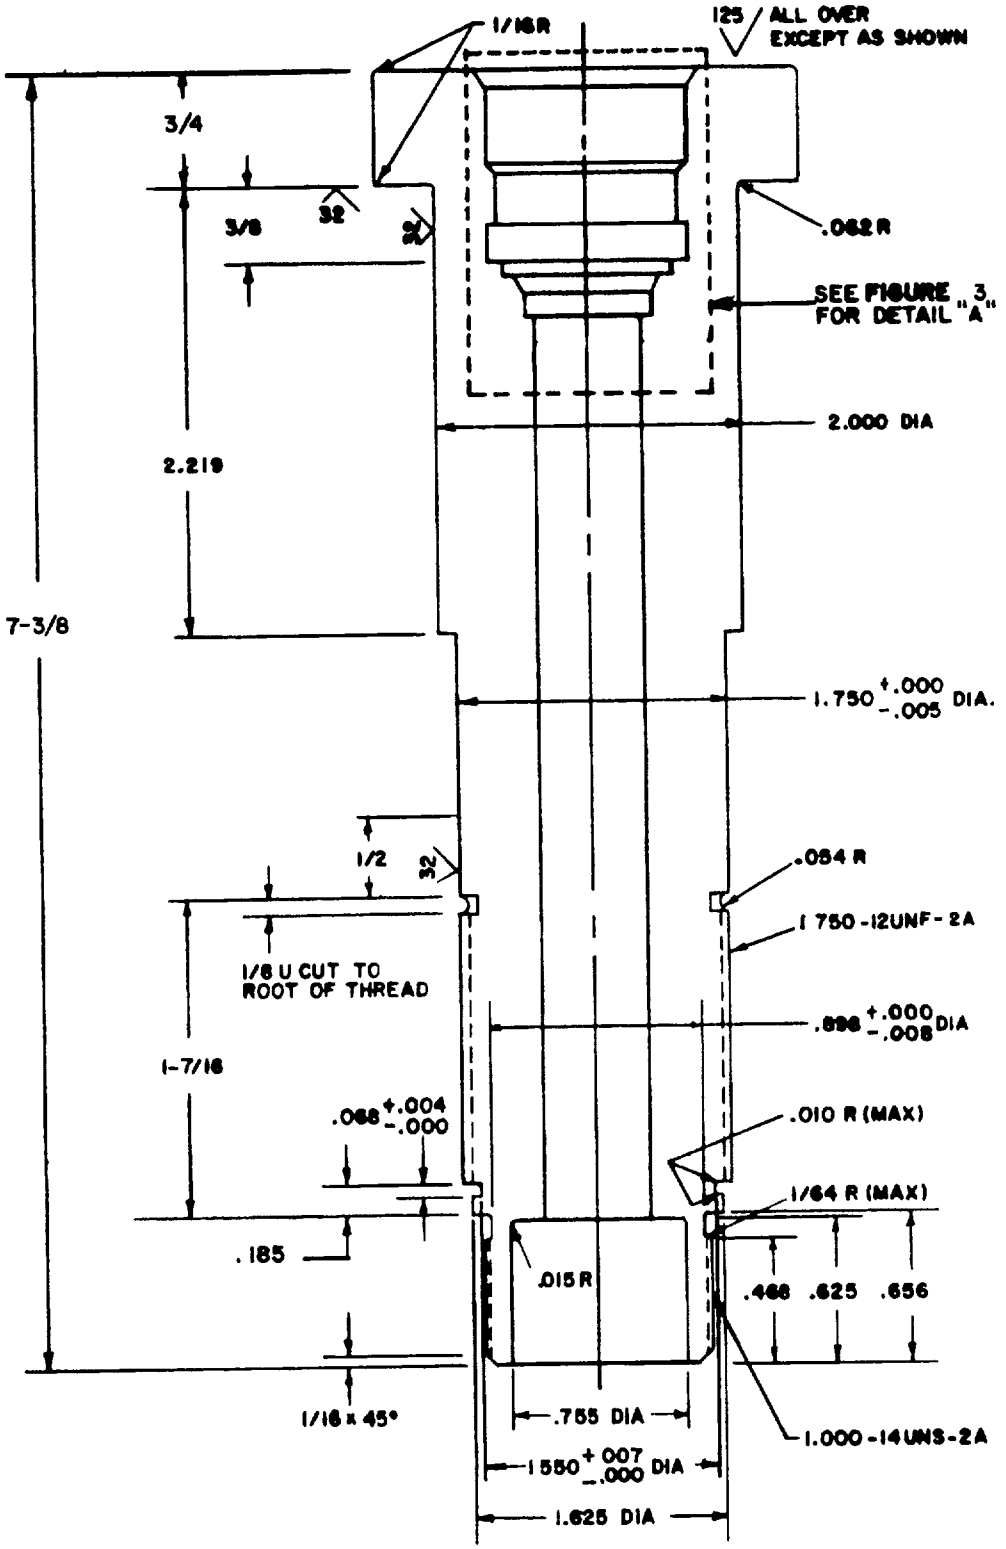

SH12802

(01) FIGURE 2. Body.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

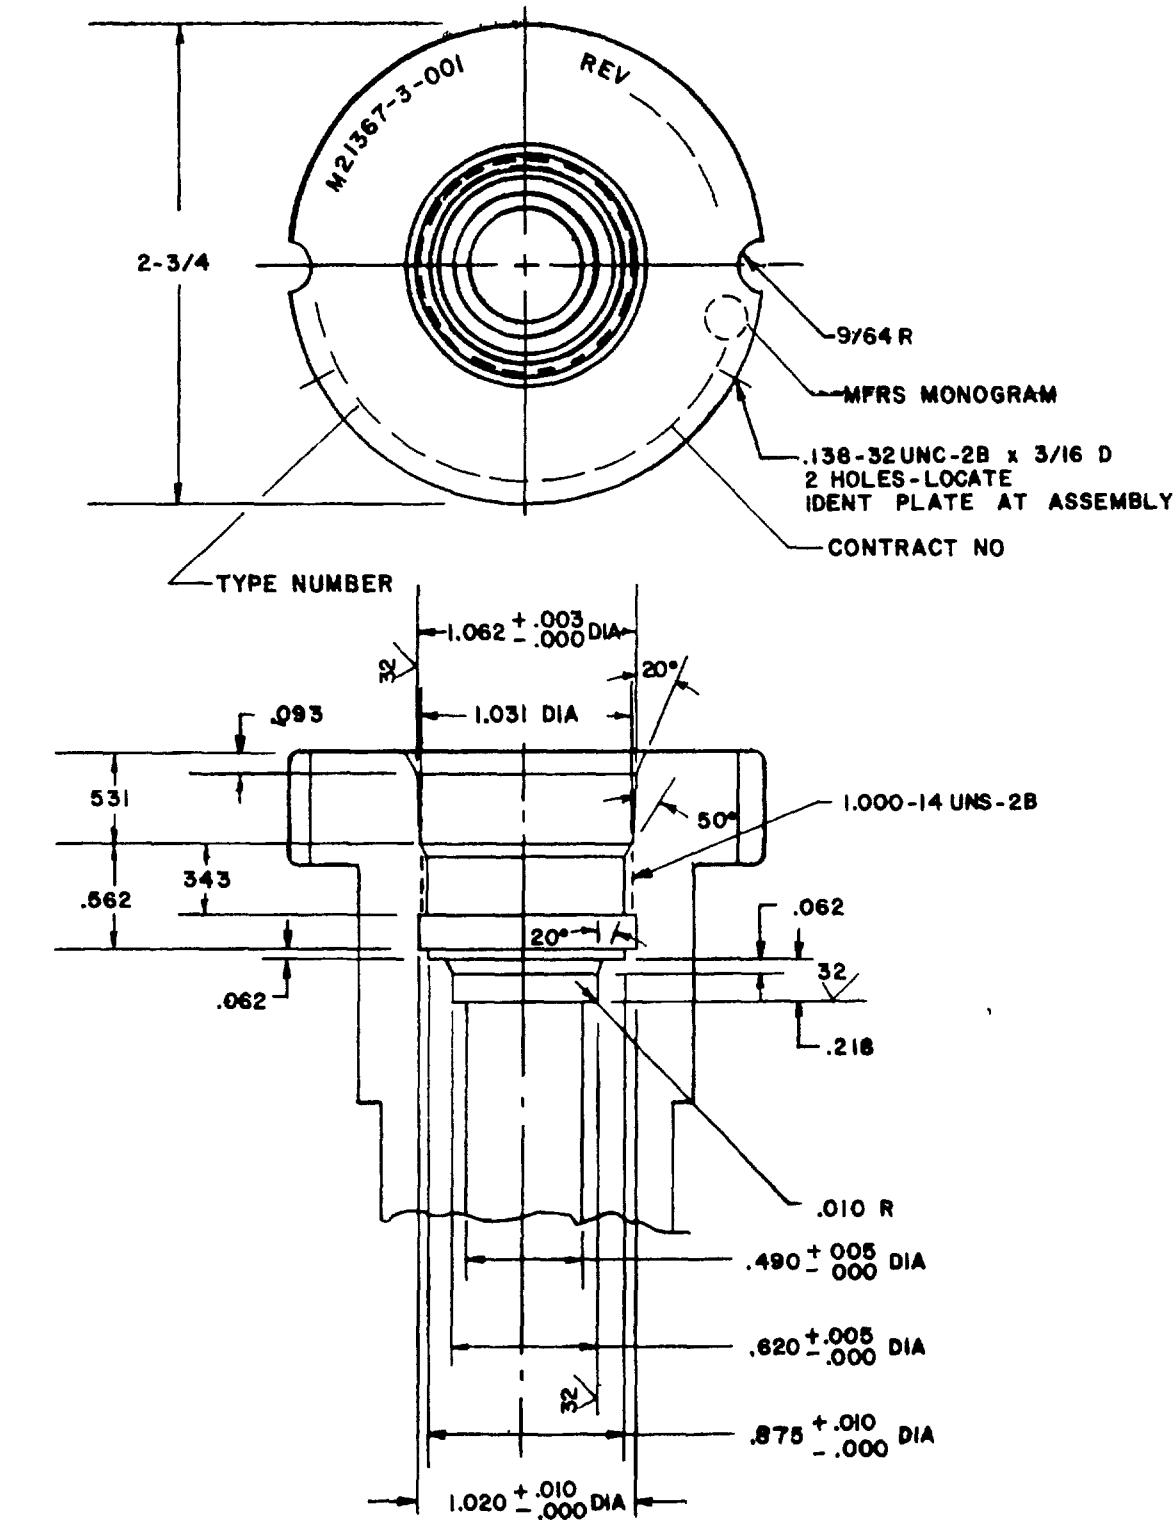

SH12803


FIGURE 3. Body (detail A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

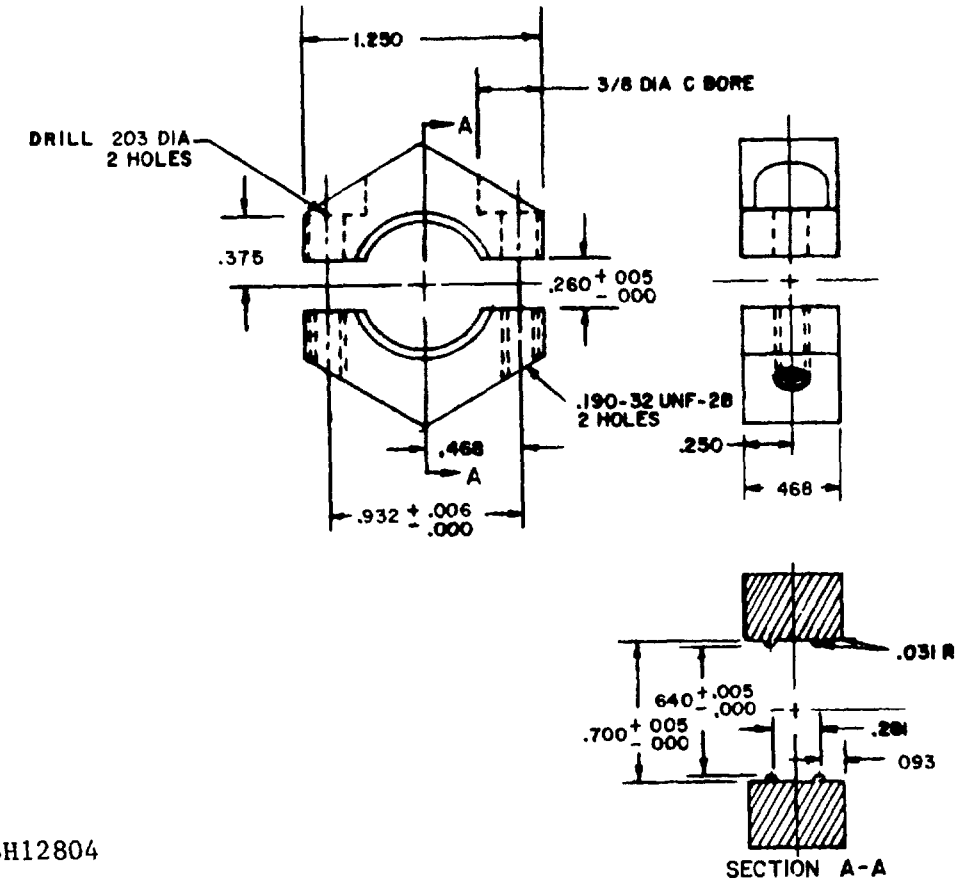

SH12804


02 FIGURE 4. Clamp.

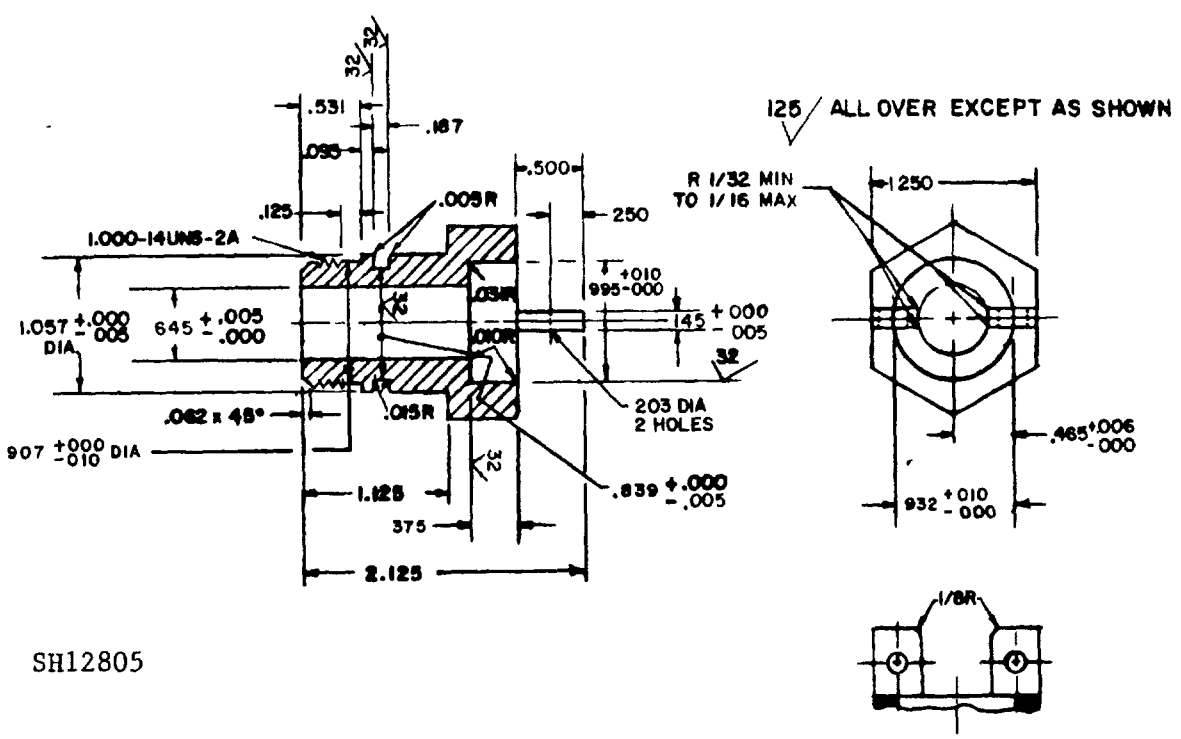

SH12805


03 FIGURE 5. Cable seal nut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

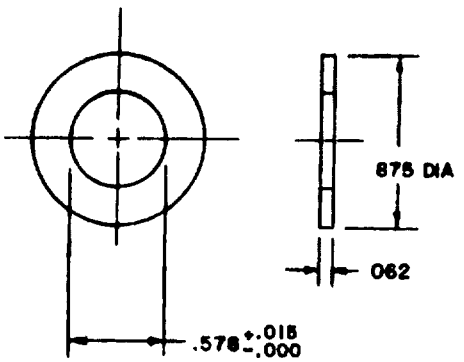


SH12806

05 FIGURE 6. Washer.

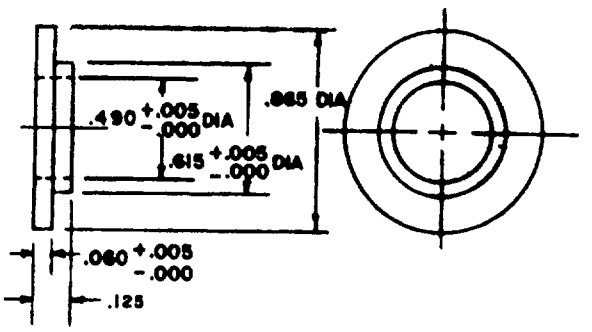


SH12807

06 FIGURE 7. Retainer.

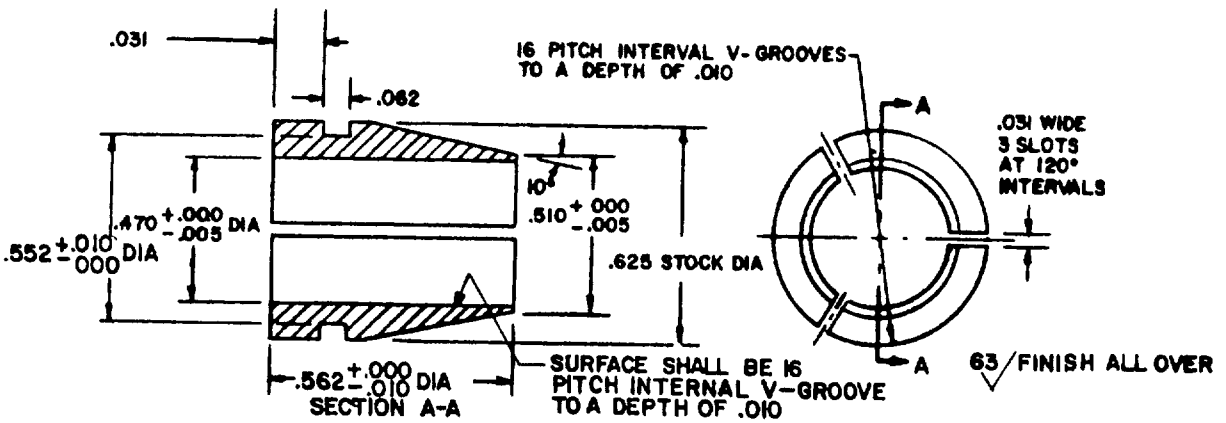

SH12808


10 FIGURE 8. Dielectric clamp.

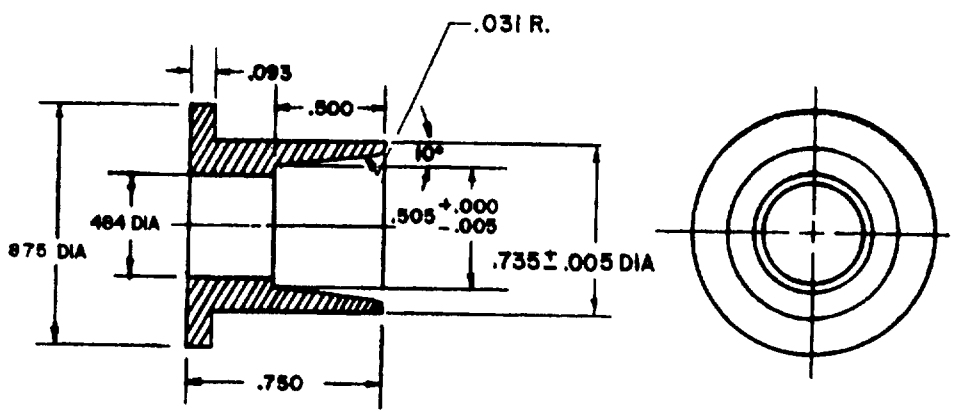

SH12809


09 FIGURE 9. Clamp.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

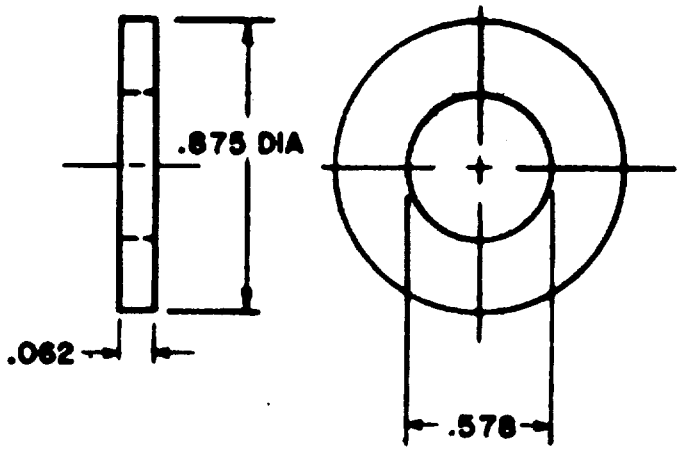

SH12810

08 FIGURE 10. Gasket.

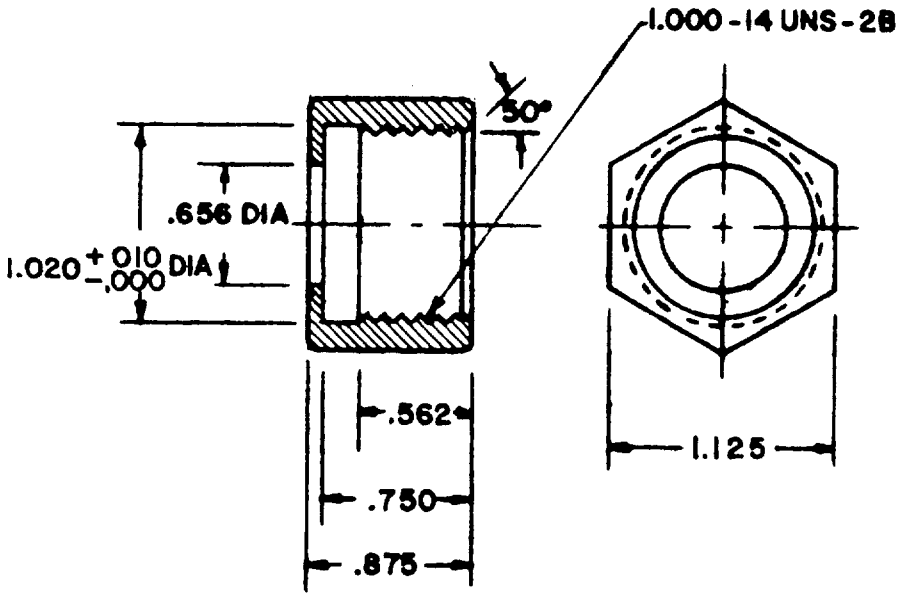

SH12811

07 FIGURE 11. Nut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	NI-CU-AL Alloy, QQ-N-286 CL A, AN and AH	SS-302-2477255-5
02	Clamp	4	1	NI-AL-BRZ, MIL-B-24059	REB101375-3
03	Cable Seal Nut	5	1	NI-AL-BRZ, MIL-B-24059	REB101374-3
04	O-ring		1	REA10083-17, MIL-P-25732	
05	Washer	6	2	NI-CU-Alloy, QQ-N-281 CL A	REA10036-103
06	Retainer	7	1	NI-AL-BRZ, MIL-B-24059	REB101614-1
07	Nut	11	1	NI-AL-BRZ, MIL-B-24059	REB101435-2
08	Gasket	10	1	Nylon, MIL-M-20693, Type VI	REB10021-103
09	Clamp	9	1	NI-AL-BRZ, MIL-B-24059	REB101436-2
10	Dielectric Clamp	8	1	NI-AL-BRZ, MIL-B-24059	REB10912-3
11	Round Head Mach Screw 0.138-32, UNC-2A x 3/16 L		2	NI-CU alloy, QQ-N-281 CL A	-
12	O-Ring		1	MS28775-111	
13	O-Ring		1	MS28775-211	
14	O-Ring		1	MS28775-327	
15	O-Ring		1	MS28775-329	
16	Socket Head Cap Screw 0.190-32, UNF-2A x 3/4 L		1	NI-CU Alloy QQ-N-281, CL A	-
17	Body Washer		1	MIL-H-21367/1, Fig. 8	-
18	Body Nut		1	MIL-H-21367/1, Fig. 9	-
19	Retaining Ring		1	TRUARC-Type 5100-162W or equal	-
20	Ring		1	MIL-H-21367/1, Fig. 7	-

1/ Item numbers are the same as numbers shown in circles on figures.

NOTES:

1. Military part number M21367/3-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-294A/U conforms to MIL-C-23020/2.
5. Hull insert M24231/25-001 conforms to MIL-C-24231/25.
6. Formerly covered on NAVSEA Drawing NAVSHIPS SS302-2477255, assembly number -3.

Preparing activity:
Navy - SH
(Project 5975-N578-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.