
MILITARY SPECIFICATION SHEET

HULL FITTING, STUFFING TUBE, TYPE MX8211/U, FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the stuffing tube described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).

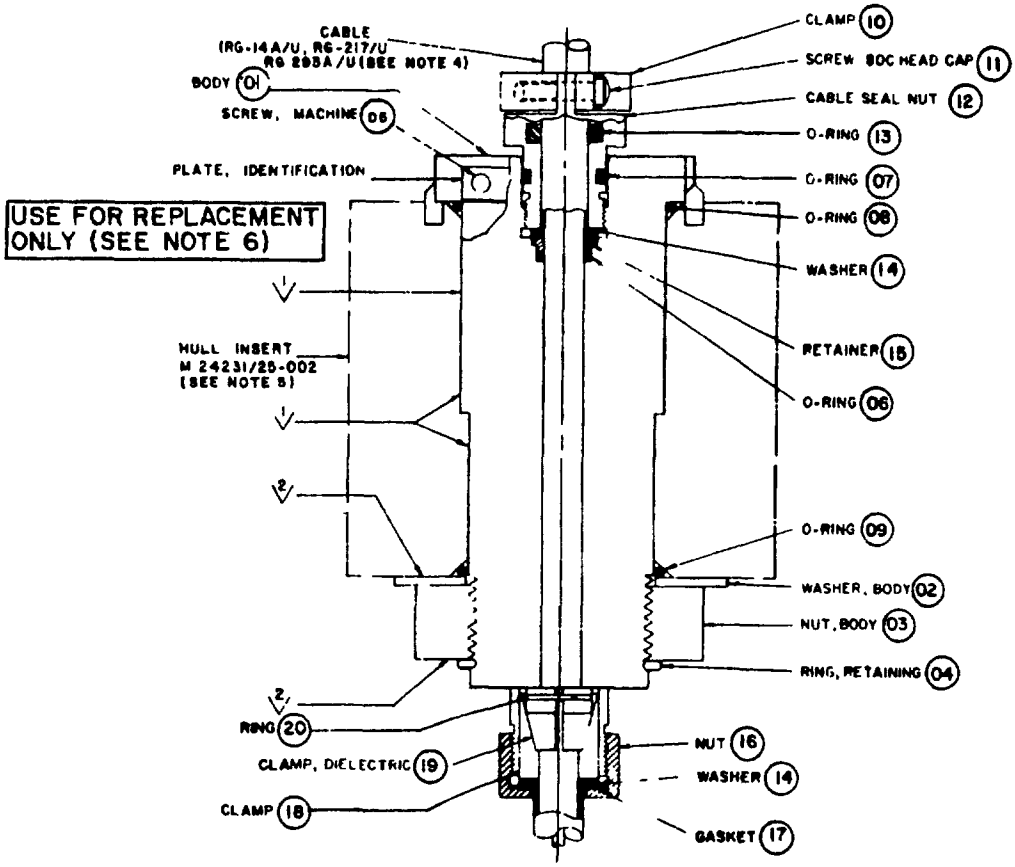

SH12812

\1/ BRINELL HARDNESS READING SHALL BE TAKEN AT THESE POINTS


\2/ BRINELL HARDNESS READING SHALL BE TAKEN AT THESE FACE AT 120 DEGREE INTERVALS

FIGURE 1. Assembly M21367/4-001 (MX8211/U).

FSC 5975

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

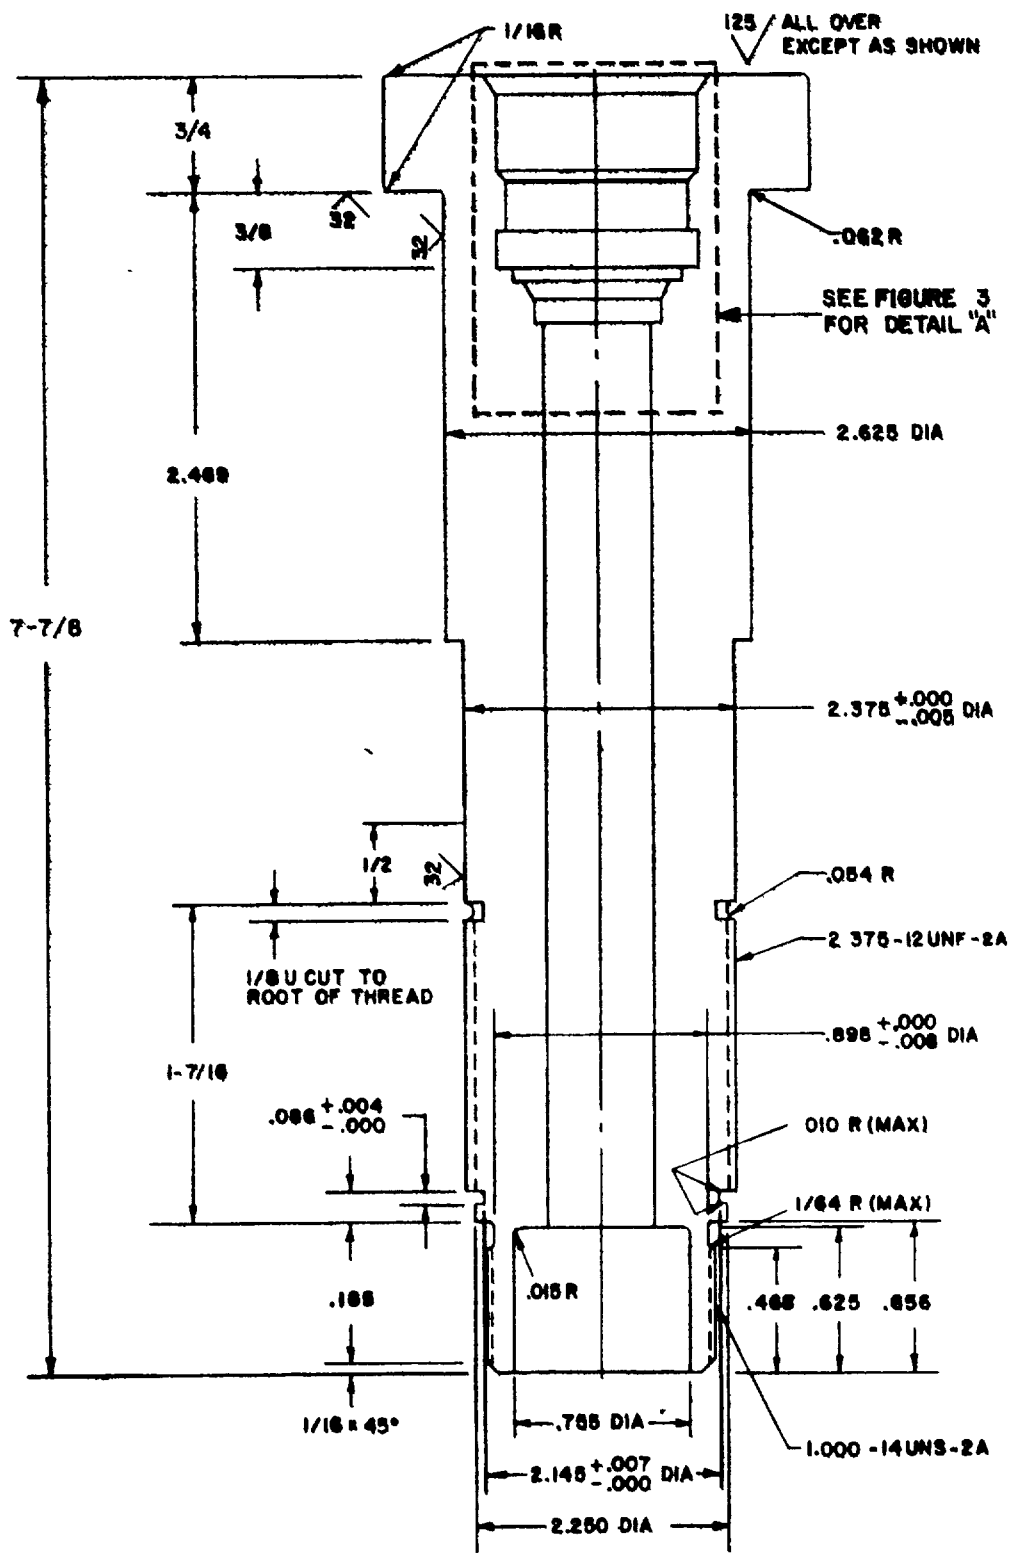

SH12813

(01) FIGURE 2. Body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.


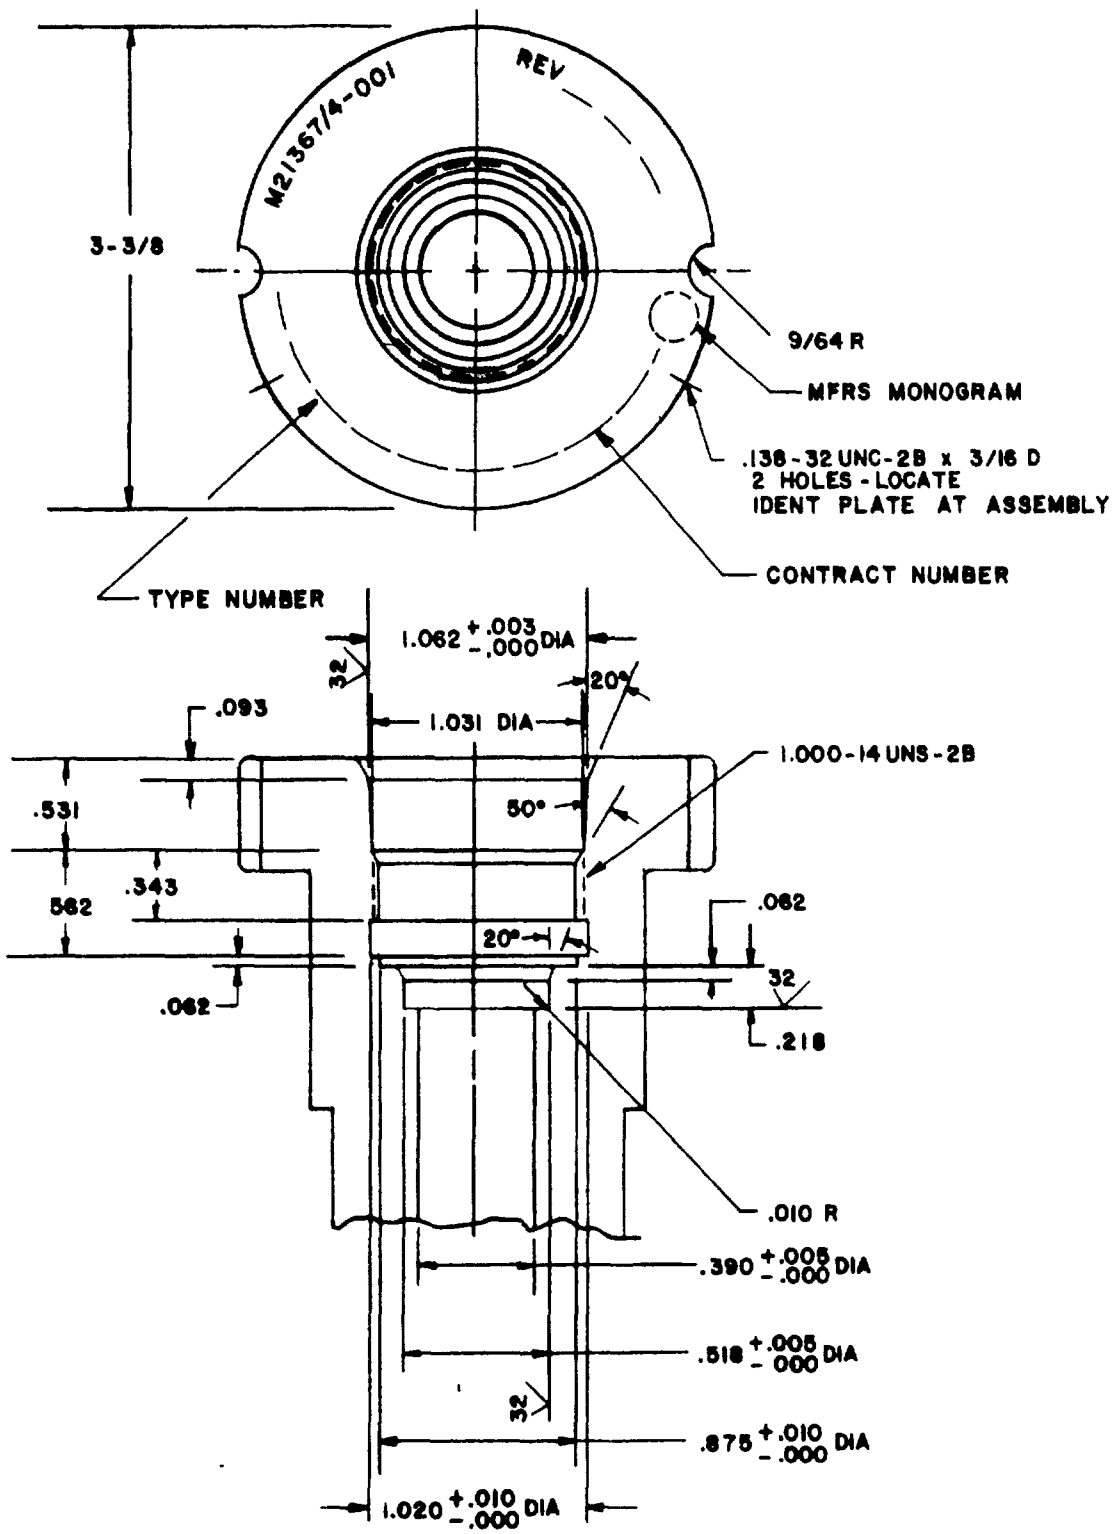



FIGURE 3. Body (detail A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

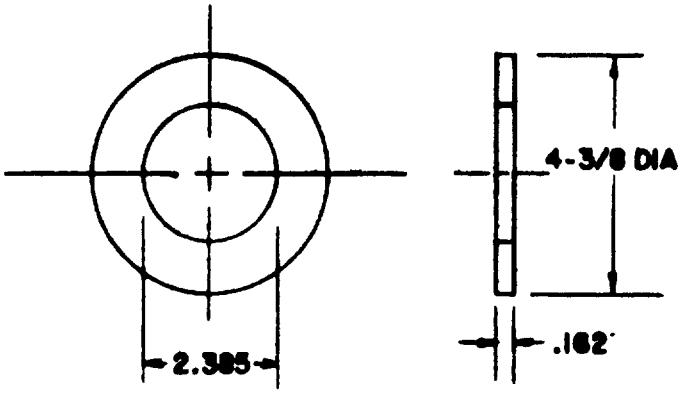

SH12815

02 FIGURE 4. Body washer.

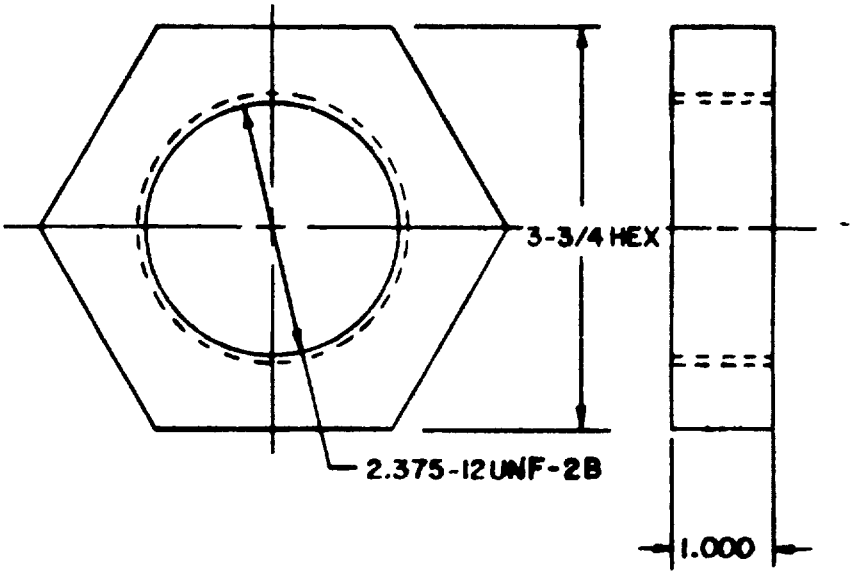

SH12816

03 FIGURE 5. Body nut.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no.1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	NI-CU-AL Alloy, QQ-N-286 CL A, AN and AH	SS-302-2477255-6
02	Body washer	4	1	NI-CU-AL Alloy, QQ-N-286 CL A, AN and AH	SS-302-2477255-10
03	Body Nut	5	1	NI-CU-AL Alloy, QQ-N-286 CL A, AN and AH	SS-302-2477255-12
04	Retaining Ring		1	TRUARC-Type 5100-225W or equal	-
05	Round Head Machine Screw 0.164-32 UNC-2A x 3/16 L		2	NI-CU-alloy, QQ-N-281 CL A	-
06	O-Ring		1	MS28775-110	-
07	O-Ring		1	MS28775-211	-
08	O-Ring		1	MS28775-334	-
09	O-Ring		1	MS28775-332	-
10	Clamp		1	MIL-H-21367/1, Fig. 4	-
11	Socket Head Cap Screw 0.190-32, UNF-2A x 3/4 L		2	NI-CU Alloy, QQ-N-281 CL A	-
12	Cable Seal Nut		1	MIL-H-21367/1, Fig. 5	-
13	O-Ring		1	REA10083-16, MIL-P-25732	
14	Washer		2	MIL-H-21367/1, Fig. 6	-
15	Retainer		1	MIL-H-21367/1, Fig. 12	-
16	Nut		1	MIL-H-21367/1, Fig. 10	-
17	Gasket		1	MIL-H-21367/1, Fig. 11	-
18	Clamp		1	MIL-H-21367/1, Fig. 14	-
19	Dielectric Clamp		1	MIL-H-21367/1, Fig. 13	-
20	Ring		1	MIL-H-21367/1, Fig. 7	-

1/ Item numbers are the same as numbers shown in circles on figures.

NOTES:

1. Military part number M21367/4-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-14A/U conforms to MIL-C-23020/6, RG-217/U conforms to MIL-C-17/78 and RG-293A/U conforms to MIL-C-23020/1.
5. Hull insert M24231/25-002 conforms to MIL-C-24231/25.
6. Type MX-8211/U should be used for replacement only. For new installations, use MX-8208 conforming to MIL-H-21367/1.
7. Formerly covered on NAVSEA Drawing NAVSHIPS SS302-2477255, assembly number -4.

Preparing activity:
Navy - SH
(Project 5975-N578-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.