MILITARY SPECIFICATION SHEET

HULL FITTING, STUFFING TUBE, TYPE MX8213/U, FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the stuffing tube described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).


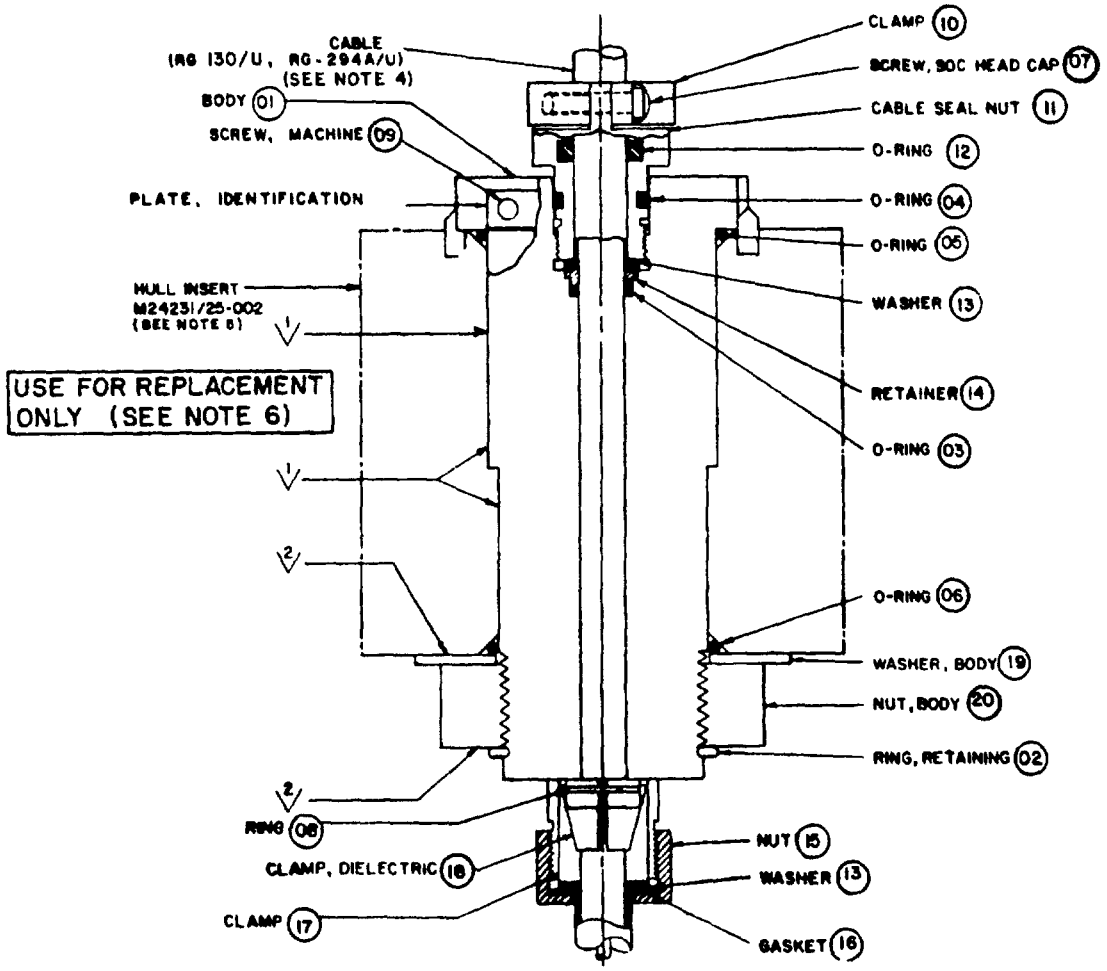


FIGURE 1. Assembly M21367/6-001 type MX8213/U.

FSC 5975


DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

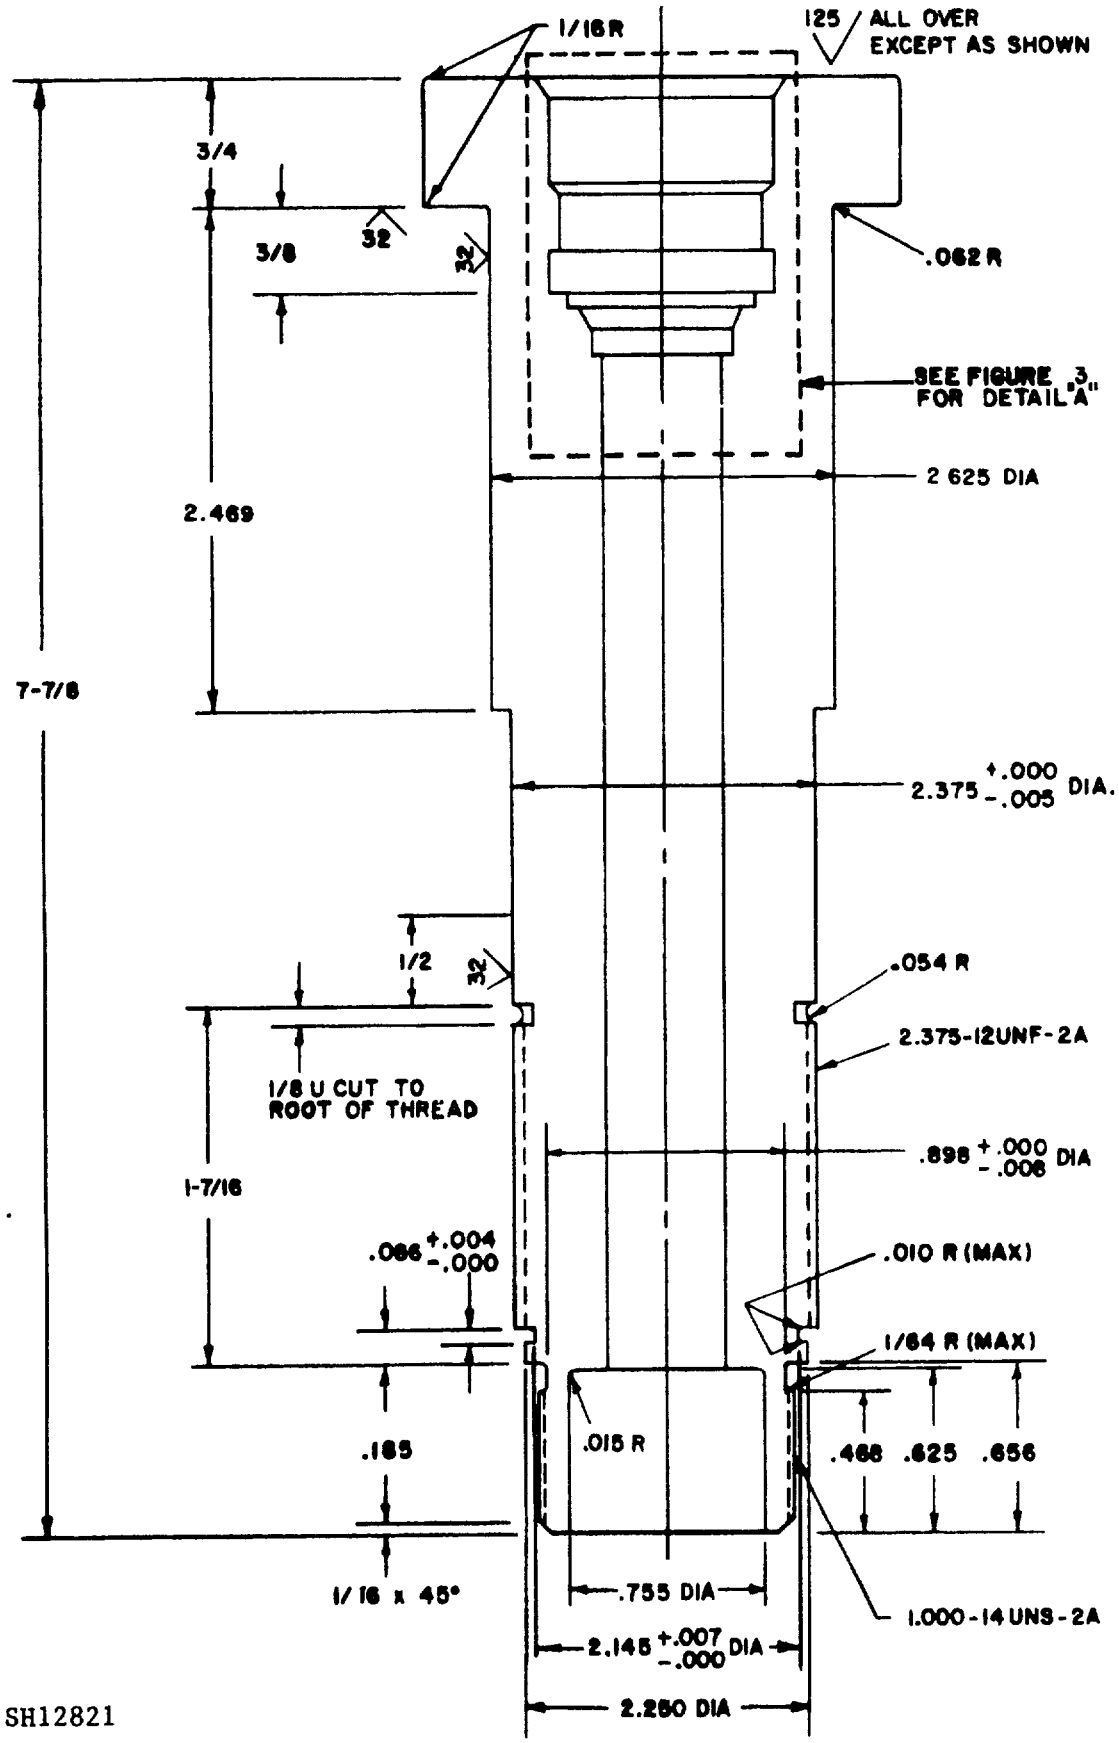

(01) FIGURE 2. Body.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

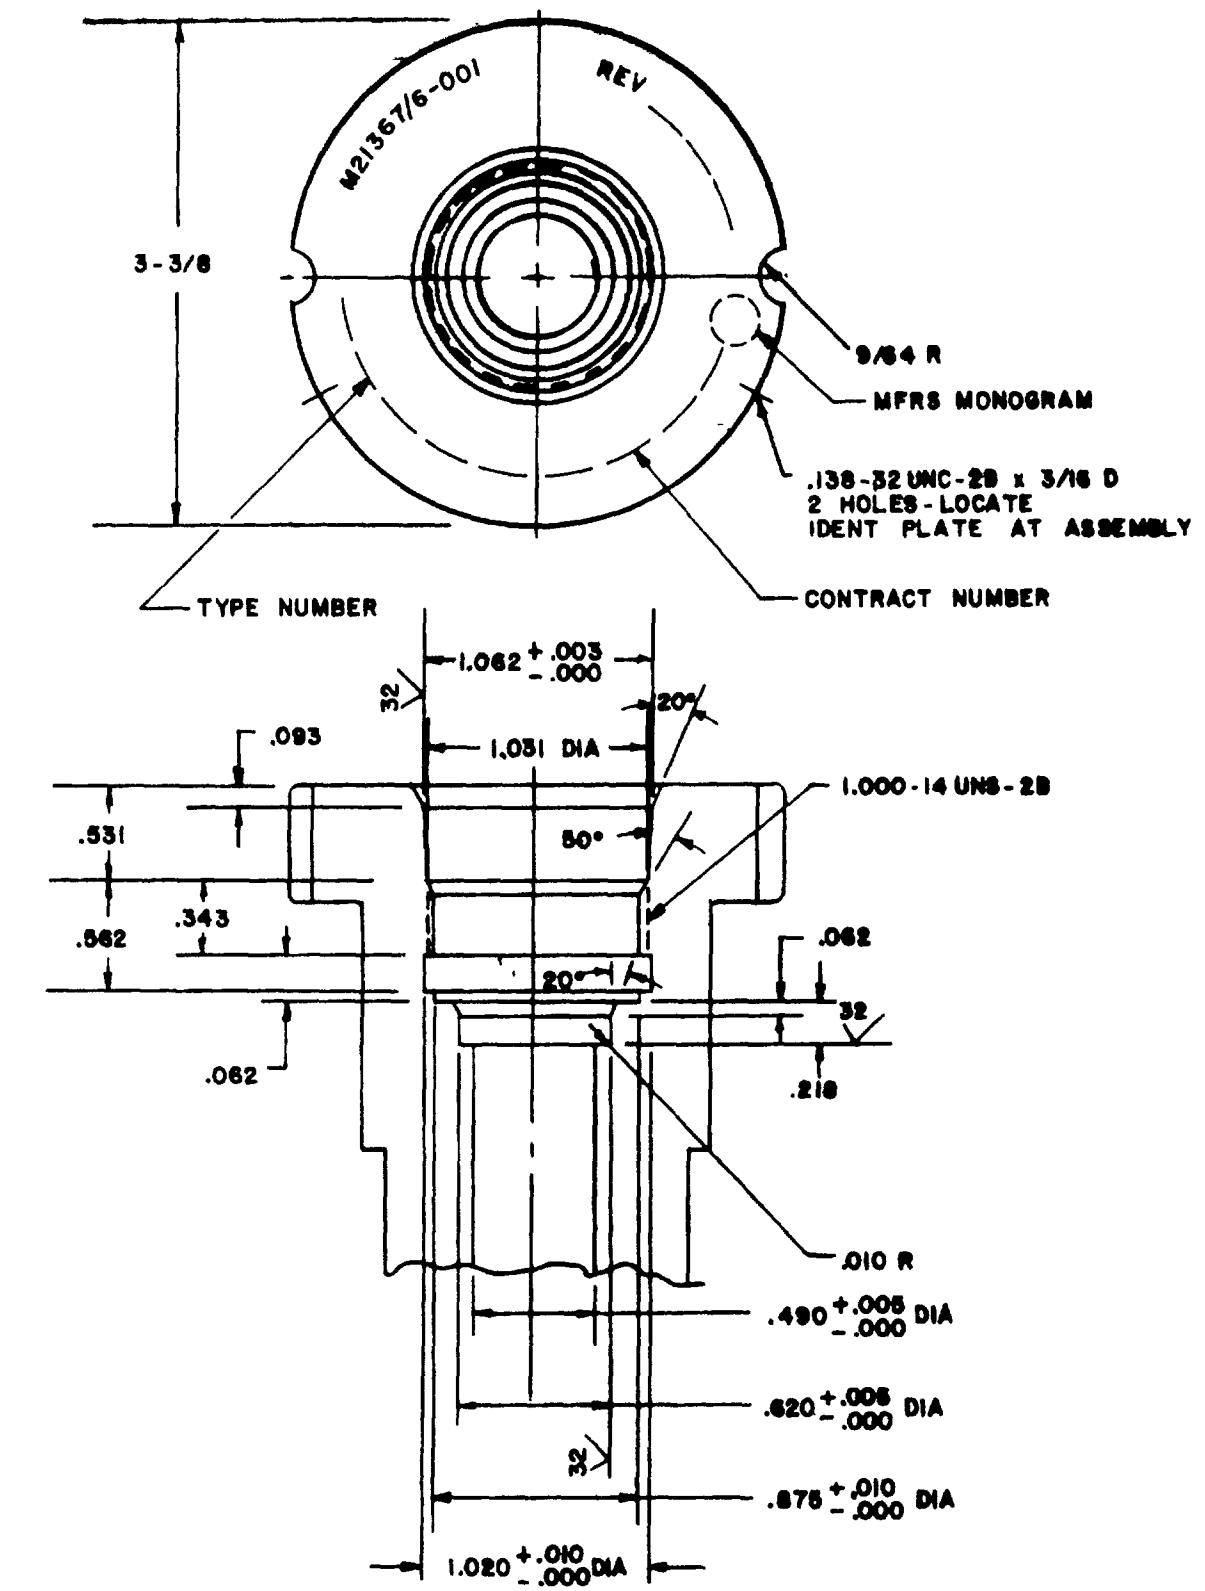

SH12822

FIGURE 3. Body (detail A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Item no. 1/	Description	Fig	Qty	Material/spec	Formerly covered on Drawing
01	Body	2	1	NI-CU-AL Alloy, QQ-N-286 CL A, AN and AH	SS-302-2477255-8
02	Retaining Ring		1	TRUARC-Type 5100-225W or equal	
03	O-Ring		1	MS28775-111	
04	O-Ring		1	MS28775-211	
05	O-Ring		1	MS28775-334	
06	O-Ring		1	MS28775-332	
07	Socket Head Cap Screw 0.190-32, UNF-2A x 3/4 L		2	NI-CU-Alloy, QQ-N-281 CL A	
08	Ring		1	MIL-H-21367/1, Fig. 7	
09	Round Head Machine Screw 0.138-32, UNC-2A x 3/16 L		2	NI-CU Alloy, QQ-N-281 CL A	
10	Clamp		1	MIL-H-21367/3, Fig. 4	
11	Cable Seal Nut		1	MIL-H-21367/3, Fig. 5	
12	O-Ring		1	REA10083-17, MIL-P-25732	
13	Washer		2	MIL-H-21367/3, Fig. 6	
14	Retainer		1	MIL-H-21367/3, Fig. 7	
15	Nut		1	MIL-H-21367/3, Fig. 11	
16	Gasket		1	MIL-H-21367/3, Fig. 10	
17	Clamp		1	MIL-H-21367/3, Fig. 9	
18	Dielectric Clamp		1	MIL-H-21367/3, Fig. 8	
19	Body Washer		1	MIL-H-21367/4, Fig. 4	
20	Body Nut		1	MIL-H-21367/4, Fig. 5	

1/ Item numbers are the same as numbers shown in circles on figures.

NOTES:

1. Military part number M21367/6-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG130A/U cable conforms to MIL-C-17/56 and type RG-294A/U conforms to MIL-C-23020/2.
5. Hull insert M24231/25-002 conforms to MIL-C-24231/25.
6. Type MX8213/U should be used for replacement purposes only. For new installations, use type MX8210 conforming to MIL-H-21367/3.
7. This specification sheet supersedes assembly number 6 of NAVSEA Drawing NAVSHIPS SS302-2477255 dated 22 August 1977.

Preparing activity:
Navy - SH
(Project 5975-N578-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:23Z
Check the source to verify that this is the current version before use.