MIL-H-21367/9(SH)
18 October 1985
SUPERSEDING
DRAWING REC 49366J
25 March 1964

MILITARY SPECIFICATION SHEET

# HULL FITTING, STUFFING TUBE, TYPE MX2327/U FOR FLEXIBLE, SOLID-DIELECTRIC, RADIO-FREQUENCY CABLE

This specification is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the stuffing tube described herein shall consist of this specification and the latest issue of MIL-H-21367(SH).

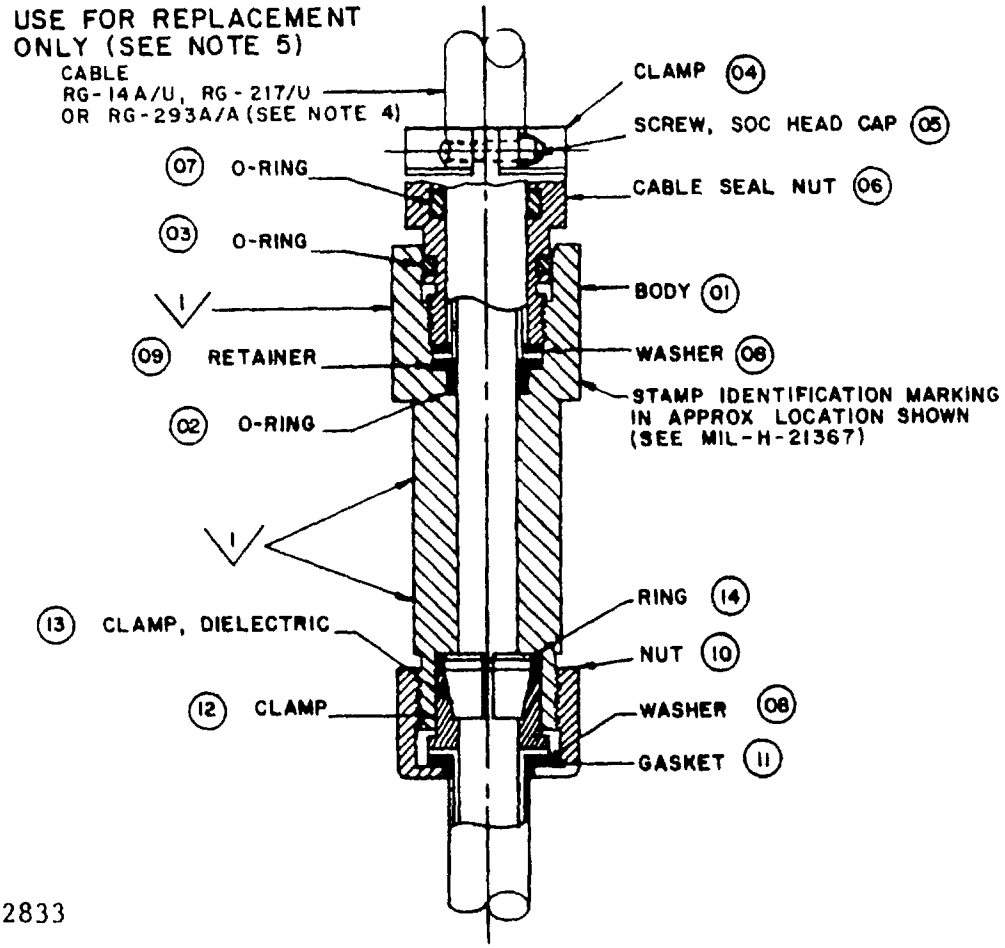


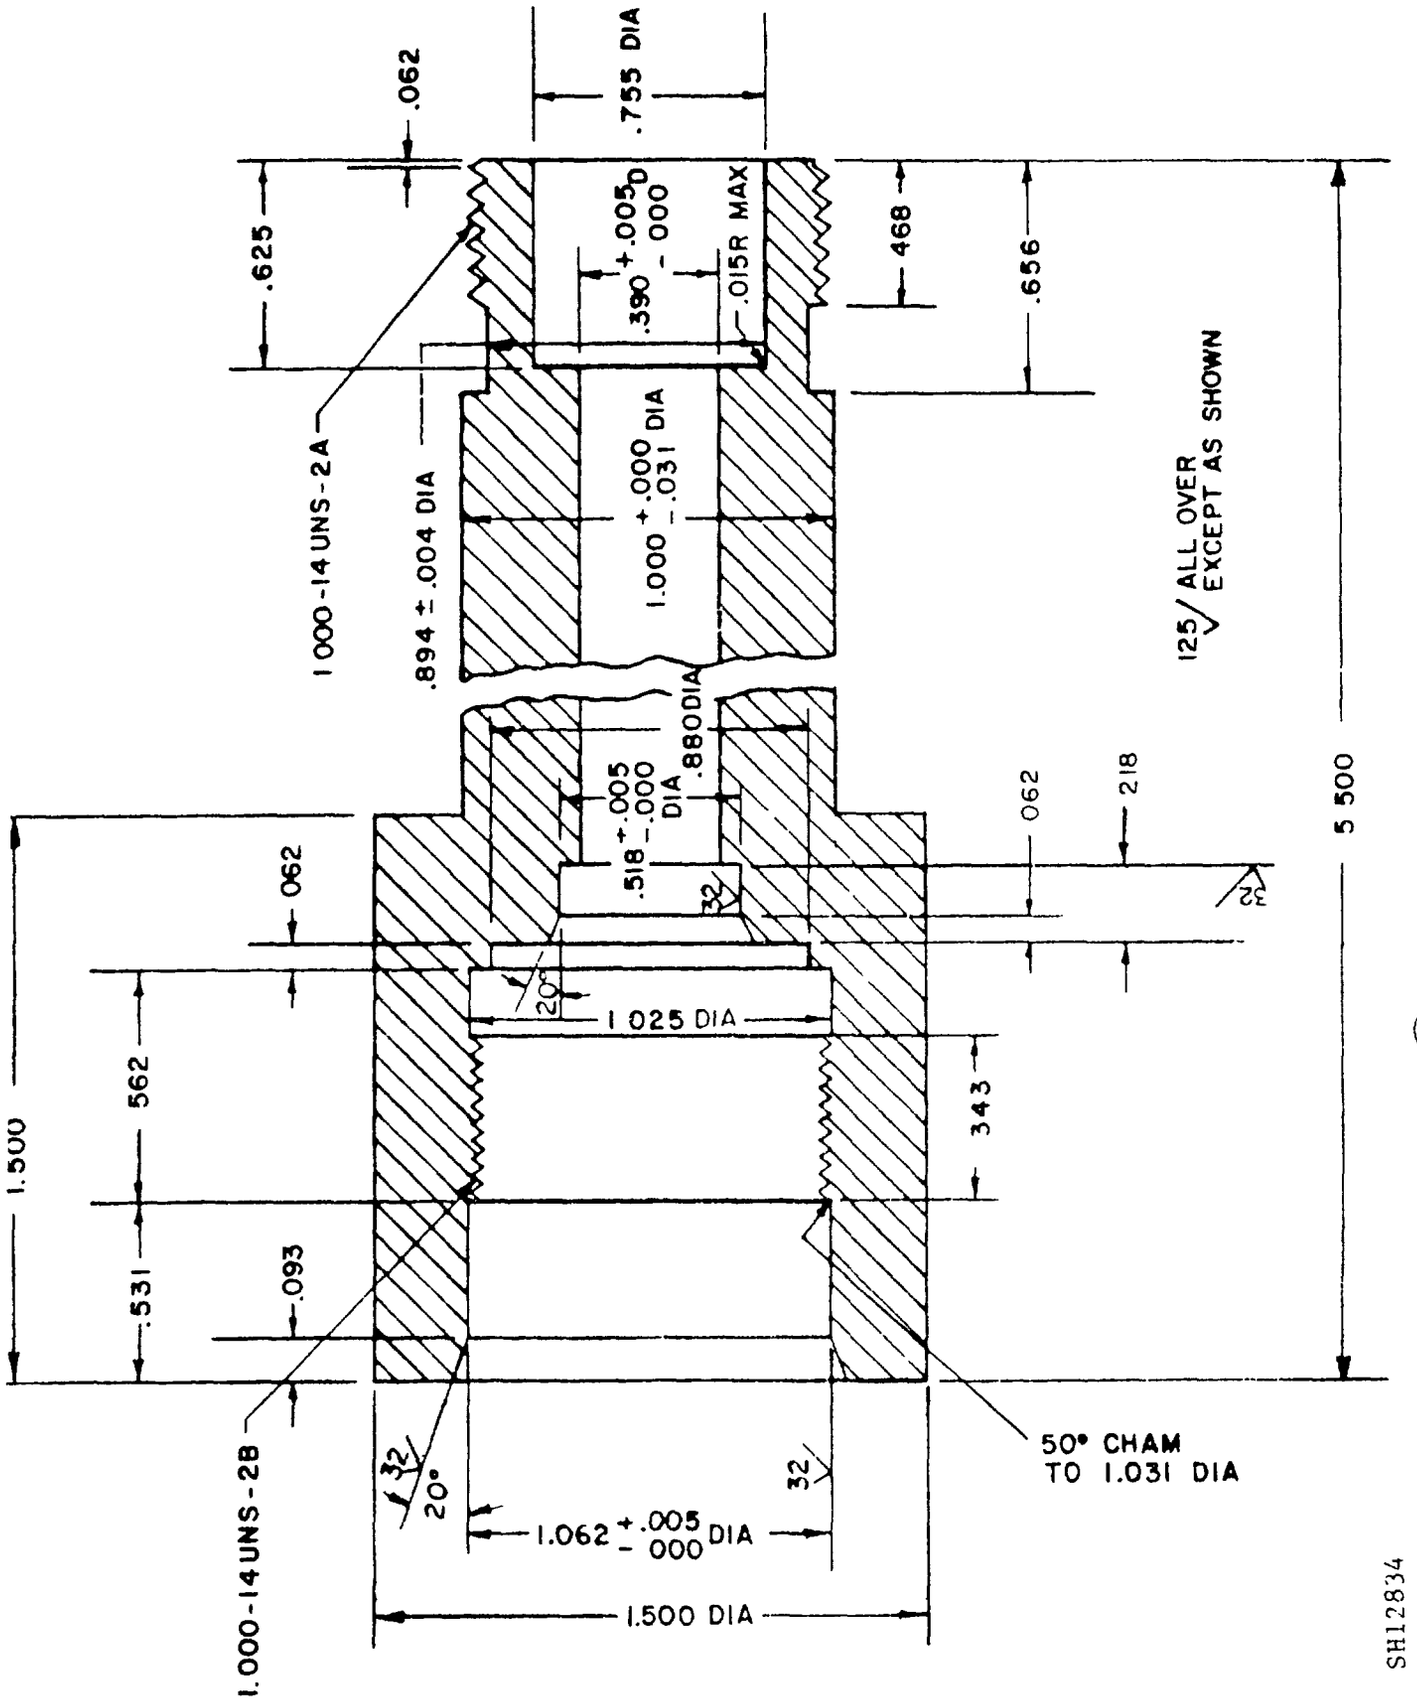

FIGURE 1. Assembly 21367/9-001 (MX2327/U).

FSC 5975

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:24Z
Check the source to verify that this is the current version before use.




(10) [illegible] Body.

SH12834



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:24Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

| Item no. 1/ | Description | Fig | Qty | Material/spec | Formerly covered on Drawing |
|---|---|---|---|---|---|
| 01 | Body | 2 | 1 | NI-CU Alloy, QQ-N-281 CL A, Cold Drawn (Stress Relieved) | REC101434-1 |
| 02 | O-Ring | | 1 | MS28775-110 | |
| 03 | O-Ring | | 1 | MS28775-211 | |
| 04 | Clamp | | 1 | MIL-H-21367/1, Fig. 4 | |
| 05 | Socket Head Cap Screw 0.190-32, UNF-2A x 3/4 L | | 2 | NI-CU Alloy, QQ-N-281 CL A | |
| 06 | Cable Seal Nut | | 1 | MIL-H-21367/1, Fig. 5 | |
| 07 | O-Ring | | 1 | MIL-P-25732, REA10083-16 | |
| 08 | Washer | | 2 | MIL-H-21367/1, Fig. 6 | |
| 09 | Retainer | | 1 | MIL-H-21367/1, Fig. 12 | |
| 10 | Nut | | 1 | MIL-H-21367/1, Fig. 10 | |
| 11 | Gasket | | 1 | MIL-H-21367/1, Fig. 11 | |
| 12 | Clamp | | 1 | MIL-H-21367/1, Fig. 14 | |
| 13 | Dielectric Clamp | | 1 | MIL-H-21367/1, Fig. 13 | |
| 14 | Ring | | 1 | MIL-H-21367/1, Fig. 7 | |

1/ Item numbers are the same as numbers shown in circles on figures.

NOTES:

1. Military part number M21367/9-001.
2. All dimensions in inches.
3. Unless otherwise specified herein, tolerances shall be plus or minus 1/64-inch for fractions and plus or minus 0.005 for decimals. Angular tolerance shall be plus or minus 1/2 degree.
4. Type RG-14A/U cable conforms to MIL-C-23020/6, type RG-217/U conforms to MIL-C-17/78 and RG-293A/U conforms to MIL-C-23020/1.
5. Type MX2327/U should be used for replacement purposes only. For new installations, use type MX8208 conforming to MIL-H-21367/1.

Preparing activity:
Navy - SH
(Project 5975-N578-9)



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:24Z
Check the source to verify that this is the current version before use.