MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES·
KEYING ACCESSORIES

This specification sheet is approved for use by Rome Air Development Center, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring keying accessories described herein shall consist of this document and the latest issue of Specification MIL-C-55302

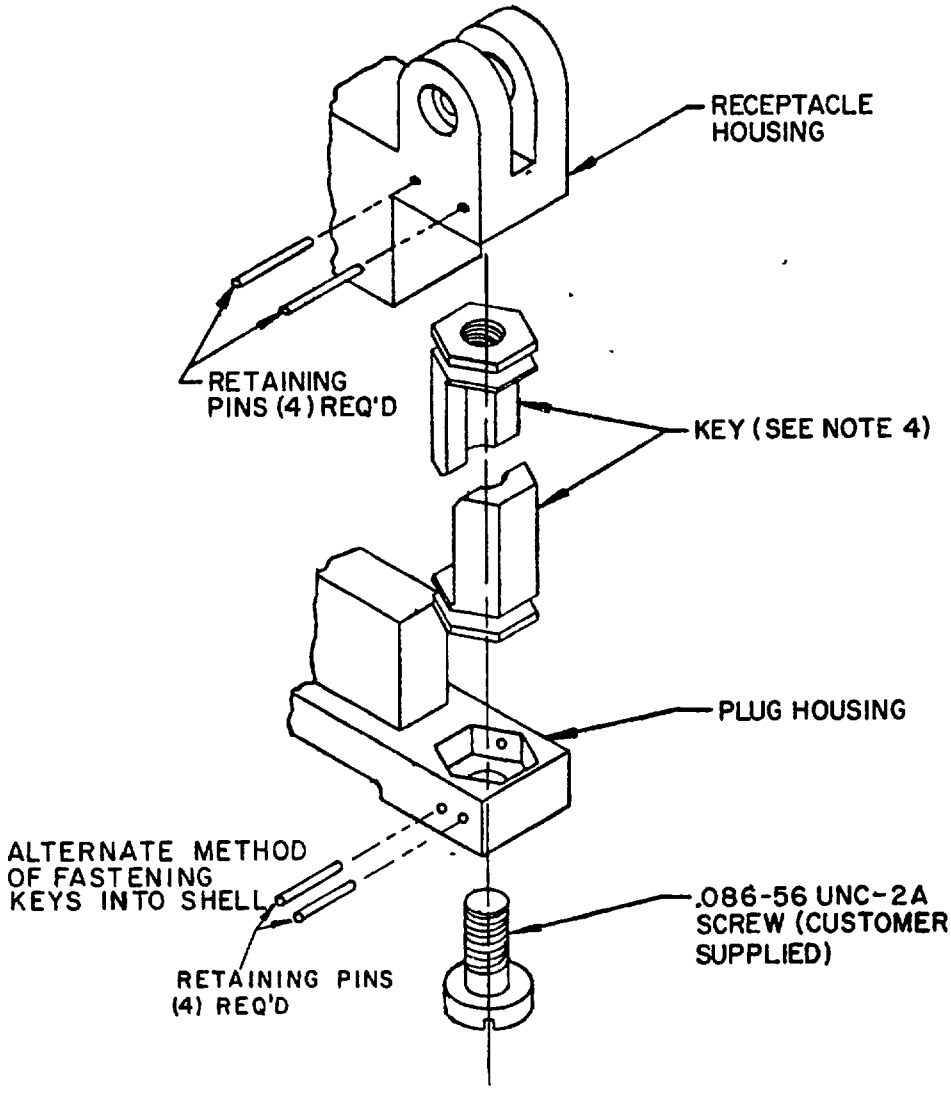


FIGURE 1. Key assembly.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.


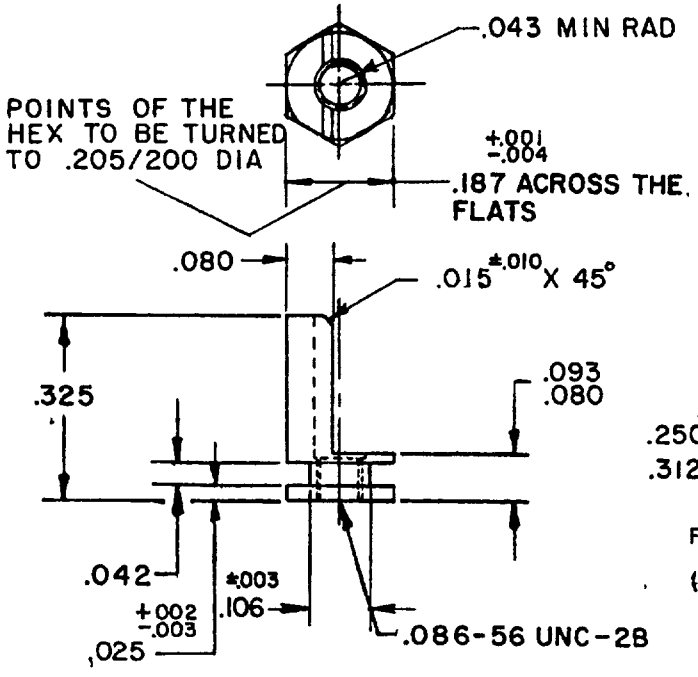


FIGURE 1-A. Key.

KEY/PIN PART NUMBER	A ±.010
M55302/124-01	.250
M55302/124-02	.312

(SEE NOTE 6)



.250 LG.=MS51923-113 OR NAS1407NIM
.312 LG =MS51923-114 OR NAS1407NIM

FIGURE 1-B. Pin, roll, key retaining.

(See note 6.)

INCHES	MM
.001	.02
.002	.05
.003	.08
.004	.10
.010	.25
.015	.38
.025	.64
.034	.86
.042	1.07
.043	1.09
.080	2.03
.086	2.18
.106	2.69
.187	4.75
.200	5.08
.205	5.21
.250	6.35
.312	7.92
.325	8.26

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Keys are furnished (loose pack) with connectors to be installed by customer.
5. There are 6 possible positions per end which gives 36 total positions available for keying.
6. Keys and pins are furnished with connectors. If ordered separately they consist of the following parts:

   a. M55302/124-01 (for M55302/120 and 121) - Two keys and 4 roll pins (.250 length).
   b. M55302/124-02 (for M55302/122 and 123) - Two keys and 4 roll pins (.312 length).
   c. M55302/124-03 (for M55302/120 and 122) - Two keys and no roll pins.

FIGURE 1. Key assembly - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material and finish:
Key: Stainless steel per QQ-S-766 or per QQ-S-764 passivated per QQ-P-35.
Roll pins: Stainless steel per QQ-S-766 passivated per QQ-P-35.

Application:
Keys to be used with MIL-C-55302/120 thru 123.
Roll pin to be used with MIL-C-55302/120 thru 123; 121 and 123 mandatory; and 120 and 122 optional.

Installation:
Socket connector (daughterboard): Place key in hexagonal cavity in predetermined position (one of six). Next push roll pins into the two holes in connector body.
Pin connector (motherboard): Place key in hexagonal cavity in predetermined position (one of six) to match opposing key in socket connector. Hold key in position by installing mounting screw thru the motherboard or push roll pins into the two holes in the connector.

Part number: M55302/124-(dash number from associated table with figure 1-B.)

Qualification and quality conformance requirements are not applicable.

Custodians:
Air Force - 17

Review activities:
Air Force - 11, 85, 99
DLA - ES

User activity:
Air Force - 19

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5935-F027-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-55302/124 (USAF)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD 316



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Defense Electronics Supply Center
1507 Wilmington Pike
Dayton OH 45444
ATTN: ESD

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:51Z
Check the source to verify that this is the current version before use.