
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES PIN, STRAIGHT-THRU, FOR PRINTED WIRING BOARDS (.200 SPACING)

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-55302.


This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

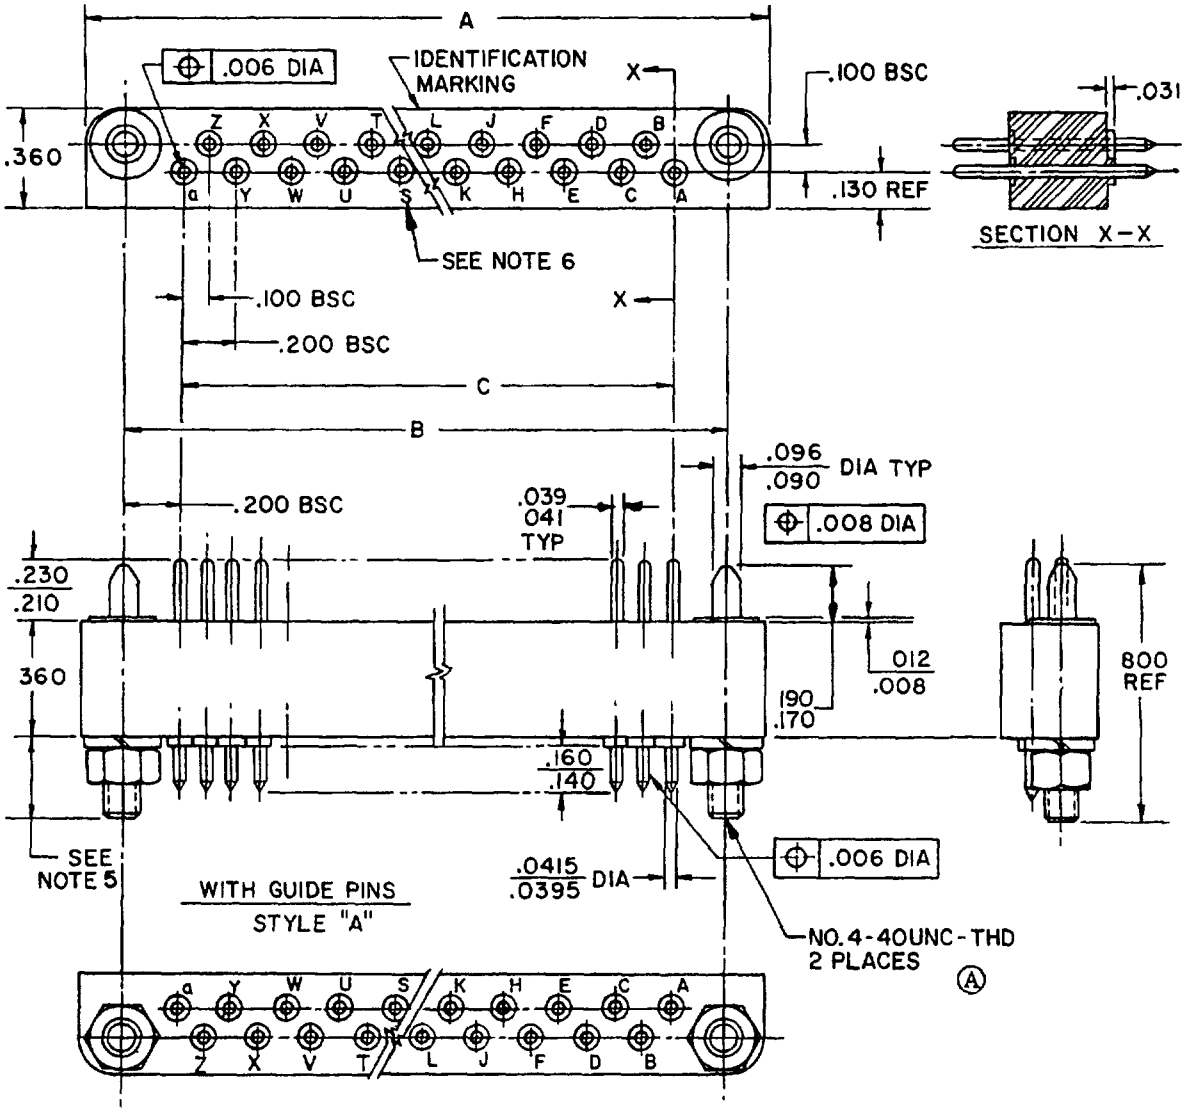


Ⓐ denotes changes

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

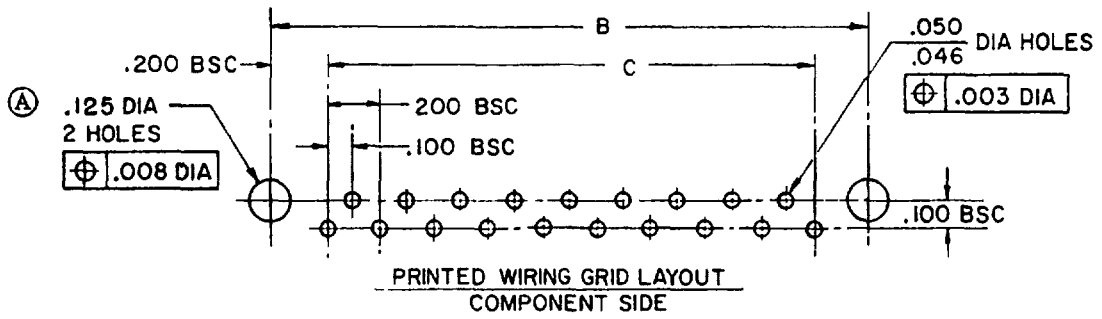

PRINTED WIRING GRID LAYOUT
COMPONENT SIDE

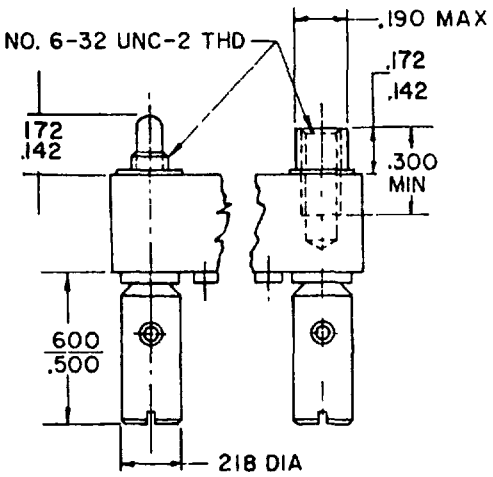

WITH ROTATING SCREWLOCKS
STYLE "C"

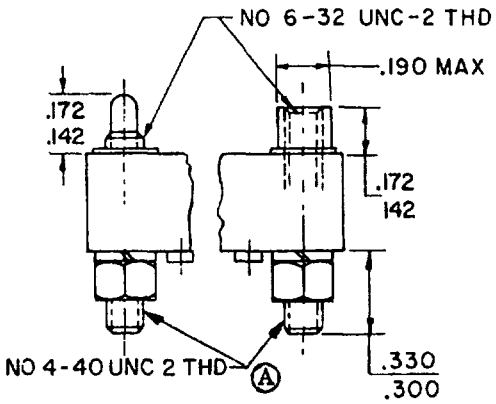

WITH FIXED SCREWLOCKS
STYLE "D"

TABLE I. Dimensions and part number.

Mounting styles	Guide pins	Rotating screw-locks	Fixed screw-locks	No. contacts	Dimensions		
					A ±.010	B BSC	C Ref
Part number M55302/18-( )	Dash no.	Dash no.	Dash no.				
	01	07	13	7	1.300	1.000	.600
	02	08	14	9	1.500	1.200	.800
	03	09	15	11	1.700	1.400	1.000
	04	10	16	15	2.100	1.800	1.400
	05	11	17	19	2.500	2.200	1.800
	06	12	18	23	2.900	2.600	2.200
	19	20	21	37	4.300	4.000	3.600

FIGURE - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.046	1.17	.150	3.81	.218	5.54	.800	20.32	1.800	45.72
.006	.15	.050	1.27	.156	3.96	.230	5.84	1.000	25.40	2.100	53.34
.008	.20	.090	2.29	.160	4.06	.300	7.62	1.200	30.48	2.200	55.88
.012	.30	.096	2.44	.165	4.19	.330	8.38	1.300	33.02	2.500	63.50
.031	.79	.100	2.54	.190	4.83	.360	9.14	1.400	35.56	2.600	66.04
.0395	1.00	.125	3.18	.200	5.08	.500	12.70	1.500	38.10	2.900	73.66
.0415	1.05	.130	3.30	.210	5.33	.600	15.24	1.700	43.18		
		.140	3.56								

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. These connectors mate with connectors specified in MIL-C-55302/17 and are primarily for use with single-sided and double-sided printed wiring board.
Ⓐ5. Mounting screws for .062 (1.57 mm) and .094 (2.39 mm) thick printed wiring boards shall be .250 (6.35 mm) long.
6. Contact identification letters may be molded as shown on horizontal.

FIGURE - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions	See figure, table I and note 5.
Material	Style A mounting and guidance hardware shall be brass rod, composition 22, half hard as specified in QQ-B-626, nickel plated .0002" thick per QQ-N-290. Styles C and D mounting guidance hardware shall be corrosion resistant steel per QQ-S-763, class 303, passivated per QQ-P-35.
Contact identification	Shall be alphabetical and sequential in the pattern indicated, using upper case characters followed by lower case characters.
Mating and unmating	The maximum insertion force, in pounds, shall not exceed a value equal to 1.0 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of 0.25 times the number of contacts, and shall not exceed the measured insertion force.
Contact resistance	The average resistance of all contact pairs measured shall not exceed 0.015 ohm, and no individual contact pair shall have a resistance exceeding 0 020 ohm.
Dielectric withstanding voltage:	
Sea level	1,000 volts rms, 60 cycles, ac.
High altitude	500 volts rms, 60 cycles, ac.
Pin size	20
Wire size	20
Current rating, maximum	7.5 amperes.
Part number	See table I

Custodians.
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MI, MU
Navy - SH, AS, OS
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - ME, AT, AV
Navy - MC
Air Force - 19

Preparing activity
Army - EL

Agent
DSA - ES

(Project 5935-1704-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:44Z
Check the source to verify that this is the current version before use.