INCH-POUND
MIL-DTL-55302/84C
w/AMENDMENT 2
16 April 2021
SUPERSEDING
MIL-DTL-55302/84C
w/AMENDMENT 1
14 March 2011


DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: CONTACTS – CRIMP, DIP SOLDER TAIL, SOLDER TURRET, AND WIREWRAP


Inactive for new design after 1 July 1989.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.

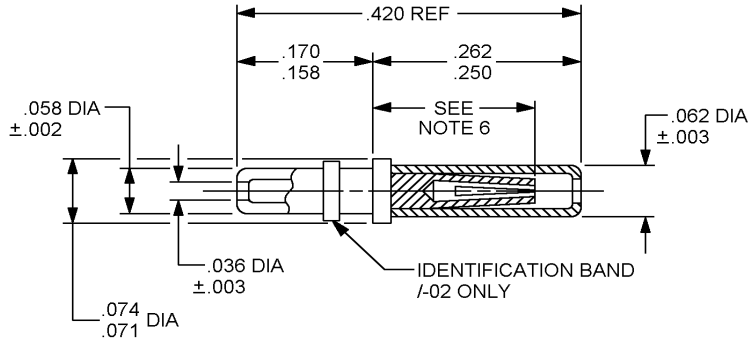

FEMALE CONTACT, CRIMP
M55302/84-01
M55302/84-02

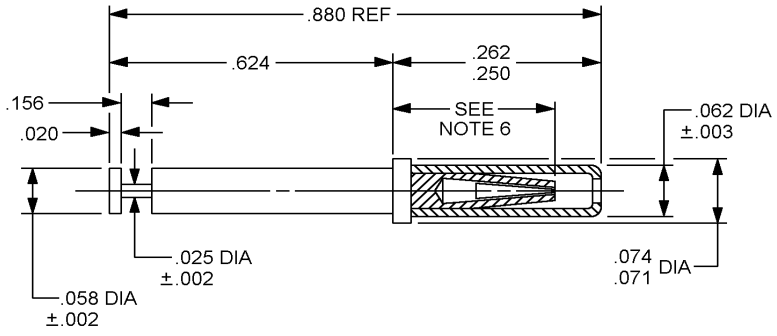


SOLDER TURRET
M55302/84-04

FIGURE 1. Contact termination.


AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.

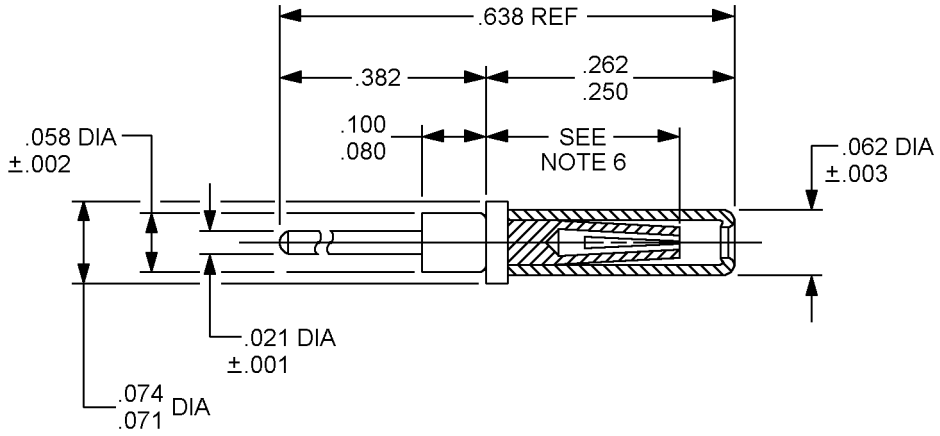


FEMALE CONTACT, DIP SOLDER TAIL
M55302/84-03

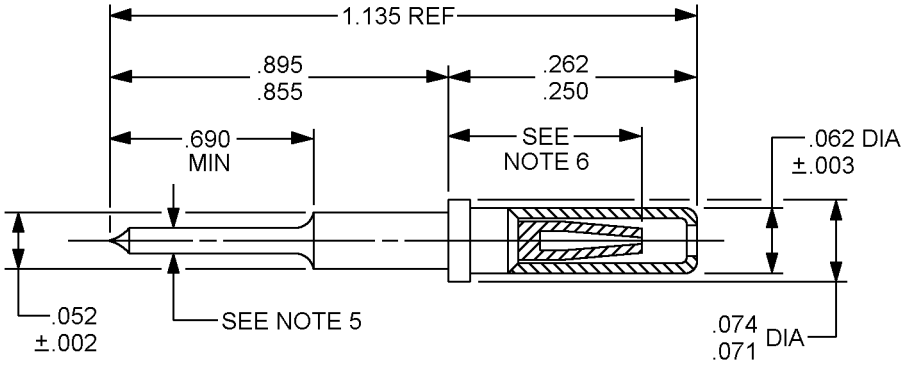

WIRE-WRAP
M55302/84-05

FIGURE 1. Contact termination – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.

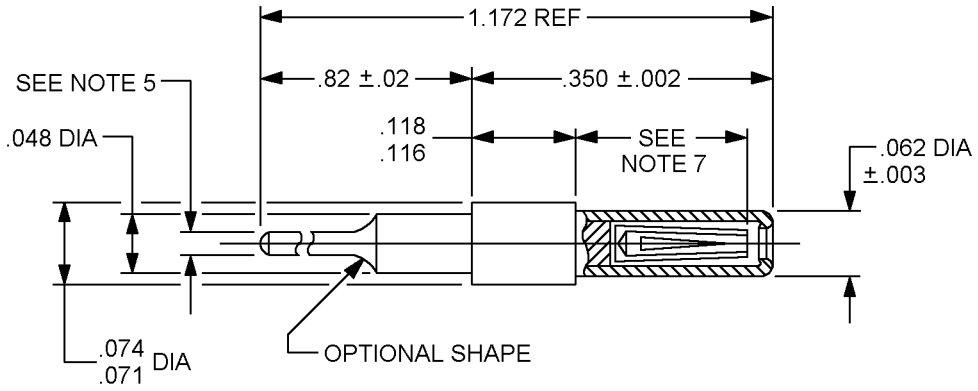

WIRE-WRAP
M55302/84-06

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.074	1.88	.382	9.70
.002	0.05	.080	2.03	.420	10.67
.003	0.08	.100	2.54	.624	15.85
.020	0.51	.116	2.95	.638	16.21
.021	0.53	.118	3.00	.690	17.53
.025	0.64	.156	3.96	.855	21.72
.036	0.91	.158	4.01	.82	20.8
.048	1.22	.170	4.32	.880	22.35
.052	1.32	.250	6.35	.895	22.73
.058	1.47	.262	6.65	1.135	28.83
.062	1.57	.350	8.89	1.172	29.77
.071	1.80				

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .005 (0.13 mm) for three place decimals, ± .02 (0.5 mm) for two place decimals, and ±2° on angles.
4. These connectors mate with connectors in accordance with MIL-DTL-55302/82.
5. Dimensions shall be .025 nominal, .022 minimum.
6. Minimum point of .210 (5.33 mm) at which gauge having the minimum diameter of the mating pin and a square face encase socket contact spring.
7. Minimum point of .304 (7.72 mm) at which gauge having the minimum diameter of the mating pin and a square face encase socket contact spring.

FIGURE 1. Contact termination – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Material:

Crimp, removable: 01 - Phosphor bronze in accordance with ASTM B134/B134M.

02 - Beryllium copper in accordance with ASTM B196/B196M.

Dip solder tail: 03

Solder eyelet: 04 - Phosphor bronze in accordance with ASTM B134/B134M.

Wrappost: 05

06

Contact sleeve: Stainless steel in accordance with ASTM A240/A240M. All contact sleeves are passivated except -01 which has a gold flash.

Plating: Contact finish in accordance with MIL-DTL-45204, type 2, grade C, class 1, over copper plate.

Qualification and quality conformance requirements are not applicable. All contacts are tested in accordance with the applicable specification sheet. All contacts are supplied with MIL-DTL-55302/82 and cannot be acquired separately.

Part or Identifying Number (PIN): M55302/84-(dash number from figure I).

Amendment notations. The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Reference documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-45204
MIL-DTL-55302/82
ASTM A240/A240M
ASTM B134/B134M
ASTM B196/B196M

CONCLUDING MATERIAL

Custodians:
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-2021-040)

Review activities:
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:48Z
Check the source to verify that this is the current version before use.