INCH-POUND
MIL-PRF-49470/6A
11 January 2000
SUPERSEDING
MIL-PRF-49470/6
19 November 1997

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, CERAMIC DIELECTRIC, SWITCH MODE POWER SUPPLY (GENERAL PURPOSE AND TEMPERATURE STABLE), STANDARD RELIABILITY AND HIGH RELIABILITY, CONFORMALLY COATED, VERTICALLY STACKED, STYLE PS06

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-49470.

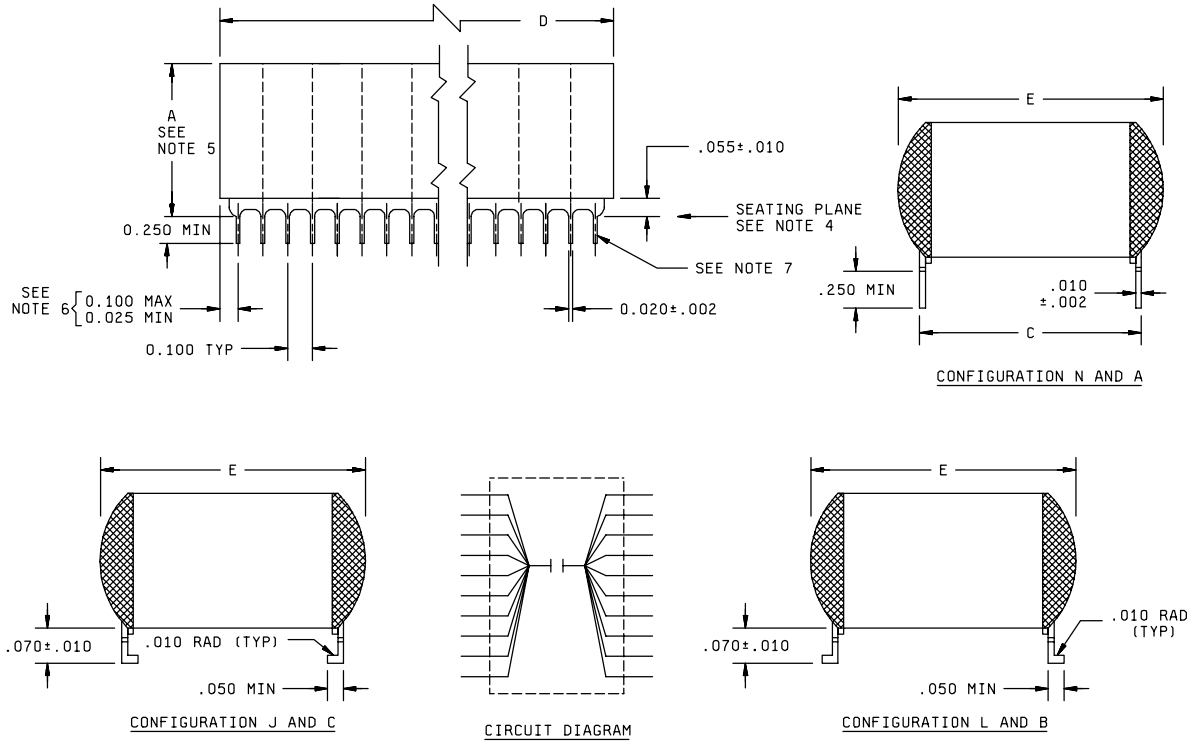


FIGURE 1. Style PS06 capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

Dimensions					
Case code	C ± .025	D		E (max)	Number of leads per side
		Min	Max		
1	.450	1.950	2.085	.510	20
2	.800	1.450	1.545	.880	15
3	.450	.950	1.085	.510	10
4	.400	.350	.435	.450	4
5	.250	.224	.285	.310	3
6	1.250	1.950	2.085	1.360	20

Inches	mm	Inches	mm
.002	0.05	.425	10.80
.010	0.25	.440	11.18
.020	0.51	.450	11.43
.025	0.64	.500	12.70
.050	1.27	.800	20.32
.055	1.40	.870	22.10
.070	1.78	.950	24.13
.100	2.54	1.075	27.30
.224	5.69	1.250	31.75
.250	6.35	1.350	34.29
.275	6.98	1.450	36.83
.300	7.62	1.535	38.99
.350	8.89	1.950	49.53
.400	10.16	2.075	52.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 inch (0.25 mm).
4. Lead frame configuration is shown as typical above the seating frame.
5. The A dimension is the off board height. For the straight or N style leads, A is from the top of the unit to the bottom of the lead standoff. For the formed or L & J style leads, A is from the top of the unit to the bottom of the lead.
6. For case code 5, dimensions shall be .100 inch (2.54 mm) maximum and .012 inch (0.30 mm) minimum.
7. Lead alignment within pin rows shall be within ±.005 inch (0.13 mm).

FIGURE 1. Style PS06 capacitors - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Precautionary note: Capacitors covered by this specification sheet are very susceptible to thermal shock damage due to their large ceramic mass. Temperature profiles used should provide adequate temperature rise and cool-down time to prevent damage from thermal shock.

Dimensions and configurations: See figure 1.

Case type: Conformally coated, vertically stacked.

Capacitance: See table I.

Capacitance tolerance: J = ±5 percent, K = ±10 percent, M = ±20 percent.

Operating temperature range: -55°C to +125°C.

Voltage rating: See table I.

Dielectric types: BP, BQ, BR, and BX in accordance with MIL-PRF-49470.

Temperature coefficient: 0 ppm/°C ±30 ppm/°C (BP), ±15 percent (BQ, BR, BX).

Voltage-temperature limits: In accordance with MIL-PRF-49470.

Symbol	Capacitance change with reference to +25°C	
	Step A through step D of voltage-temperature limit cycle table of MIL-PRF-49470	Step E through step G of voltage-temperature limit cycle table of MIL-PRF-49470
BP	0 ppm/°C ± 30 ppm/°C	0 ppm/°C ± 30 ppm/°C
BQ	±15 percent	+15, -50 percent
BR	±15 percent	+15, -40 percent
BX	±15 percent	+15, -25 percent

Marking: In accordance with MIL-PRF-49470.

Body insulation: Not applicable.

Solderability: The leads shall be solderable up to the seating plane.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Part or Identifying Number (PIN) 1/	Capacitance µF	Capacitance tolerance	Characteristic	Case code	Config.	Maximum A dimension inch (mm)
50 V						
-49470P06563-A-	0.056	J, K	BP	5	N, L, J	.270 (8.86)
-49470P06683-A-	0.068	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06823-A-	0.082	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06104-A-	0.1	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06124-A-	0.12	J, K	BP	5	N, L, J	.530 (13.46)
-49470P06154-A-	0.15	J, K	BP	5	N, L, J	.530 (13.46)
-49470P06184-A-	0.18	J, K	BP	5	N, L, J	.660 (16.67)
-49470P06184-A-	0.18	J, K	BP	4	A, B, C	.390 (9.91)
-49470P06224-A-	0.22	J, K	BP	5	N, L, J	.660 (16.67)
-49470P06224-A-	0.22	J, K	BP	4	A, B, C	.390 (9.91)
-49470P06274-A-	0.27	J, K	BP	5	N, L, J	.800 (20.32)
-49470P06274-A-	0.27	J, K	BP	4	A, B, C	.390 (9.91)
-49470P06334-A-	0.33	J, K	BP	4	N, L, J	.530 (13.46)
-49470P06394-A-	0.39	J, K	BP	4	N, L, J	.660 (16.67)
-49470P06474-A-	0.47	J, K	BP	4	N, L, J	.660 (16.67)
-49470P06564-A-	0.56	J, K	BP	4	N, L, J	.800 (20.32)
-49470P06564-A-	0.56	J, K	BP	3	A, B, C	.390 (9.91)
-49470P06684-A-	0.68	J, K	BP	3	N, L, J	.390 (9.91)
-49470P06824-A-	0.82	J, K	BP	3	N, L, J	.390 (9.91)
-49470P06105-A-	1	J, K	BP	3	N, L, J	.530 (13.46)
-49470X06105-A-	1	K, M	BX	5	N, L, J	.270 (6.86)
-49470P06125-A-	1.2	J, K	BP	3	N, L, J	.530 (13.46)
-49470X06125-A-	1.2	K, M	BX	5	N, L, J	.270 (6.86)
-49470P06155-A-	1.5	J, K	BP	3	N, L, J	.600 (16.76)
-49470X06155-A-	1.5	K, M	BX	5	N, L, J	.390 (9.91)
-49470P06185-A-	1.8	J, K	BP	3	N, L, J	.660 (16.67)
-49470X06185-A-	1.8	K, M	BX	5	N, L, J	.390 (9.91)
-49470P06225-A-	2.2	J, K	BP	3	N, L, J	.800 (20.32)
-49470P06225-A-	2.2	J, K	BP	2	A, B, C	.390 (9.91)
-49470X06225-A-	2.2	K, M	BX	5	N, L, J	.390 (9.91)
-49470P06275-A-	2.7	J, K	BP	1	N, L, J	.530 (13.46)
-49470P06275-A-	2.7	J, K	BP	2	A, B, C	.390 (9.91)
-49470X06275-A-	2.7	K, M	BX	5	N, L, J	.530 (13.46)
-49470P06335-A-	3.3	J, K	BP	1	N, L, J	.660 (16.67)
-49470P06335-A-	3.3	J, K	BP	2	A, B, C	.530 (13.46)
-49470X06335-A-	3.3	K, M	BX	5	N, L, J	.530 (13.46)
-49470P06395-A-	3.9	J, K	BP	1	N, L, J	.660 (16.67)
-49470P06395-A-	3.9	J, K	BP	2	A, B, C	.660 (16.67)
-49470X06395-A-	3.9	K, M	BX	5	N, L, J	.660 (16.67)
-49470P06475-A-	4.7	J, K	BP	1	N, L, J	.800 (20.32)
-49470P06475-A-	4.7	J, K	BP	2	A, B, C	.660 (16.67)

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Part or Identifying Number (PIN) 1/	Capacitance µF	Capacitance tolerance	Characteristic	Case code	Config.	Maximum A dimension inch (mm)
50 V						
-49470X06475-A-	4.7	K, M	BX	5	N, L, J	.660 (16.67)
-49470X06475-A-	4.7	K, M	BX	4	A, B, C	.390 (9.91)
-49470P06565-A-	5.6	J, K	BP	2	N, L, J	.800 (20.32)
-49470X06565-A-	5.6	K, M	BX	5	N, L, J	.800 (20.32)
-49470X06565-A-	5.6	K, M	BX	4	A, B, C	.390 (9.91)
-49470P06685-A-	6.8	J, K	BP	6	N, L, J	.530 (13.46)
-49470X06685-A-	6.8	K, M	BX	4	N, L, J	.530 (13.46)
-49470P06825-A-	8.2	J, K	BP	6	N, L, J	.530 (13.46)
-49470X06825-A-	8.2	K, M	BX	4	N, L, J	.530 (13.46)
-49470P06106-A-	10	J, K	BP	6	N, L, J	.660 (16.67)
-49470X06106-A-	10	K, M	BX	4	N, L, J	.660 (16.76)
-49470P06126-A-	12	J, K	BP	6	N, L, J	.660 (16.76)
-49470X06126-A-	12	K, M	BX	4	N, L, J	.660 (16.76)
-49470P06156-A-	15	J, K	BP	6	N, L, J	.800 (20.32)
-49470X06156-A-	15	K, M	BX	4	N, L, J	.800 (20.32)
-49470X06156-A-	15	K, M	BX	3	A, B, C	.390 (9.91)
-49470X06186-A-	18	K, M	BX	3	N, L, J	.390 (9.91)
-49470X06226-A-	22	K, M	BX	3	N, L, J	.530 (13.46)
-49470X06276-A-	27	K, M	BX	3	N, L, J	.530 (13.46)
-49470X06336-A-	33	K, M	BX	3	N, L, J	.530 (13.46)
-49470X06396-A-	39	K, M	BX	3	N, L, J	.660 (16.76)
-49470X06476-A-	47	K, M	BX	3	N, L, J	.800 (20.32)
-49470X06476-A-	47	K, M	BX	2	A, B, C	.390 (9.91)
-49470X06566-A-	56	K, M	BX	1	N, L, J	.530 (13.46)
-49470X06566-A-	56	K, M	BX	2	A, B, C	.390 (9.91)
-49470X06686-A-	68	K, M	BX	1	N, L, J	.660 (16.76)
-49470X06686-A-	68	K, M	BX	2	A, B, C	.530 (13.46)
-49470X06826-A-	82	K, M	BX	1	N, L, J	.660 (16.76)
-49470X06826-A-	82	K, M	BX	2	A, B, C	.530 (13.46)
-49470X06107-A-	100	K, M	BX	1	N, L, J	.800 (20.32)
-49470X06107-A-	100	K, M	BX	2	A, B, C	.660 (16.76)
-49470X06127-A-	120	K, M	BX	2	N, L, J	.660 (16.76)
-49470X06157-A-	150	K, M	BX	2	N, L, J	.800 (20.32)
-49470X06187-A-	180	K, M	BX	6	N, L, J	.660 (16.76)
-49470X06227-A-	220	K, M	BX	6	N, L, J	.660 (16.76)
-49470X06277-A-	270	K, M	BX	6	N, L, J	.800 (20.32)
100 V						
-49470P06473-B-	0.047	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06563-B-	0.056	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06683-B-	0.068	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06823-B-	0.082	J, K	BP	5	N, L, J	.530 (13.46)

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Part or Identifying Number (PIN) 1/	Capacitance µF	Capacitance tolerance	Characteristic	Case code	Config.	Maximum A dimension inch (mm)
100 V						
-49470P06104-B-	0.1	J, K	BP	5	N, L, J	.530 (13.46)
-49470P06124-B-	0.12	J, K	BP	5	N, L, J	.530 (13.46)
-49470P06154-B-	0.15	J, K	BP	5	N, L, J	.660 (16.76)
-49470P06154-B-	0.15	J, K	BP	4	A, B, C	.390 (9.91)
-49470P06184-B-	0.18	J, K	BP	5	N, L, J	.800 (20.32)
-49470P06184-B-	0.18	J, K	BP	4	A, B, C	.390 (9.91)
-49470P06224-B-	0.22	J, K	BP	5	N, L, J	.800 (20.32)
-49470P06224-B-	0.22	J, K	BP	4	A, B, C	.390 (9.91)
-49470P06274-B-	0.27	J, K	BP	4	N, L, J	.530 (13.46)
-49470P06334-B-	0.33	J, K	BP	4	N, L, J	.660 (16.76)
-49470P06394-B-	0.39	J, K	BP	4	N, L, J	.660 (16.76)
-49470P06474-B-	0.47	J, K	BP	4	N, L, J	.800 (20.32)
-49470P06474-B-	0.47	J, K	BP	3	A, B, C	.390 (9.91)
-49470P06564-B-	0.56	J, K	BP	4	N, L, J	.800 (20.32)
-49470P06564-B-	0.56	J, K	BP	3	A, B, C	.390 (9.91)
-49470P06684-B-	0.68	J, K	BP	3	N, L, J	.390 (9.91)
-49470X06684-B-	0.68	K, M	BX	5	N, L, J	.270 (6.86)
-49470P06824-B-	0.82	J, K	BP	3	N, L, J	.530 (13.46)
-49470X06824-B-	0.82	K, M	BX	5	N, L, J	.390 (9.91)
-49470P06105-B-	1	J, K	BP	3	N, L, J	.530 (13.46)
-49470X06105-B-	1	K, M	BX	5	N, L, J	.390 (9.91)
-49470P06125-B-	1.2	J, K	BP	3	N, L, J	.660 (16.76)
-49470X06125-B-	1.2	K, M	BX	5	N, L, J	.390 (9.91)
-49470P06155-B-	1.5	J, K	BP	3	N, L, J	.660 (16.76)
-49470X06155-B-	1.5	K, M	BX	5	N, L, J	.530 (13.46)
-49470P06185-B-	1.8	J, K	BP	3	N, L, J	.800 (20.32)
-49470P06185-B-	1.8	J, K	BP	2	A, B, C	.390 (9.91)
-49470X06185-B-	1.8	K, M	BX	5	N, L, J	.530 (13.46)
-49470P06225-B-	2.2	J, K	BP	1	N, L, J	.660 (16.76)
-49470X06225-B-	2.2	K, M	BX	5	N, L, J	.660 (16.76)
-49470X06225-B-	2.2	K, M	BX	4	A, B, C	.390 (9.91)
-49470P06275-B-	2.7	J, K	BP	1	N, L, J	.660 (16.76)
-49470X06275-B-	2.7	K, M	BX	5	N, L, J	.660 (16.76)
-49470P06335-B-	3.3	J, K	BP	1	N, L, J	.800 (20.32)
-49470P06335-B-	3.3	J, K	BP	2	A, B, C	.390 (9.91)
-49470X06335-B-	3.3	K, M	BX	5	N, L, J	.800 (20.32)
-49470X06335-B-	3.3	K, M	BX	4	A, B, C	.390 (9.91)
-49470P06395-B-	3.9	J, K	BP	2	N, L, J	.660 (16.76)
-49470X06395-B-	3.9	K, M	BX	4	N, L, J	.530 (13.46)
-49470P06475-B-	4.7	J, K	BP	2	N, L, J	.800 (20.32)
-49470X06475-B-	4.7	K, M	BX	4	N, L, J	.530 (13.46)

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Part or Identifying Number (PIN) 1/	Capacitance µF	Capacitance tolerance	Characteristic	Case code	Config.	Maximum A dimension inch (mm)
100 V						
-49470P06565-B-	5.6	J, K	BP	6	N, L, J	.530 (13.46)
-49470X06565-B-	5.6	K, M	BX	4	N, L, J	.660 (16.76)
-49470P06685-B-	6.8	J, K	BP	6	N, L, J	.530 (13.46)
-49470X06685-B-	6.8	K, M	BX	4	N, L, J	.660 (16.76)
-49470P06825-B-	8.2	J, K	BP	6	N, L, J	.660 (16.76)
-49470X06825-B-	8.2	K, M	BX	4	N, L, J	.800 (20.32)
-49470X06825-B-	8.2	K, M	BX	3	A, B, C	.390 (9.91)
-49470P06106-B-	10	J, K	BP	6	N, L, J	.800 (20.32)
-49470X06106-B-	10	K, M	BX	3	N, L, J	.390 (9.91)
-49470P06126-B-	12	J, K	BP	6	N, L, J	.800 (20.32)
-49470X06126-B-	12	K, M	BX	3	N, L, J	.390 (9.91)
-49470X06156-B-	15	K, M	BX	3	N, L, J	.530 (13.46)
-49470X06186-B-	18	K, M	BX	3	N, L, J	.530 (13.46)
-49470X06226-B-	22	K, M	BX	3	N, L, J	.660 (16.76)
-49470X06276-B-	27	K, M	BX	3	N, L, J	.800 (20.32)
-49470X06276-B-	27	K, M	BX	2	A, B, C	.390 (9.91)
-49470X06336-B-	33	K, M	BX	1	N, L, J	.530 (13.46)
-49470X06336-B-	33	K, M	BX	2	A, B, C	.390 (9.91)
-49470X06396-B-	39	K, M	BX	1	N, L, J	.660 (16.76)
-49470X06396-B-	39	K, M	BX	2	A, B, C	.530 (13.46)
-49470X06476-B-	47	K, M	BX	1	N, L, J	.660 (16.76)
-49470X06476-B-	47	K, M	BX	2	A, B, C	.530 (13.46)
-49470X06566-B-	56	K, M	BX	1	N, L, J	.800 (20.32)
-49470X06686-B-	68	K, M	BX	2	N, L, J	.660 (16.76)
-49470X06826-B-	82	K, M	BX	2	N, L, J	.800 (20.32)
-49470X06107-B-	100	K, M	BX	6	N, L, J	.530 (13.46)
-49470X06127-B-	120	K, M	BX	6	N, L, J	.530 (13.46)
-49470X06157-B-	150	K, M	BX	6	N, L, J	.660 (16.76)
-49470X06187-B-	180	K, M	BX	6	N, L, J	.800 (20.32)
200V						
-49470P06223-C-	0.022	J, K	BP	5	N, L, J	.270 (6.86)
-49470P06273-C-	0.027	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06333-C-	0.033	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06393-C-	0.039	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06473-C-	0.047	J, K	BP	5	N, L, J	.530 (13.46)
-49470P06563-C-	0.056	J, K	BP	5	N, L, J	.530 (13.46)
-49470P06683-C-	0.068	J, K	BP	5	N, L, J	.660 (16.76)
-49470P06683-C-	0.068	J, K	BP	4	A, B, C	.270 (6.86)
-49470P06823-C-	0.082	J, K	BP	5	N, L, J	.800 (20.32)
-49470P06823-C-	0.082	J, K	BP	4	A, B, C	.390 (9.91)

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Part or Identifying Number (PIN) 1/	Capacitance µF	Capacitance tolerance	Characteristic	Case code	Config.	Maximum A dimension inch (mm)
200 V						
-49470P06104-C-	0.1	J, K	BP	5	N, L, J	.800 (20.32)
-49470P06104-C-	0.1	J, K	BP	4	A, B, C	.390 (9.91)
-49470P06124-C-	0.12	J, K	BP	4	N, L, J	.530 (13.46)
-49470P06154-C-	0.15	J, K	BP	4	N, L, J	.530 (13.46)
-49470P06184-C-	0.18	J, K	BP	4	N, L, J	.660 (16.76)
-49470P06224-C-	0.22	J, K	BP	4	N, L, J	.800 (20.32)
-49470P06274-C-	0.27	J, K	BP	4	N, L, J	.800 (20.32)
-49470P06274-C-	0.27	J, K	BP	3	A, B, C	.390 (9.91)
-49470P06334-C-	0.33	J, K	BP	3	N, L, J	.390 (9.91)
-49470P06394-C-	0.39	J, K	BP	3	N, L, J	.390 (9.91)
-49470P06474-C-	0.47	J, K	BP	3	N, L, J	.530 (13.46)
-49470R06474-C-	0.47	K, M	BR	5	N, L, J	.390 (9.91)
-49470P06564-C-	0.56	J, K	BP	3	N, L, J	.530 (13.46)
-49470R06564-C-	0.56	K, M	BR	5	N, L, J	.390 (9.91)
-49470P06684-C-	0.68	J, K	BP	3	N, L, J	.660 (16.76)
-49470R06684-C-	0.68	K, M	BR	5	N, L, J	.530 (13.46)
-49470P06824-C-	0.82	J, K	BP	3	N, L, J	.800 (20.32)
-49470P06824-C-	0.82	J, K	BP	2	A, B, C	.390 (9.91)
-49470R06824-C-	0.82	K, M	BR	5	N, L, J	.530 (13.46)
-49470P06105-C-	1	J, K	BP	3	N, L, J	.800 (20.32)
-49470P06105-C-	1	J, K	BP	2	A, B, C	.390 (9.91)
-49470R06105-C-	1	K, M	BR	5	N, L, J	.660 (16.76)
-49470R06105-C-	1	K, M	BR	4	A, B, C	.270 (6.86)
-49470P06125-C-	1.2	J, K	BP	1	N, L, J	.660 (16.76)
-49470P06125-C-	1.2	J, K	BP	2	A, B, C	.530 (13.46)
-49470R06125-C-	1.2	K, M	BR	5	N, L, J	.660 (16.76)
-49470R06125-C-	1.2	K, M	BR	4	A, B, C	.390 (9.91)
-49470P06155-C-	1.5	J, K	BP	1	N, L, J	.660 (16.76)
-49470P06155-C-	1.5	J, K	BP	2	A, B, C	.530 (13.46)
-49470R06155-C-	1.5	K, M	BR	5	N, L, J	.800 (20.32)
-49470R06155-C-	1.5	K, M	BR	4	A, B, C	.390 (9.91)
-49470P06185-C-	1.8	J, K	BP	1	N, L, J	.800 (20.32)
-49470P06185-C-	1.8	J, K	BP	2	A, B, C	.660 (16.76)
-49470R06185-C-	1.8	K, M	BR	4	N, L, J	.530 (13.46)
-49470P06225-C-	2.2	J, K	BP	2	N, L, J	.660 (16.76)
-49470R06225-C-	2.2	K, M	BR	4	N, L, J	.530 (13.46)
-49470P06275-C-	2.7	J, K	BP	2	N, L, J	.800 (20.32)
-49470R06275-C-	2.7	K, M	BR	4	N, L, J	.660 (16.76)
-49470P06335-C-	3.3	J, K	BP	6	N, L, J	.530 (13.46)
-49470R06335-C-	3.3	K, M	BR	4	N, L, J	.660 (16.76)
-49470P06395-C-	3.9	J, K	BP	6	N, L, J	.530 (13.46)

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Part or Identifying Number (PIN) 1/	Capacitance µF	Capacitance tolerance	Characteristic	Case code	Config.	Maximum A dimension inch (mm)
200 V						
-49470R06395-C-	3.9	K, M	BR	4	N, L, J	.800 (20.32)
-49470R06395-C-	3.9	K, M	BR	3	A, B, C	.390 (9.91)
-49470P06475-C-	4.7	J, K	BP	6	N, L, J	.660 (16.76)
-49470R06475-C-	4.7	K, M	BR	3	N, L, J	.390 (9.91)
-49470P06565-C-	5.6	J, K	BP	6	N, L, J	.800 (20.32)
-49470R06565-C-	5.6	K, M	BR	3	N, L, J	.390 (9.91)
-49470R06685-C-	6.8	K, M	BR	3	N, L, J	.530 (13.46)
-49470R06825-C-	8.2	K, M	BR	3	N, L, J	.530 (13.46)
-49470R06106-C-	10	K, M	BR	3	N, L, J	.660 (16.76)
-49470R06126-C-	12	K, M	BR	3	N, L, J	.800 (20.32)
-49470R06126-C-	12	K, M	BR	2	A, B, C	.390 (9.91)
-49470R06156-C-	15	K, M	BR	1	N, L, J	.530 (13.46)
-49470R06156-C-	15	K, M	BR	2	A, B, C	.390 (9.91)
-49470R06186-C-	18	K, M	BR	1	N, L, J	.660 (16.76)
-49470R06186-C-	18	K, M	BR	2	A, B, C	.530 (13.46)
-49470R06226-C-	22	K, M	BR	1	N, L, J	.800 (20.32)
-49470R06226-C-	22	K, M	BR	2	A, B, C	.530 (13.46)
-49470R06276-C-	27	K, M	BR	1	N, L, J	.800 (20.32)
-49470R06276-C-	27	K, M	BR	2	A, B, C	.660 (16.76)
-49470R06336-C-	33	K, M	BR	2	N, L, J	.660 (16.76)
-49470R06396-C-	39	K, M	BR	2	N, L, J	.800 (20.32)
-49470R06476-C-	47	K, M	BR	6	N, L, J	.390 (9.91)
-49470R06566-C-	56	K, M	BR	6	N, L, J	.530 (13.46)
-49470R06686-C-	68	K, M	BR	6	N, L, J	.530 (13.46)
-49470R06826-C-	82	K, M	BR	6	N, L, J	.660 (16.76)
-49470R06107-C-	100	K, M	BR	6	N, L, J	.800 (20.32)
-49470R06127-C-	120	K, M	BR	6	N, L, J	.800 (20.32)
500V						
-49470P06103-E-	0.01	J, K	BP	5	N, L, J	.270 (6.86)
-49470P06123-E-	0.012	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06153-E-	0.015	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06183-E-	0.018	J, K	BP	5	N, L, J	.390 (9.91)
-49470P06223-E-	0.022	J, K	BP	5	N, L, J	.530 (13.46)
-49470P06273-E-	0.027	J, K	BP	5	N, L, J	.530 (13.46)
-49470P06333-E-	0.033	J, K	BP	5	N, L, J	.660 (16.76)
-49470P06333-E-	0.033	J, K	BP	4	A, B, C	.390 (9.91)
-49470P06393-E-	0.039	J, K	BP	5	N, L, J	.660 (16.76)
-49470P06393-E-	0.039	J, K	BP	4	A, B, C	.390 (9.91)
-49470P06473-E-	0.047	J, K	BP	5	N, L, J	.800 (20.32)
-49470P06473-E-	0.047	J, K	BP	4	A, B, C	.530 (13.46)
-49470P06563-E-	0.056	J, K	BP	4	N, L, J	.530 (13.46)

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Part or Identifying Number (PIN) 1/	Capacitance µF	Capacitance tolerance	Characteristic	Case code	Config.	Maximum A dimension inch (mm)
500 V						
-49470P06683-E-	0.068	J, K	BP	4	N, L, J	.660 (16.76)
-49470P06823-E-	0.082	J, K	BP	4	N, L, J	.800 (20.32)
-49470P06104-E-	0.1	J, K	BP	4	N, L, J	.800 (20.32)
-49470P06124-E-	0.12	J, K	BP	4	N, L, J	.800 (20.32)
-49470P06124-E-	0.12	J, K	BP	3	A, B, C	.390 (9.91)
-49470P06154-E-	0.15	J, K	BP	3	N, L, J	.390 (9.91)
-49470Q06154-E-	0.15	K, M	BQ	5	N, L, J	.270 (6.86)
-49470P06184-E-	0.18	J, K	BP	3	N, L, J	.390 (9.91)
-49470Q06184-E-	0.18	K, M	BQ	5	N, L, J	.390 (9.91)
-49470P06224-E-	0.22	J, K	BP	3	N, L, J	.530 (13.46)
-49470Q06224-E-	0.22	K, M	BQ	5	N, L, J	.390 (9.91)
-49470P06274-E-	0.27	J, K	BP	3	N, L, J	.530 (13.46)
-49470Q06274-E-	0.27	K, M	BQ	5	N, L, J	.390 (9.91)
-49470P06334-E-	0.33	J, K	BP	3	N, L, J	.660 (16.76)
-49470Q06334-E-	0.33	K, M	BQ	5	N, L, J	.530 (13.46)
-49470P06394-E-	0.39	J, K	BP	3	N, L, J	.800 (20.32)
-49470P06394-E-	0.39	J, K	BP	2	A, B, C	.390 (9.91)
-49470Q06394-E-	0.39	K, M	BQ	5	N, L, J	.530 (13.46)
-49470P06474-E-	0.47	J, K	BP	1	N, L, J	.530 (13.46)
-49470P06474-E-	0.47	J, K	BP	2	A, B, C	.390 (9.91)
-49470Q06474-E-	0.47	K, M	BQ	5	N, L, J	.530 (13.46)
-49470P06564-E-	0.56	J, K	BP	1	N, L, J	.660 (16.76)
-49470P06564-E-	0.56	J, K	BP	2	A, B, C	.530 (13.46)
-49470Q06564-E-	0.56	K, M	BQ	5	N, L, J	.660 (16.76)
-49470Q06564-E-	0.56	K, M	BQ	4	A, B, C	.390 (9.91)
-49470P06684-E-	0.68	J, K	BP	1	N, L, J	.660 (16.76)
-49470P06684-E-	0.68	J, K	BP	2	A, B, C	.530 (13.46)
-49470Q06684-E-	0.68	K, M	BQ	5	N, L, J	.800 (20.32)
-49470Q06684-E-	0.68	K, M	BQ	4	A, B, C	.390 (9.91)
-49470P06824-E-	0.82	J, K	BP	1	N, L, J	.800 (20.32)
-49470P06824-E-	0.82	J, K	BP	2	A, B, C	.660 (16.76)
-49470Q06824-E-	0.82	K, M	BQ	4	N, L, J	.530 (13.46)
-49470P06105-E-	1	J, K	BP	2	N, L, J	.660 (16.76)
-49470Q06105-E-	1	K, M	BQ	4	N, L, J	.530 (13.46)
-49470P06125-E-	1.2	J, K	BP	2	N, L, J	.800 (20.32)
-49470Q06125-E-	1.2	K, M	BQ	4	N, L, J	.530 (13.46)
-49470P06155-E-	1.5	J, K	BP	6	N, L, J	.530 (13.46)
-49470Q06155-E-	1.5	K, M	BQ	4	N, L, J	.660 (16.76)
-49470P06185-E-	1.8	J, K	BP	6	N, L, J	.660 (16.76)
-49470Q06185-E-	1.8	K, M	BQ	4	N, L, J	.800 (20.32)
-49470Q06185-E-	1.8	K, M	BQ	3	A, B, C	.390 (9.91)

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

Part or Identifying Number (PIN) 1/	Capacitance µF	Capacitance tolerance	Characteristic	Case code	Config.	Maximum A dimension inch (mm)
500 V						
-49470P03225-E-	2.2	J, K	BP	6	N, L, J	.800 (20.32)
-49470Q06225-E-	2.2	K, M	BQ	3	N, L, J	.390 (9.91)
-49470Q06275-E-	2.7	K, M	BQ	3	N, L, J	.530 (13.46)
-49470Q06335-E-	3.3	K, M	BQ	3	N, L, J	.530 (13.46)
-49470Q06395-E-	3.9	K, M	BQ	3	N, L, J	.530 (13.46)
-49470Q06475-E-	4.7	K, M	BQ	3	N, L, J	.660 (16.76)
-49470Q06565-E-	5.6	K, M	BQ	3	N, L, J	.800 (20.32)
-49470Q06565-E-	5.6	K, M	BQ	2	A, B, C	.390 (9.91)
-49470Q06685-E-	6.8	K, M	BQ	1	N, L, J	.660 (16.76)
-49470Q06685-E-	6.8	K, M	BQ	2	A, B, C	.390 (9.91)
-49470Q06825-E-	8.2	K, M	BQ	1	N, L, J	.660 (16.76)
-49470Q06825-E-	8.2	K, M	BQ	2	A, B, C	.530 (13.46)
-49470Q06106-E-	10	K, M	BQ	1	N, L, J	.660 (16.76)
-49470Q06106-E-	10	K, M	BQ	2	A, B, C	.530 (13.46)
-49470Q06126-E-	12	K, M	BQ	1	N, L, J	.800 (20.32)
-49470Q06126-E-	12	K, M	BQ	2	A, B, C	.660 (16.76)
-49470Q06156-E-	15	K, M	BQ	2	N, L, J	.800 (20.32)
-49470Q06186-E-	18	K, M	BQ	2	N, L, J	.800 (20.32)
-49470Q06226-E-	22	K, M	BQ	6	N, L, J	.530 (13.46)
-49470Q06276-E-	27	K, M	BQ	6	N, L, J	.530 (13.46)
-49470Q06336-E-	33	K, M	BQ	6	N, L, J	.660 (16.76)
-49470Q06396-E-	39	K, M	BQ	6	N, L, J	.800 (20.32)

1/ Complete PIN shall include additional symbols to indicate product level (M for B level, or T for T level), capacitance tolerance and configuration.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
NASA - NA
DLA - CC

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - MC
Air Force - 19, 99

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5910-2052-06)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:11Z
Check the source to verify that this is the current version before use.