INCH-POUND


MIL-PRF-55339/6B
w/AMENDMENT 1
16 February 2018
SUPERSEDING
MIL-PRF-55339/6B
25 August 2004


PERFORMANCE SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY, (WITHIN SERIES N), CLASS 2, "T" PLUG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-55339.

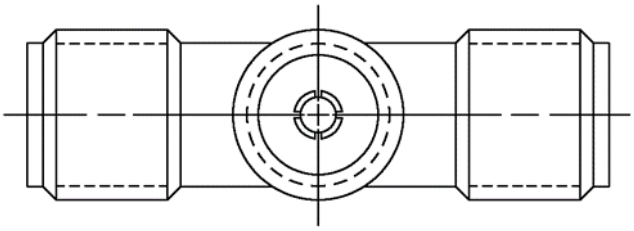

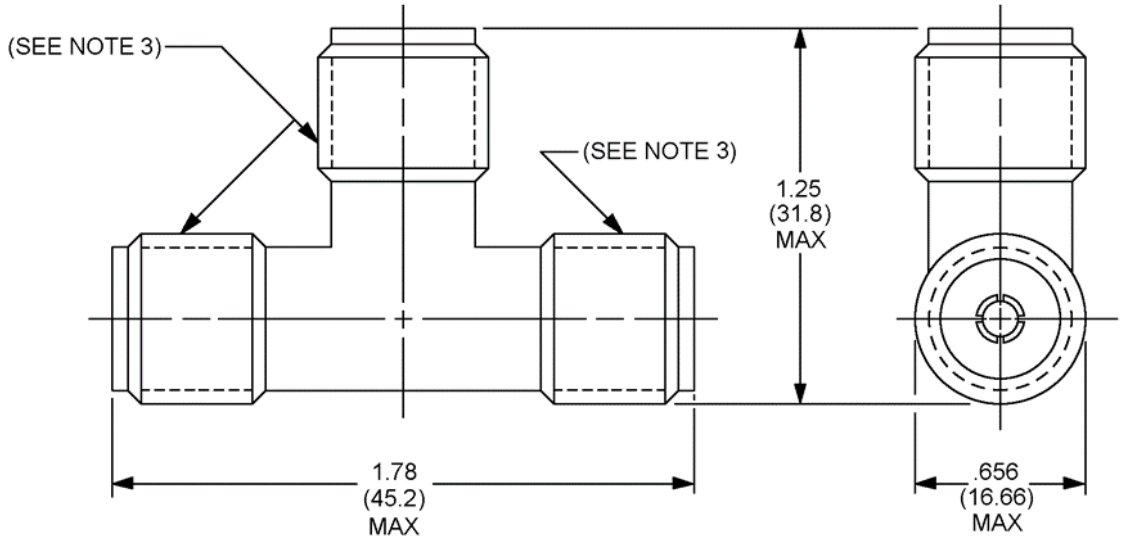


Part or Identifying Number (PIN): M55339/06-00028 or M55339/06-70001

FIGURE 1. General configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:04Z
Check the source to verify that this is the current version before use.

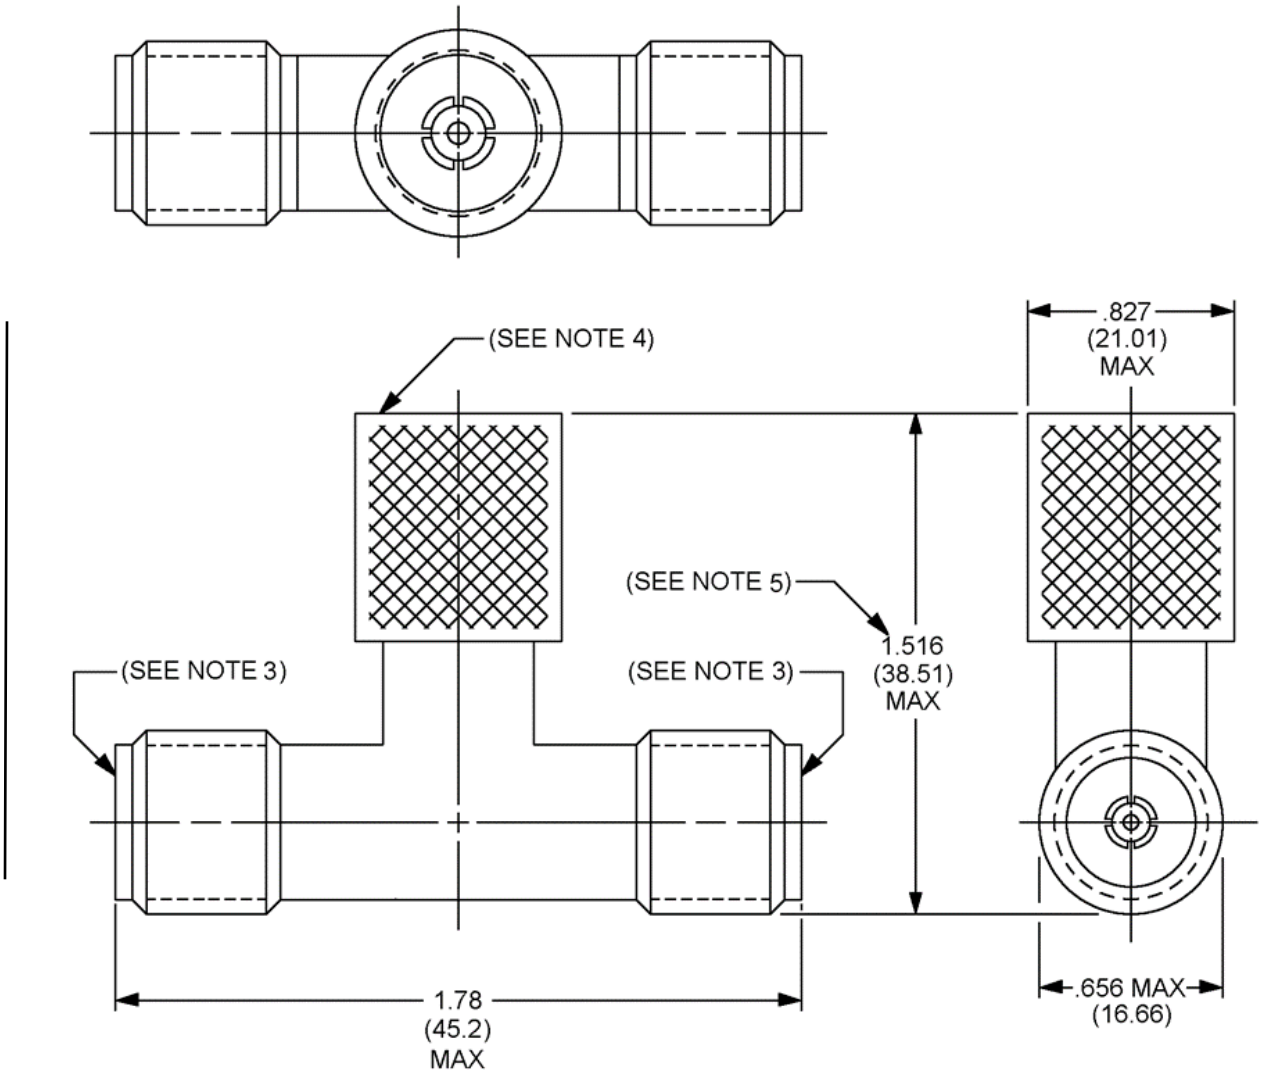

PIN: M55339/06-00001 or M55339/06-70002

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. All undimensioned pictorial representations are for reference purposes only.
3. N interface, socket contact, in accordance with MIL-STD-348.
4. N interface, pin contact, in accordance with MIL-STD-348.
5. Maximum dimension applies when the coupling nut is biased forward.

FIGURE 1. General configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:04Z
Check the source to verify that this is the current version before use.

Design and construction:

Dimensions and configurations: See figure 1 and MIL-STD-348.

Impedance: 50 ohms, nominal.

Working voltage:

Sea level: 1,000 V rms.
70,000 feet (4.437 kPa): 250 V rms.

Frequency range: Not applicable.

Temperature range: -65° to +165°C.

PERFORMANCE REQUIREMENTS (installation torque of 6 to 10 inch-pounds (0.68 to 1.13 Nm))

Center contact retention:
Axial force: 6 pounds (26.69 N) minimum.
Torque: 4 inch-ounces (0.03 Nm), minimum.

Force to engage and disengage:
Longitudinal force: Not applicable.
Torque: 6 inch-pounds (0.68 Nm), maximum.

Coupling proof torque: Not applicable.

Mating characteristics:
Center contact (socket):
Oversize test pin diameter: .074 inch (1.88 mm), minimum.
Insertion depth: .125 inch (3.18 mm), minimum.
Number of insertions: 1.

Maximum test pin (insertion force test):
Steel test pin diameter: .066 inch (1.68 mm), minimum.
Pin finish: 16 microinches (0.41 μm).
Insertion force: 2 pounds (8.89 N), maximum.
Number of insertions: 1.

Minimum test pin (withdrawal force):
Steel test pin diameter: .063 inch (1.60 mm), maximum.
Pin finish: 16 microinches (0.41 μm).
Withdrawal force: 2 ounces (0.56 N), minimum.
Number of withdrawals: 1.

Outer contact:
Minimum test ring inner diameter: .316 in. (8.03 mm), maximum.
Ring finish: 16 microinches (0.41 μm).
Insertion force: 25 pounds (111.2 N), maximum.
Insertion depth: .093 inch (2.63 mm), minimum.
Number of insertions: 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:04Z
Check the source to verify that this is the current version before use.

Maximum test ring inner diameter: .324 inch (8.23 mm), minimum.
Test ring finish: 16 microinches (0.41 μm).22
Insertion depth: .031 inch (0.79 mm), maximum.
Number of insertions: 1.

Permeability: <2.0.

Seal: Hermetic: Not applicable.
Pressurized: Not applicable.
Weatherproof: Not applicable.

Insulation resistance: 5,000 megohms, minimum.

VSWR: Not applicable.

RF leakage (total): Not applicable.

RF insertion loss: Not applicable.

Durability: 500 cycles minimum at 12 cycles/min, maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Dielectric withstanding: Test voltage: 2,500 V rms, minimum (sea level).

Contact resistance (milliohms, maximum):

Contact	Initial	After environment
Center	2.5	3.0
Outer	0.2	N/A
Outer (-70001, -70002)	0.4	N/A

Vibration, high frequency:
Interruptions: 1 μs, max.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, minimum.

Corona level:
Voltage: 500 V, minimum.
Altitude: 70,000 feet (4.437 kPa), minimum.

RF high potential withstanding voltage:
RF voltage: 1,500 V rms, minimum.
Frequency: 5 MHz, minimum.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: 100 pounds (4447.82 N), minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:04Z
Check the source to verify that this is the current version before use.

PIN: M55339/06-00028, M55339/06-00001, M55339/06-70001 and M55339/06-70002.

PIN: M55339/06-70001 and M55339/06-70002. **CAUTION: THESE PARTS HAVE A NICKEL PLATED BODY AND ARE NOT FOR USE IN APPLICATIONS WHERE PASSIVE INTERMODULATION GENERATION (PIM) MAY BE A CONCERN.**

Cross reference: See table I.

TABLE I. Cross reference of PIN.

PIN	Superseded PIN or type designation 1/
M55339/06-00028	MS15506 REB49077 UG-28A/U
M55339/06-00001	REB49080 UG-107B/U

1/ The superseded PIN or the type designation is for cross reference only. Where a superseded PIN or type designation is not given, none was assigned or will be assigned. The PIN: M55339/06-00028 and M55339/06-00001 shall be used in all cases for marking and identifying the adapter.

Group qualifications: See table II.

TABLE II. Group qualifications.

Group	Submission and qualification of any of the following connectors	Qualifies the following connectors
I	M55339/06-00001 M55339/06-00028	M55339/06-00001 and M55339/06-00028

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-55339, this document references the following:

MIL-STD-348

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:04Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2018-030)

Review activities:
Army – AR, AT, MI
Navy – AS, MC, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:04Z
Check the source to verify that this is the current version before use.