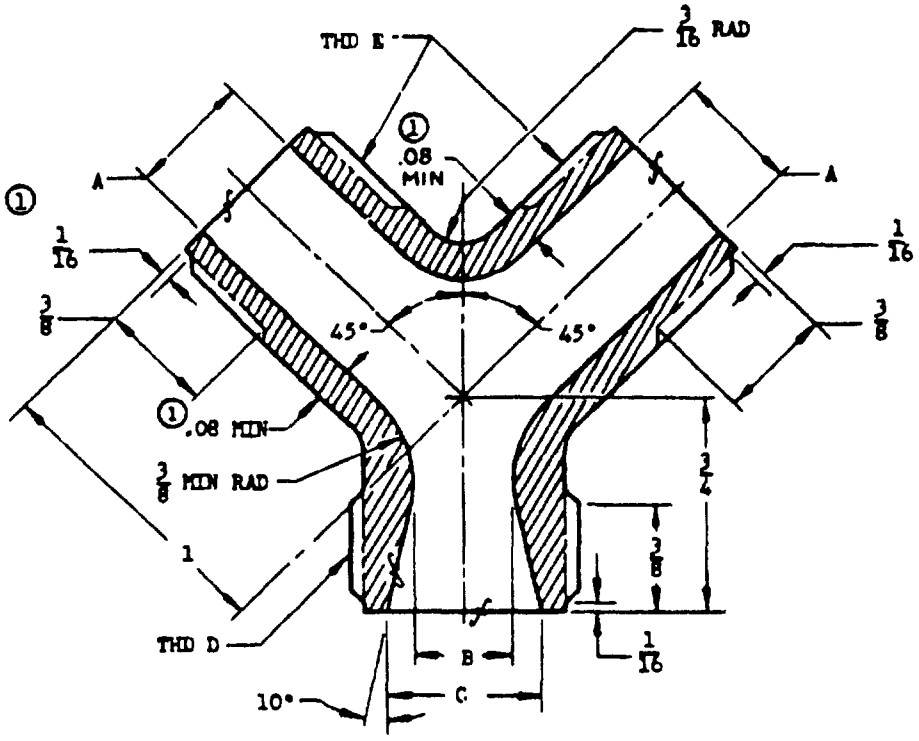


AN PART NO.		A DIA	B DIA	C DIA	THD D	THD E
ALUM. ALLOY	BRASS					
AN3250DD1	AN3250B1	.395	.354	.519	3/4-20 NEF-2	5/8-24 NEF-2
AN3250DD2	AN3250B2	.557	.510	.669	7/8-20 NEF-2	3/4-20 NEF-2

(1) MATERIAL: BRASS, SPEC. QQ-B-611, QQ-B-621; OR ALUMINUM ALLOY, SPEC. AN-A-36, AN-A-5 OR AN-A-38 COMP AL-13, AL-13X, AL-85 OR AL-85X.

(1) FOR GOVERNMENT PROCUREMENT, DIP AN3250DD1, AN3250DD2 IN MELTED PETROLATUM, SPEC. AN-P-51 AFTER MANUFACTURE.

FINISH: BRASS, CADMIUM PLATE, SPEC. AN-P-61.
THE SURFACE FINISH SHALL BE SMOOTH WHERE SHOWN "$\sqrt{}$".

THREADS SHALL BE IN ACCORDANCE WITH SPECIFICATION AN-S-126.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±0.005, ANGLES ±1/2°.

APPROVED 4 Dec 45 REVISED (1) 9 Apr 47

PROCUREMENT SPECIFICATION	ARMY-NAVY AERONAUTICAL STANDARD	AN3250
NONE	COUPLING - CONDUIT Y	

SUPERSEDES NAF 1161, BUAER K1100 AND K1145

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:19Z
Check the source to verify that this is the current version before use.