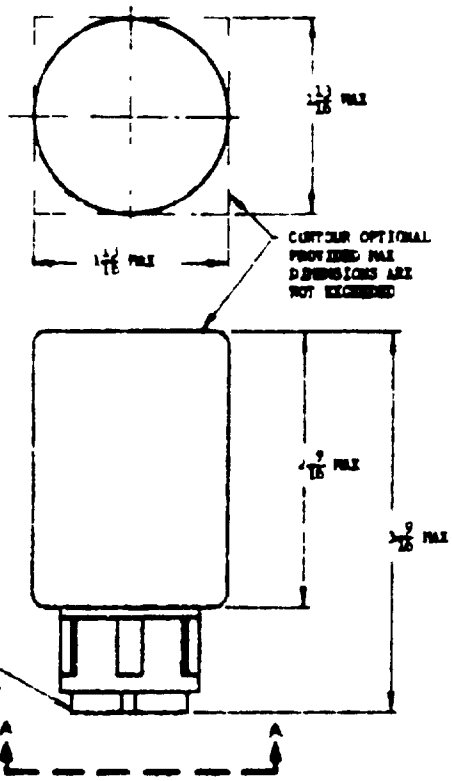



VIEW A-A

DETAIL REQUIREMENTS

(A) MAXIMUM OPERATING VOLTAGE 29 VOLTS
(B) PICKUP VOLTAGE 14 VOLTS
(C) DROPOUT VOLTAGE 7 VOLTS +, -5.5
(D) RATED LOAD: (PER POLE)

RESISTIVE (A-C 400-CYCLE, 115 VOLTS)	NORMALLY OPEN	NORMALLY CLOSED
	10 AMP	10 AMP
RESISTIVE (DC)	10 AMP	10 AMP
INDUCTIVE	10 AMP	10 AMP
MOTOR	6 AMP	6 AMP

(E) COIL CURRENT 0.35 AMP MAX
(F) MINIMUM OPERATING PERIOD 3 HOURS
(G) MINIMUM OPERATING CYCLES 50,000
(H) MAXIMUM WEIGHT 0.5 POUND
(I) RATED DUTY CONTINUOUS
(J) NOMINAL COIL VOLTAGE 26 VOLTS



CIRCUIT

AN PART NO.
AN3306-1
AN3306-2

(4) PART NUMBER AN3306-1 RELAY SHALL BE EQUIPPED WITH GLASS TO METAL SEALED ELECTRICAL CONNECTOR
(5) PART NUMBER AN3306-2 RELAY SHALL MEET MINIMUM CURRENT REQUIREMENTS ESTABLISHED IN THE PROCUREMENT SPECIFICATION

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ± .005

OVERLOAD RUPTURE, AND CONTACT DROP TESTS OF SPECIFICATION MIL-R-6106 ARE NOT APPLICABLE TO PART NUMBER AN3306-1 RELAY

INACTIVE FOR DESIGN AFTER 17 NOV 1954 NO SUPERSEDING STANDARD

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ASA BULLETIN NO. 267

APPROVED 2 [illegible] REVISED (1) 15 May 52 (2) 1 Nov 54 (3) 17 Jul 56

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3306
MIL-R-6106	RELAY, 10 AMP, 2PDT, SEALED, CONNECTOR MOUNTING, CLASS D	

SUPERSEDES [illegible] DRAWING [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.