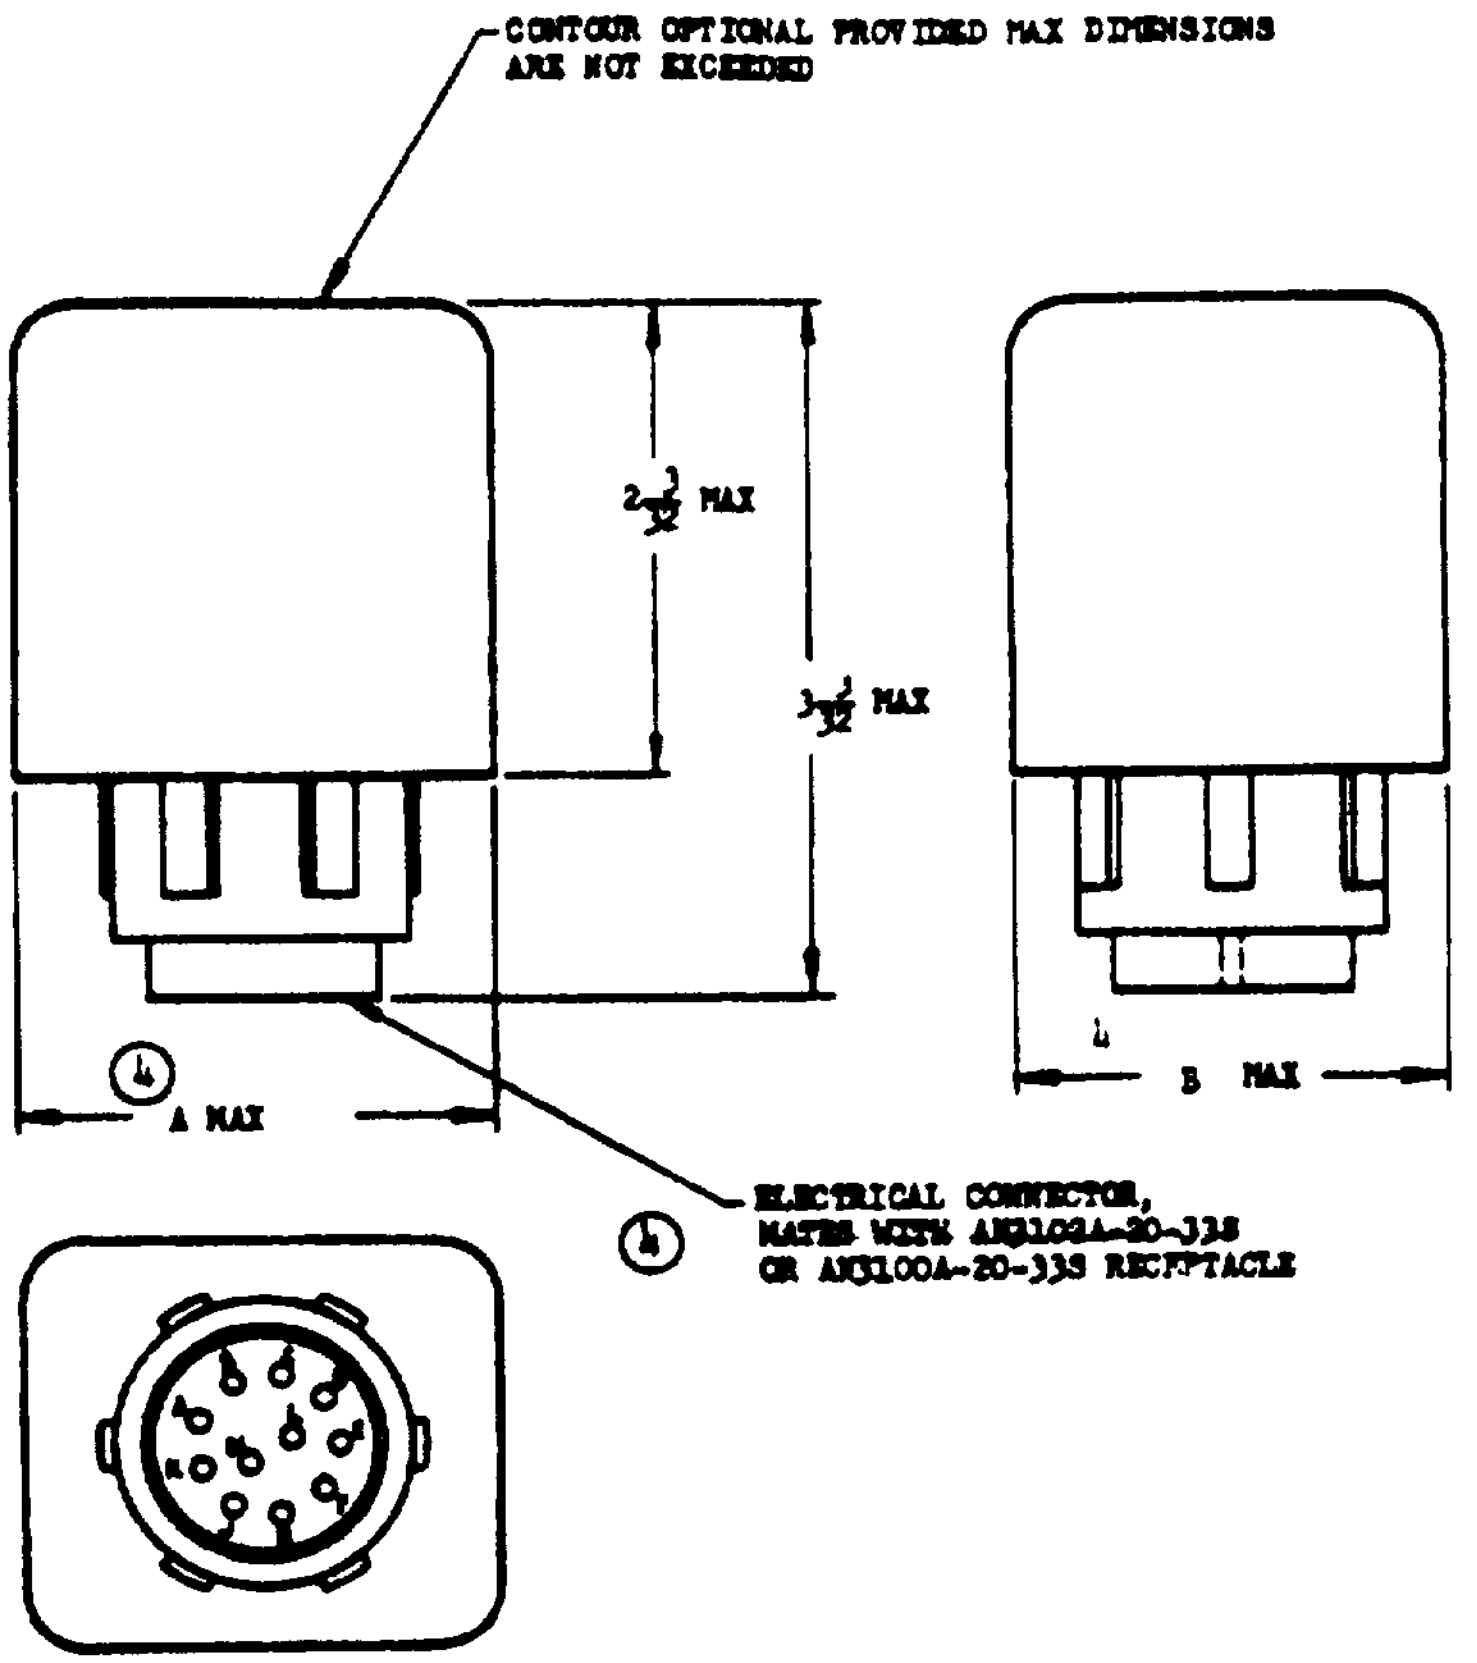
CONTOUR OPTIONAL PROVIDED MAX DIMENSIONS ARE NOT EXCEEDED
$2\frac{3}{32}$ MAX
$3\frac{1}{32}$ MAX
④
A MAX
4
B MAX
④
ELECTRICAL CONNECTOR, MATES WITH AN3102A-20-33S OR AN3100A-20-33S RECEPTACLE


C
E
F
J
K
M
A
B
D
H
L

CIRCUIT

DETAIL REQUIREMENTS

(A) MAXIMUM OPERATING VOLTAGE 29 VOLTS
(B) PICKUP VOLTAGE 18 VOLTS
(C) DROPOUT VOLTAGE 7 VOLTS +0, -5.5
(D) RATED LOAD: (PER POLE)

	NORMALLY OPEN	NORMALLY CLOSED
RESISTIVE (A-C 400-CYCLE, 115 VOLTS)	10 AMP	10 AMP
RESISTIVE (DC)	10 AMP	10 AMP
INDUCTIVE	10 AMP	10 AMP
MOTOR	6 AMP	6 AMP

④ (E) COIL CURRENT 0.35 AMP MAX
(F) MINIMUM OPERATING PERIOD 3 HOURS
(G) MINIMUM OPERATING CYCLES 50,000
④ (H) MAXIMUM WEIGHT 0.6 POUND
(I) RATED DUTY CONTINUOUS
(J) NOMINAL COIL VOLTAGE 28 VOLTS

④

AN PART NO.	A (MAX)	B (MAX)
AN3308-1	2-3/32	1-23/32
AN3308-2	2-3/16	1-13/16

INACTIVE FOR DESIGN AFTER 17 NOV 1954 NO SUPERSEDING STANDARD

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED. TOLERANCES FRACTIONS ±1/64, DECIMALS ±.005.

④ OVERLOAD, RUPTURE, AND CONTACT DROP TESTS OF SPECIFICATION MIL-R-6106 ARE NOT APPLICABLE TO PART NUMBER AN3308-1 RELAY PART NUMBER AN3308-2 RELAY SHALL BE EQUIPPED WITH GLASS TO METAL SEALED ELECTRICAL CONNECTOR. PART NUMBER AN3308-2 RELAY SHALL MEET MINIMUM CURRENT REQUIREMENTS ESTABLISHED IN THE PROCUREMENT SPECIFICATION.

NOTE: [illegible]

APPROVED 24 Apr 50 REVISED ① 28 Jul 52 ② 17 Nov 54 ③ 10 Apr 56 ④ 27 Jul 58

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3308
MIL-R-6106	RELAY, 10 AMP, 3PDT, SEALED, CONNECTOR MOUNTING, CLASS O	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.