NOTICE: When Government drawings, specifications, or other data are used [illegible]

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments [illegible]

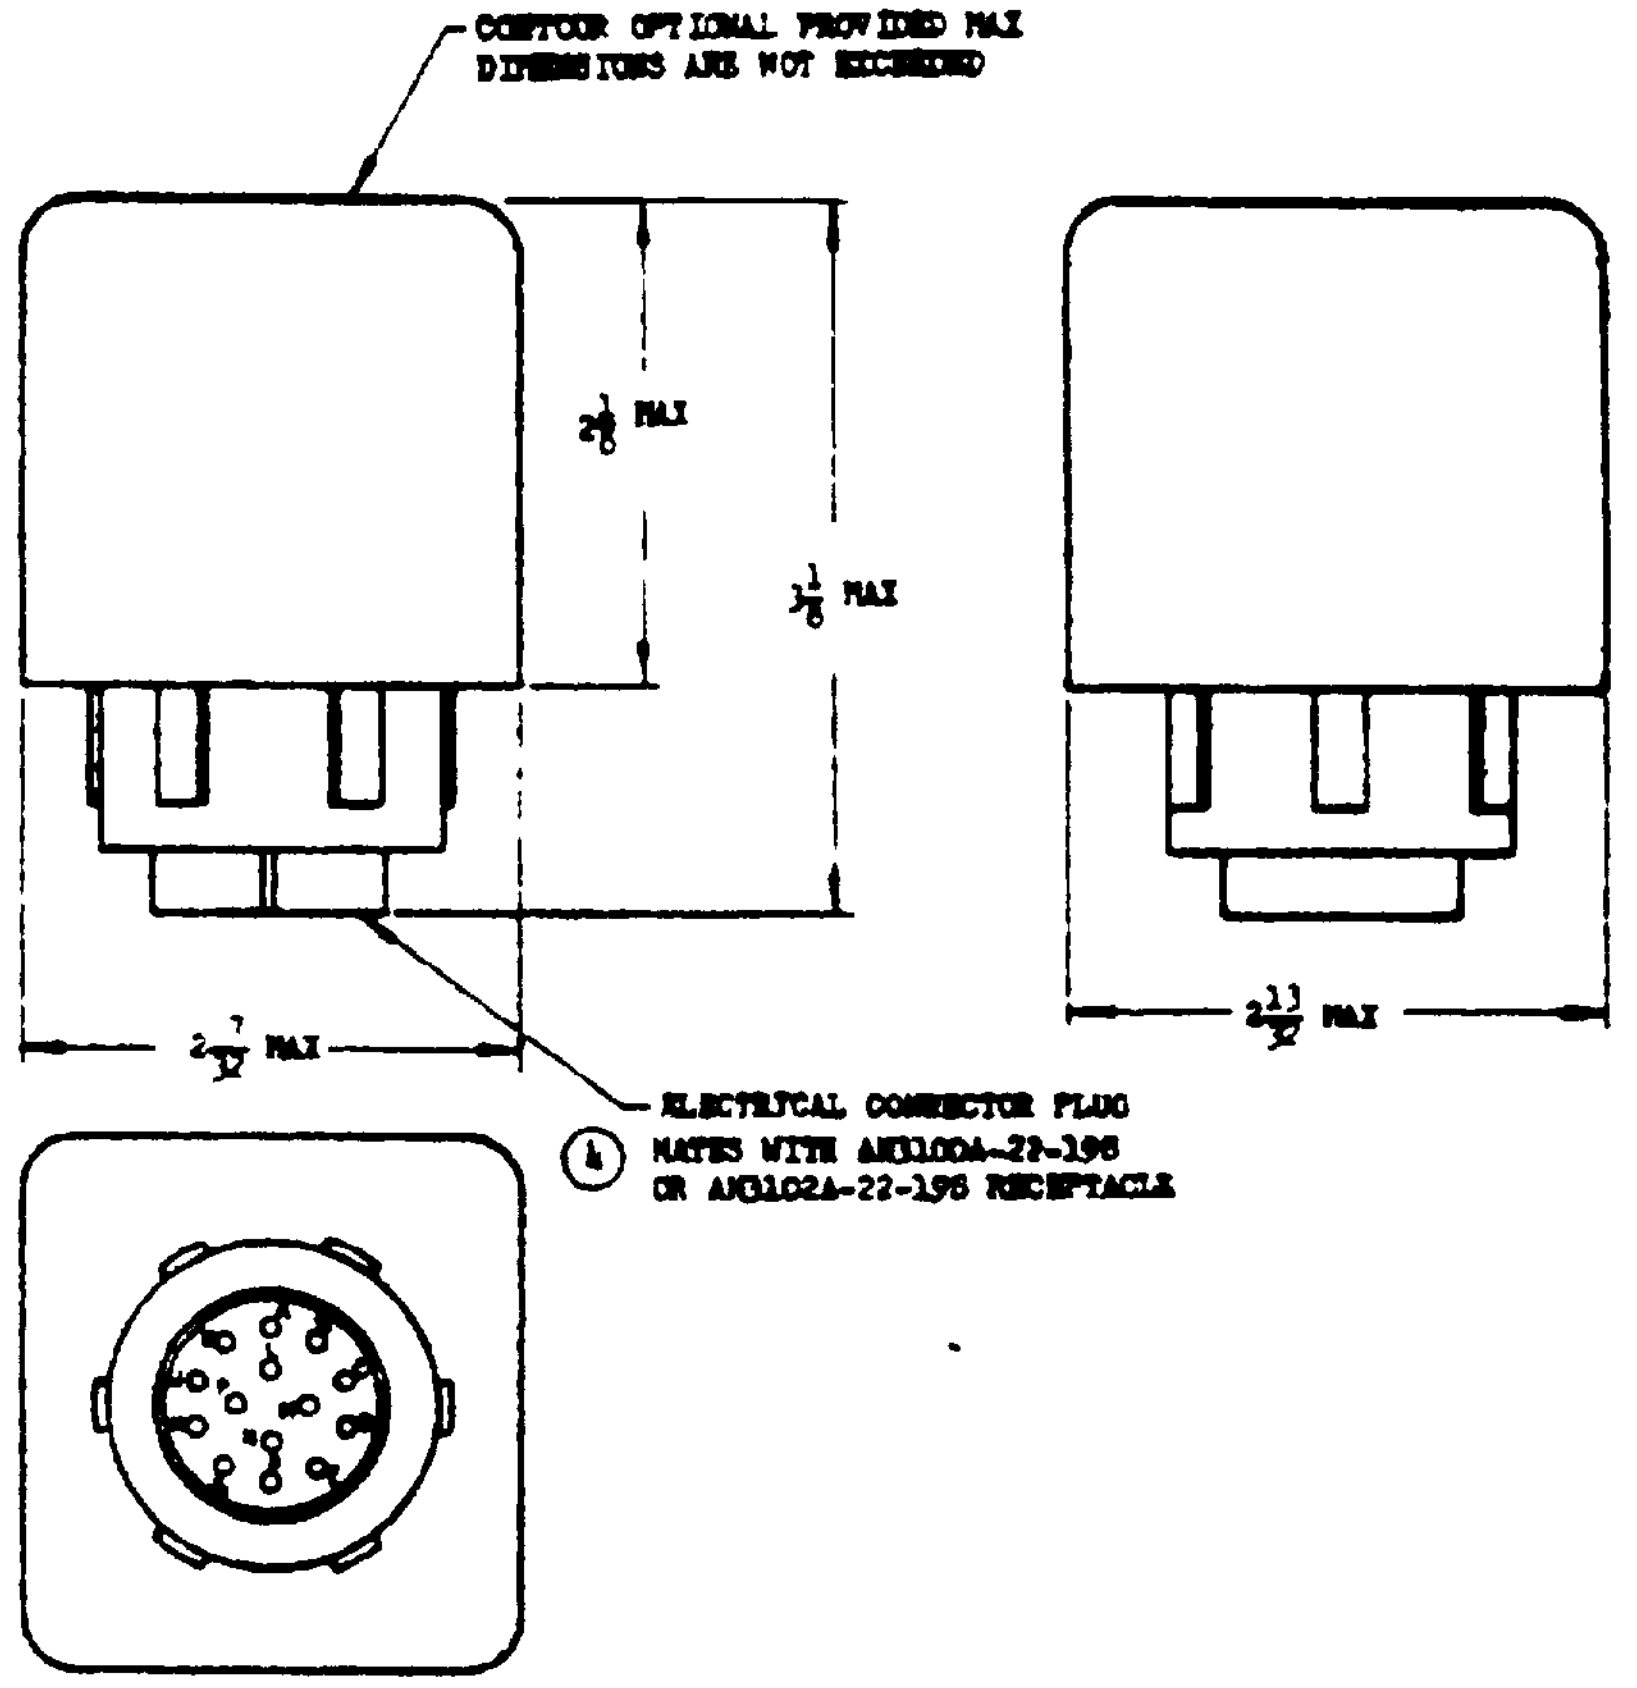
CONTOUR OPTIONAL PROVIDED MAX DIMENSIONS ARE NOT EXCEEDED
$2\frac{1}{8}$ MAX
$3\frac{1}{8}$ MAX
$2\frac{7}{32}$ MAX
$2\frac{11}{32}$ MAX
ELECTRICAL CONNECTOR PLUG
④ MATES WITH AN3100A-22-19S
OR AN3102A-22-19S RECEPTACLE

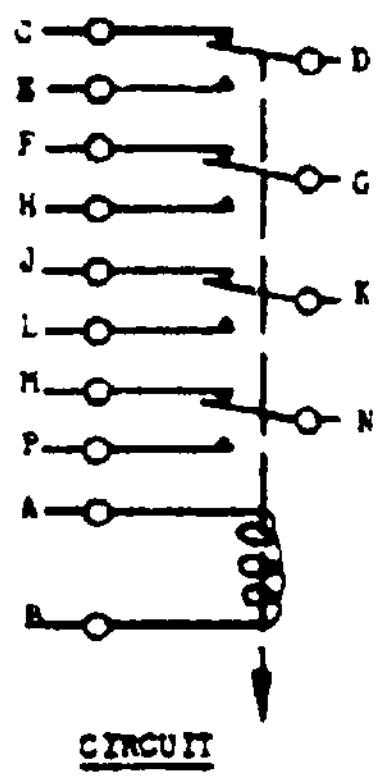
C
D
E
F
G
H
J
K
L
M
N
P
A
B

CIRCUIT

DETAIL REQUIREMENTS

(A) MAXIMUM OPERATING VOLTAGE 29 VOLTS
(B) PICKUP VOLTAGE 18 VOLTS
(C) DROPOUT VOLTAGE 7 VOLTS +0, -5.5
(D) RATED LOAD (PER POLE)

	NORMALLY OPEN	NORMALLY CLOSED
RESISTIVE (A-C 400-CYCLE, 115 VOLTS)	10 AMP	10 AMP
RESISTIVE (DC)	10 AMP	10 AMP
INDUCTIVE	10 AMP	10 AMP
MOTOR	6 AMP	6 AMP

(E) COIL CURRENT 0.35 AMP MAX
(F) MINIMUM OPERATING PERIOD 3 HOURS
(G) MINIMUM OPERATING CYCLES 50,000
(H) MAXIMUM WEIGHT 0.75 POUND
(I) RATED DUTY CONTINUOUS
(J) NOMINAL COIL VOLTAGE 28 VOLTS

AN PART NO.
AN3310-1
AN3310-2

INACTIVE FOR DESIGN AFTER 17 NOV 1954 NO SUPERSEDING STANDARD

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 387

PART NUMBER AN3310-2 RELAY SHALL BE EQUIPPED WITH GLASS TO METAL SEALED ELECTRICAL CONNECTOR.
④ PART NUMBER AN3310-2 RELAY SHALL MEET MINIMUM CURRENT REQUIREMENTS ESTABLISHED IN THE PROCUREMENT SPECIFICATION
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES FRACTIONS ±1/64, DECIMALS ±.005.

OVERLOAD, RUPTURE, AND CONTACT DROP TESTS OF SPECIFICATION MIL-R-6106 ARE NOT APPLICABLE TO PART NUMBER AN3310-1 RELAY

APPROVED 24 Apr 50 REVISED ① 20 May 52 ② 17 Nov 53 ③ 10 Apr 56 ④ 27 Jul 56

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3310
MIL-R-6106	RELAY, 10 AMP, 4PDT, SEALED, CONNECTOR MOUNTING, CLASS O	

SUPERSEDES USAF DRAWING 50B5188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.