


FOR: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

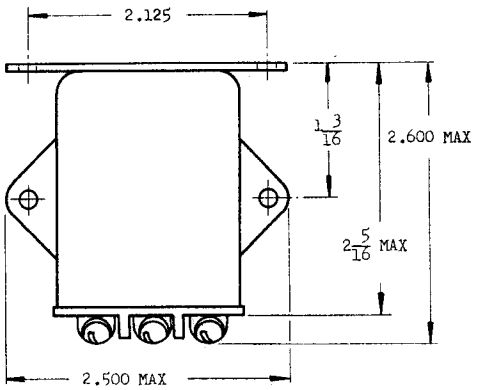

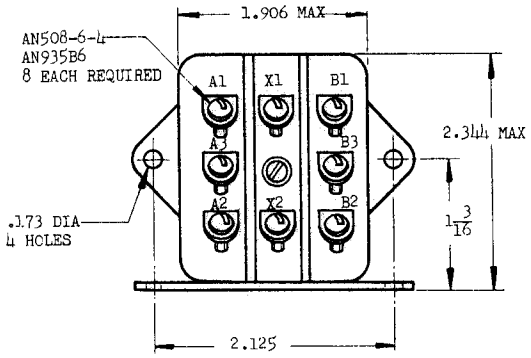



CIRCUIT

AN PART NO.
~~AN3311-1~~
AN3311-2

DETAIL REQUIREMENTS:

(A)	MAXIMUM OPERATING VOLTAGE	29 VOLTS
(B)	PICK-UP VOLTAGE	18 VOLTS
(C)	DROP-OUT VOLTAGE	7 VOLTS +0, -5.5
(D)	RATED LOAD: (PER POLE)	

LOAD	NORMALLY OPEN	NORMALLY CLOSED
RESISTIVE DC	10 AMP	10 AMP
RESISTIVE AC 400 CYCLES 115 VOLTS	10 AMP	10 AMP
INDUCTIVE	10 AMP	10 AMP
MOTOR	6 AMP	6 AMP

(E)	COIL CURRENT	0.20 AMP MAX
(F)	MINIMUM OPERATING PERIOD	3 HOURS
(G)	MINIMUM OPERATING CYCLES	50,000
(H)	MAXIMUM WEIGHT	0.44 POUND
(I)	RATED DUTY	CONTINUOUS
(J)	NOMINAL COIL VOLTAGE	-28 VOLTS

(3) INTERCHANGEABILITY RELATIONSHIP - MS24149 PARTS CAN UNIVERSALLY REPLACE THE INACTIVATED AN3311 PARTS IDENTIFIED BY THE SAME DASH NUMBERS; BUT THE INACTIVATED AN3311 PARTS CANNOT ALWAYS REPLACE THE SUPERSEDING MS24149 PARTS.

WIRING DIAGRAM TO BE PACKED WITH EACH RELAY.

THE AIRPLANE OR ENGINE MANUFACTURER SHALL ALLOW CLEARANCE FOR THE MAXIMUM DIMENSIONS SHOWN ON THIS DRAWING FOR INSTALLATIONS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.010.

OVERLOAD, RUPTURE, AND CONTACT DROP TESTS OF SPECIFICATION MIL-R-6106 ARE NOT APPLICABLE TO PART NUMBER AN3311-1 RELAY.

(3) PART NUMBER AN3311-1 INACTIVE FOR DESIGN AFTER 10 APRIL 1956.
PART NUMBERS AN3311-1 AND AN3311-2 ARE REPLACED BY PART NUMBER MS24149D1.
FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

PART NUMBER AN3311-2 RELAY SHALL MEET MINIMUM CURRENT REQUIREMENTS ESTABLISHED IN THE PROCUREMENT SPECIFICATION.

(3) INACTIVE FOR DESIGN AFTER 30 NOVEMBER 1959. USE MS24149.

APPROVED 10 Jul 50 REVISED (1) 10 Apr 56 (2) 27 Jul 56 (3) 30 Nov 59

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3311
MIL-R-6106	RELAY, 10 AMP, 2 PDT, HERMETICALLY SEALED	

U. S. GOVERNMENT PRINTING OFFICE 850057

SUPERSEDES USAF DRAWING 50B7502

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.