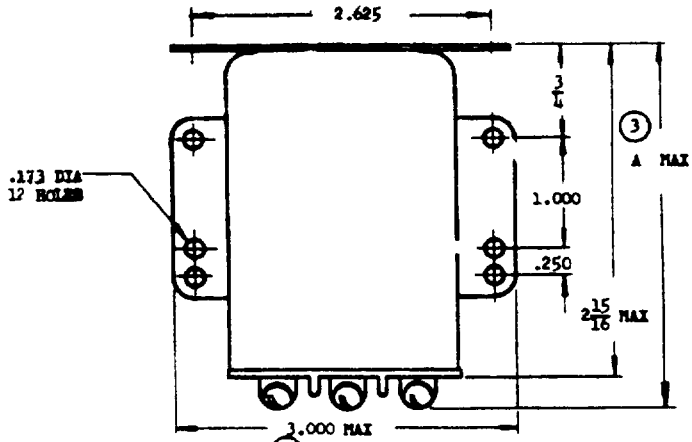

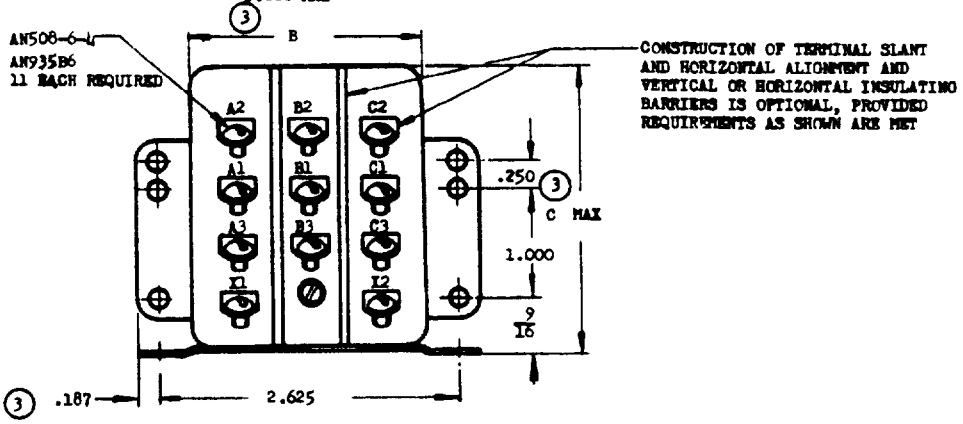

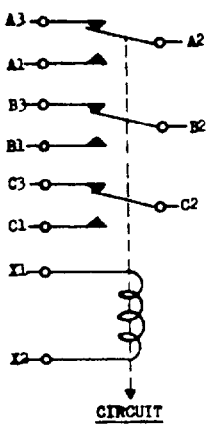

DETAIL REQUIREMENTS:

(A)	MAXIMUM OPERATING VOLTAGE	29 VOLTS
(B)	PICK-UP VOLTAGE	18 VOLTS
(C)	DROP-OUT VOLTAGE	7 VOLTS +0, -5.5

(D) RATED LOAD: (PER POLE)

LOAD	NORMALLY OPEN	NORMALLY CLOSED
RESISTIVE DC	10 AMP	10 AMP
RESISTIVE AC 400 CYCLES 115 VOLTS	10 AMP	10 AMP
INDUCTIVE	10 AMP	10 AMP
MOTOR	6 AMP	6 AMP

(E)	COIL CURRENT	0.35 AMP MAX
(F)	MINIMUM OPERATING PERIOD	3 HOURS
(G)	MINIMUM OPERATING CYCLES	50,000
(H)	MAXIMUM WEIGHT	0.8 POUND
(I)	RATED DUTY	CONTINUOUS
(J)	NOMINAL COIL VOLTAGE	28 VOLTS

(3)

AN PART NO	A (MAX)	B (MAX)	C (MAX)
AN3312-1	3-5/32	2-7/64	2-5/8
AN3312-2	3-5/16	2-13/64	2-11/16

INACTIVE FOR DESIGN AFTER 14 MARCH 1955. USE MS25024.

(3) PART NUMBER AN3312-2 RELAY SHALL MEET MINIMUM CURRENT REQUIREMENTS ESTABLISHED IN THE PROCUREMENT SPECIFICATION

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES FRACTIONS ±1/64, DECIMALS ± 010

OVERLOAD, RUPTURE, AND CONTACT DROP TESTS OF SPECIFICATION MIL-R-6106 ARE NOT APPLICABLE TO PART NUMBER AN3312-1 RELAY

APPROVED 10 Jul 50 REVISED (1) 14 Mar 55 (2) 10 Apr 56 (3) 27 Jul56

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3312
MIL-R-6106	RELAY, 10 AMP, 3PDT, SEALED, CLASS O	

SUPERSEDES USAF DRAWING 50B7503

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.