INCH-POUND

AN3314
REVISION 3
15 January 2002
SUPERSEDING
REVISION 2
17 May 1956

DETAIL SPECIFICATION SHEET

RELAY, 10 AMP, 1PDT, UNSEALED, CLASS O

Inactive for new design after 17 November 1954.
No superseding document.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-PRF-6106.

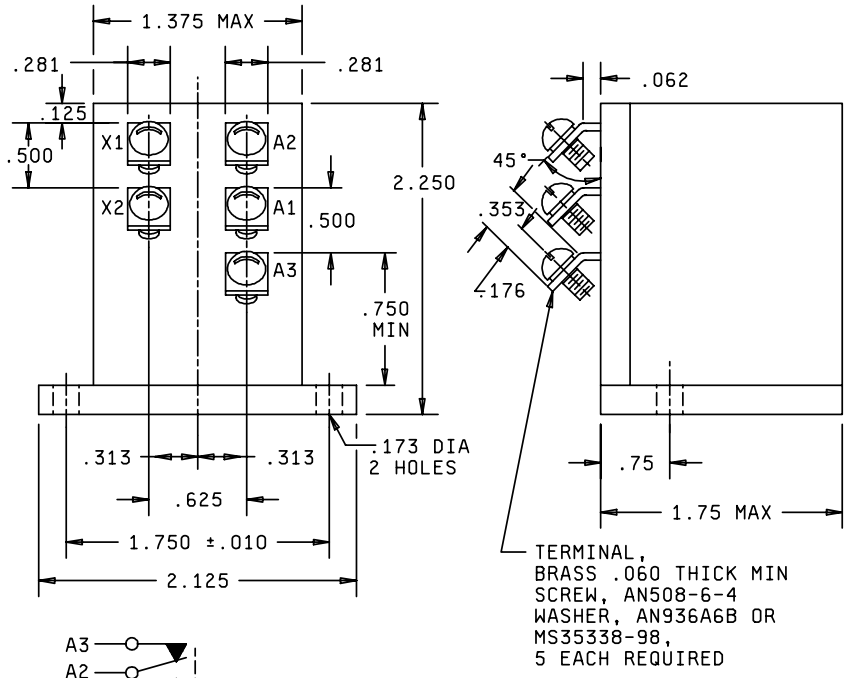



CIRCUIT

Inches	mm	Inches	mm
.010	0.025	.353	0.897
.016	0.040	.500	1.270
.063	0.160	.625	1.588
.125	0.318	.750	1.905
.173	0.439	1.375	3.493
.281	0.714	1.750	4.445
.313	0.794	2.125	5.400

FIGURE 1. Configurations and dimensions.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance are ±.016 (0.040 mm), angles ±5°.

FIGURE 1. Configurations and dimensions - Continued.

REQUIREMENTS

Operating cycles: 50,000 minimum.

Contact data:

Contact voltage drop: Not applicable.

Load ratings: See Table I.

TABLE I - Rated contact load (per pole).

Type of load	Amperes
Resistive (DC)	10
Inductive	10
Motor	6

Overload current: Not applicable.

Rupture current: Not applicable.

Coil data:

Nominal coil voltage: 28 volts.

Maximum operating voltage: 29 volts.

Pickup voltage: 18 volts.

Hold voltage: 7 volts

Dropout voltage: 1.5 volts.

Rated duty: Continuous.

Coil current: 0.2 amperes, maximum.

Physical data:

Weight: 0.4 pounds, maximum.

Qualification by similarity: See MIL-PRF-6106.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.

Retention of qualification: To retain qualification, the manufacturer shall submit group A acceptance reports on a yearly basis to the qualifying activity.

Quality conformance inspection: Performance of groups B and C tests are not applicable.

Part or Identifying Number (PIN): AN3314-1.

AN3310-2 relays shall meet the mixed loads current requirements specified in MIL-PRF-6106. The relay shall be equipped with a glass to metal sealed electrical connector.

Supersession information: Supersedes USAF Drawing 50B6188.

Custodian:
Army - AV
Air Force - 11
DLA - CC

Review activity:
Air Force - 99

Preparing activity:
DLA - CC

(Project 5945-1126-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.