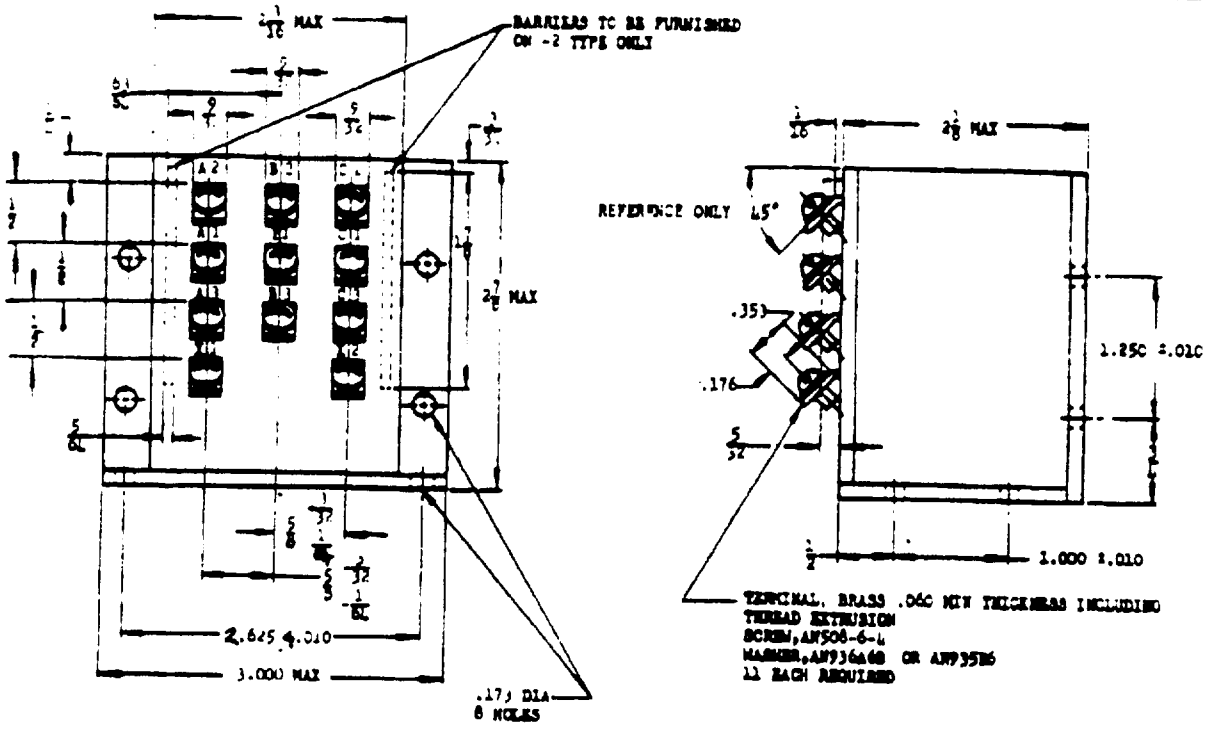

CIRCUIT



DETAIL REQUIREMENTS

(A)	MAXIMUM OPERATING VOLTAGE	29 VOLTS
(B)	PICKUP VOLTAGE	18 VOLTS
(C)	DROPOUT VOLTAGE	7 VOLTS +0, -5.5
(D)	RATED LOAD: (PER POLE)	

	NORMALLY OPEN	NORMALLY CLOSED
RESISTIVE	10 AMP	10 AMP
INDUCTIVE	10 AMP	10 AMP
MOTOR	6 AMP	6 AMP

(E)	COIL CURRENT	0.5 AMP
(F)	MINIMUM OPERATING PERIOD	3 HOURS
(G)	MINIMUM OPERATING CYCLES	50,000
(H)	MAXIMUM WEIGHT	0.625 POUND
(I)	RATED DUTY	CONTINUOUS
(J)	NOMINAL COIL VOLTAGE	28 VOLTS

	AN PART NO.	TYPE
(a)	~~AN3316-1~~	~~WITHOUT BARRIER~~
	AN3316-2	WITH BARRIER

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005, ANGLES ±5°.

OVERLOAD, RUPTURE, AND CONTACT DROP OF SPECIFICATION MIL-R-6106 ARE NOT APPLICABLE.

INACTIVE FOR DESIGN AFTER 17 NOVEMBER 1954, NO SUPERSEDING STANDARD

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE AMA BULLETIN NO. 287.

(6) (a) PART NUMBER AN3316-1 CANCELED 13 SEPTEMBER 1957. USE PART NUMBER AN3316-2.

APPROVED 17 Apr 56 REVISED (1) 18 Dec 56 (2) 16 Feb 56 (3) 10 June 56 (4) 17 Dec 56 (5) 17 May 56 (6) 13 Sep 57

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN3316
MIL-R-6106	RELAY, 10 AMP 3PDT, UNSEALED, CLASS 0	

GPO 812220

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:20Z
Check the source to verify that this is the current version before use.