MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT ANGLE, HERMAPHRODITIC CONTACT, WRAPPOST, REMOVABLE, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by the Communications Research and Development Command, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-55302.

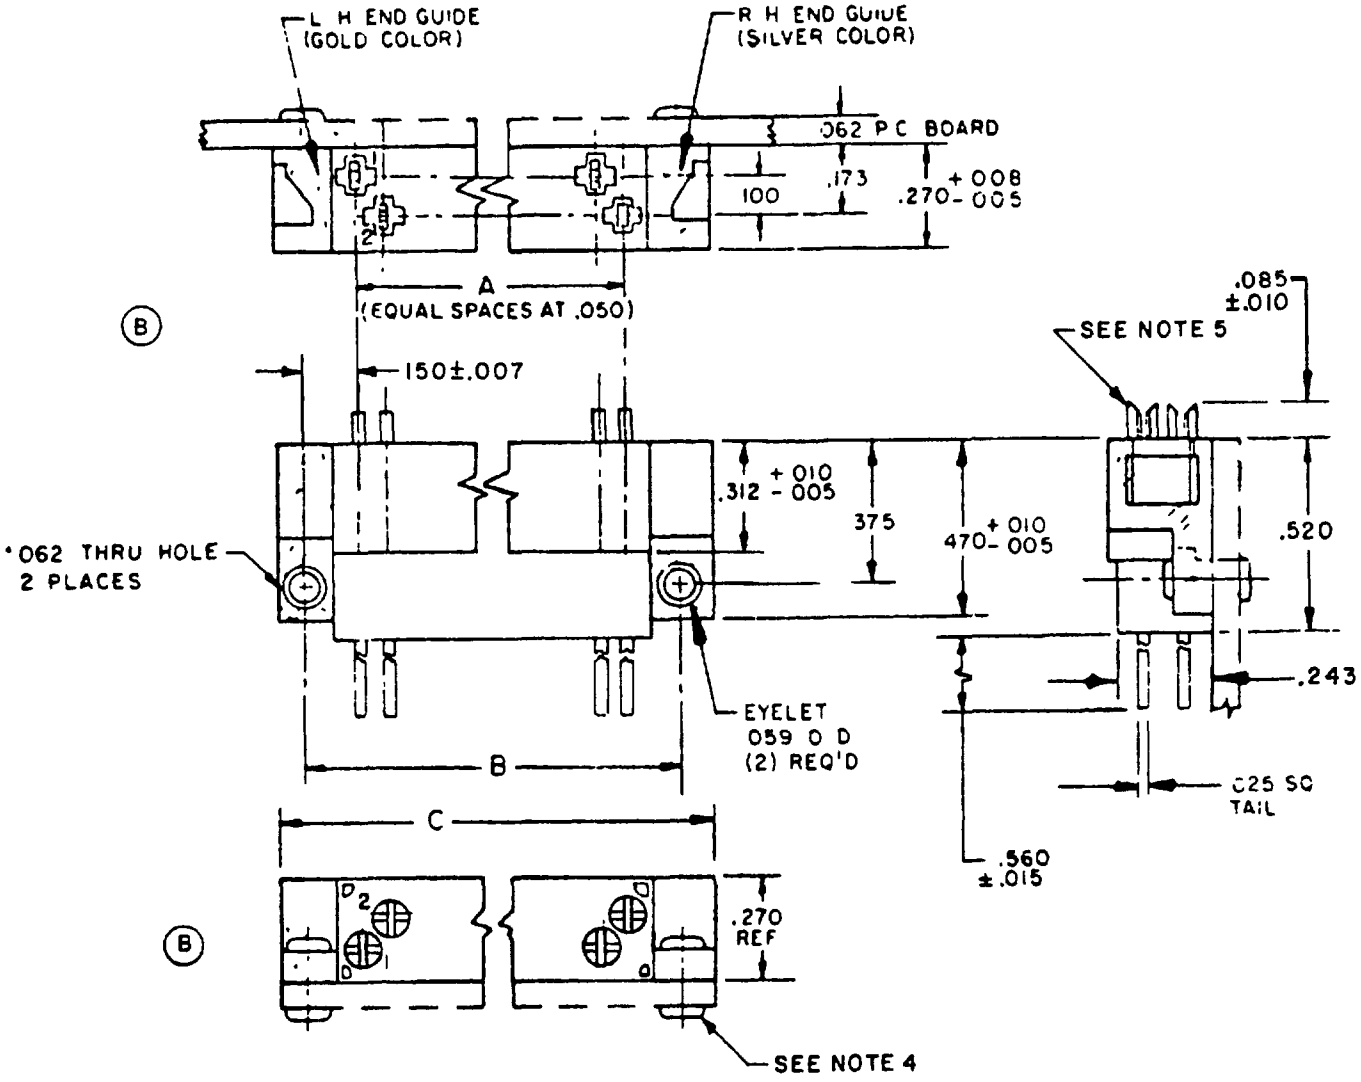


FIGURE 1. Connector, plug (.100 spacing).

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil - Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.


Ⓑ

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.025	.64	.100	2.54	.312	7.92
.007	.18	.050	1.27	.150	3.81	.375	9.52
.008	.20	.059	1.50	.173	4.39	.470	11.94
.010	.25	.062	1.57	.243	6.17	.520	13.21
.015	.38	.085	2.16	.270	6.86	.560	14.22

Ⓑ

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Connectors are supplied with open eyelets (2), which are to be rolled over after assembly to printed wiring board.
5. With connectors fully engaged the mating contacts shall have a minimum overlap distance of .062. As a minimum the contacts shall exhibit a wiping action through the distance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

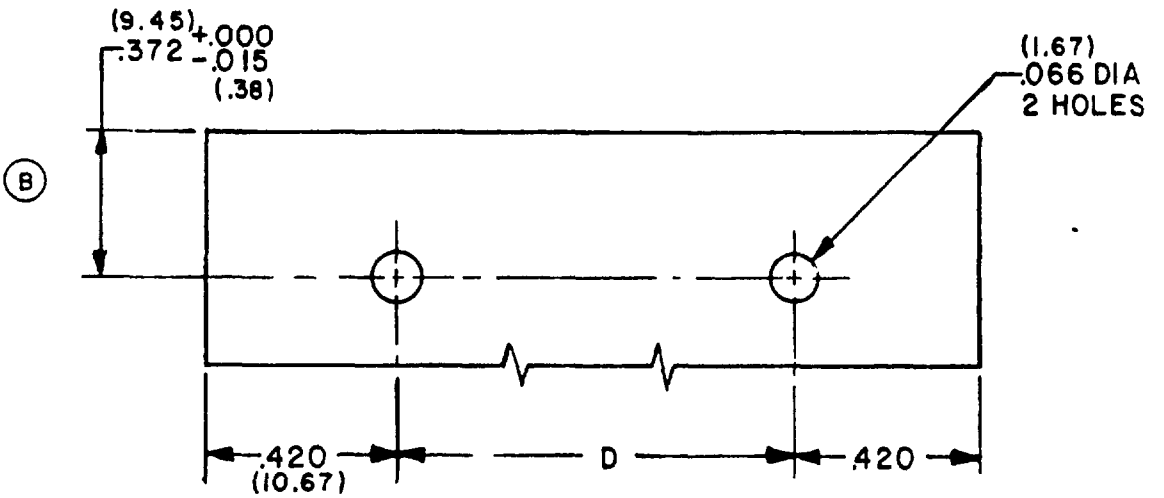

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.

FIGURE 2. Typical cutout for plug for nonconductive chassis.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:49Z
Check the source to verify that this is the currenversion before use.

TABLE I. Dash number and dimensions. (B)

Dash number 1/	No. of contacts	*Dimensions (inches) A	B ±.010	C Ref.	D
01	18	.850 (21.59)	1.150 (29.21)	1.290 (32.77)	1.150 (29.21)
02	30	1.450 (36.83)	1.750 (44.45)	1.890 (48.01)	1.750 (44.45)
03	36	1.750 (44.45)	2.050 (52.07)	2.190 (55.63)	2.050 (52.07)
04	42	2.050 (52.07)	2.350 (59.69)	2.490 (60.96)	2.350 (59.69)
05	54	2.650 (67.31)	2.950 (74.93)	3.090 (78.49)	2.950 (74.93)
06	72	3.550 (90.17)	3.850 (97.79)	3.990 (101.35)	3.850 (97.79)

1/ See requirements for complete part number when keying pin is required.
* Metrics are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration. See figures 1 through 5 and table I.

Material and finish:

Insulator: MIL-M-14, type SDG-F.

End guides: Left hand, sintered brass 90/10, clear chromate per MIL-C-5541, class 1A. Right hand, sintered brass 90/10, nickel plate 300 microinches per MIL-F-14072.

Keying pin: Aluminum alloy 2011-T3 with clear chromate per MIL-C-5541, class 1A.

Contact identification: Contact locations are identified in numerical sequence (see figure 1).

Mating and unmating: The maximum insertion force, in pounds, shall not exceed a value equal to .5 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of .11 times the number of contacts and shall not exceed the measured insertion force.

(B) Contact retention: 6.0 pounds minimum after five insertions and withdrawals from the same connector position.

Wrappost: Contacts shall meet the requirements of MIL-STD-1130.

Contact resistance: The contact resistance shall not exceed 20 milliohms.

Dry circuit: Connectors shall be tested in accordance with method 3002 of MIL-STD-1344. The contact resistance shall not exceed 20 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 volts rms, 60 hertz.

High altitude: 300 volts rms, 60 hertz.

(B) Current rating, maximum: 5 amperes.

Keying: When required, one of the following codes shall be added to the dash number:

"P" - Specifying location by contact number where keying pin shall be inserted, for example, M55302/100-01P17. (Keying pin inserted in place of contact number 17.)

"H" - Specifying location by contact number where contact shall be omitted for mating; for example, M55302/100-01H17. (Keying pin hole has contact number 17 omitted.)

Contacts: Shall conform to MIL-C-55302/98.

(B) Contact removal tool: Shall conform to MIL-I-81969/4.

(B) Contact insertion tool: Shall conform to MIL-I-81969/5.

Mating receptacle: Shall conform to MIL-C-55302/52, MIL-C-55302/99, or MIL-C-55302/102.

Part number: M55302/100-(dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

Custodian:
Army - CR

Review activities:
Army - AT, AV, MI
DLA - ES

User activities:
Army - AR, ME

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-A141-2)

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:49Z
Check the source to verify that this is the current version before use.

OLD

EPARTMENT OF THE ARMY

OFFICIAL BUSINESS
NALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-55302/100B(CR)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Ft. Monmouth, N.J., 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:49Z
Check the source to verify that this is the current version before use.