MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY - THOUSANDS DECADE
MEMORY AND READOUT - A2: 10547220

This amendment forms a part of Military Specification MIL-C-60577(MU) dated 18 June 1970.

Paragraph 3.7.2.2, sixth line, delete: "Levels of 1.25 ± 0.1V and 0.2 ± 0.2V for" and substitute "Levels of 1.2 ± .4V and .25 ± .25V for".

Paragraph 3.7.2.3, second, third, and fourth line, delete: "Pin A shall be set to a logical zero (0.1 ± 0.1 VDC) and the output at Pin L shall be set to a logical one (1.1 ± 0.1 VDC) and the output at Pin n" and substitute "Pin A shall be set to a logical zero (.25 ± .25 VDC) and the output at Pin L shall be set to a logical one (1.4 ± .4 VDC) and the output at Pin n"; sixth and seventh line: delete "Pin I shall be set to 1.4 ± 0.2 VDC and Pin L shall be set to a logical zero (0.1 ± 0.1) VDC" and substitute "Pin I shall be set to 1.4 ± .4 VDC and Pin L shall be set to a logical zero (.25 ± .25 VDC)."

Paragraph 3.7.2.5, second and third line: delete "Pin 0 shall be a logical zero (0.1 ± 0.1 VDC)" and substitute "Pin 0 shall be a logical zero (less than .3 VDC)"; fourth and fifth line: delete "Pin 0 shall be a logical one (1.1 ± 0.1 VDC)" and substitute "Pin 0 shall be a logical one (1.1 ± .2 VDC)."

Paragraph 3.7.2.6, second and third lines: Delete "Pins I and L shall be 1.1 ± 0.1 VDC and 0.1 ± 0.1 VDC respectively" and substitute "Pins I and L shall be 1.4 ± .4 VDC and .25 ± .25 VDC respectively"; fourth line: Delete "Pin I shall change to 0.1 ± 0.1 VDC" and substitute "Pin I shall change to less than .3 VDC".

Paragraph 3.7.2.7, first and second line: Delete "a positive 1.2 ± 0.1V, 20 microsec pulse shall appear at Pin E" and substitute "A positive 1.15 ± .25V pulse, with width greater than 7.4 microseconds shall appear at Pin E"; Delete "+2.3V ± 0.2V at Pin b.
+1.7V ± 0.2V at Pin d.
+1.2V ± 0.2V at Pin f."

and substitute "+2.3 ± .5V at Pin b.
1.73 ± .41V at Pin d.
1.5 ± .4V at Pin f."

Paragraph 4.3.4: Delete paragraph and substitute:

"4.3.4 Certification.- Certification shall include test data and results for the characteristics specified below. Certification shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

be provided prior to performing final acceptance inspection, and remain in effect throughout the performance of the contract. This does not relieve the contractor from inspection throughout the contract production, including recording data and results therefrom. Recorded data and results shall be made available to the Government upon request. A new certification shall be required whenever any change(s) occur in materials, manufacturing processes and techniques previously certified. Exception to the above may be provided by certificate of compliance (COC) for those items for which the contractor cannot obtain recorded data, i.e., off the shelf items. This exception shall not apply without prior approval by Frankford Arsenal. Request for approval shall include item name, part number, identification of supplier, and justification for exception; and shall be forwarded to Commanding Officer, Frankford Arsenal, ATTN: SMUFA-Q4000."

Paragraph 4.6.5.1, third sub-paragraph, first and second line: Delete "Pin A shall take on a DC level of +0.1 ± 0.1V," and substitute "Pin A shall take on a DC level of .25 ± .25 VDC"; sixth and seventh line: Delete "and Pin A shall assume a DC potential of 1.25V ± 0.1V" and substitute "and Pin A shall assume a DC potential of 1.4 ± .4 VDC"; fourth sub-paragraph, delete:

"Pin L shall be + 1.4 ± 0.2 VDC
Pin I shall be +0.2 ± 0.1 VDC
Pin A shall be + 0.2 ± 0.1 VDC
Pin n shall be +0.2 ± 0.1 VDC"

and substitute:

"Pin L shall be 1.4 ± .4 VDC
Pin I shall be less than .3 VDC
Pin A shall be .25 ± .25 VDC
Pin n shall be less than .5 VDC";

sixth sub-paragraph: Delete: "Pin L shall be +0.2 ± 0.1 VDC
Pin I shall be +1.4 ± 0.2 VDC"

and substitute: "Pin L shall be .25 ± .25 VDC
Pin I shall be 1.4 ± .4 VDC";

Seventh sub-paragraph: Delete: "Pin L shall be +0.2 ± 0.1 VDC
Pin I shall be +0.2 ± 0.1 VDC"

and substitute: "Pin L shall be .25 ± .25 VDC
Pin I shall be less than .3 VDC";

eighth sub-paragraph: Delete: "Pin I shall be +1.4 ± 0.2 VDC
Pin L shall be +0.2 ± 0.1 VDC"

and substitute: "Pin I shall be 1.4 ± .4 VDC
Pin L shall be .25 ± .25 VDC"

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

Ninth sub-paragraph, second and third line: Delete "A potential of +0.2V ± 0.1 VDC shall be established at Pin O" and substitute "A potential of less than .3 VDC shall be established at Pin O"; tenth sub-paragraph, second and third line: Delete "A DC potential of +0.2 ± 0.IV shall be established at Pin O" and substitute "A DC potential of less than .3 VDC shall be established at Pin O"; eleventh sub-paragraph, second line: Delete "A DC potential of +0.2 ± 0.IV shall be established at Pin O" and substitute "A DC potential of less than .3 VDC shall be established at Pin O"; twelfth sub-paragraph, second line: Delete "+1.2 ± 0.2V" and substitute "1.1 ± .2V"; thirteenth sub-paragraph, second and third line: Delete "a positive pulse 1.2V ± 0.IV shall appear at Pin E for a duration of 20 microsec" and substitute "a positive pulse 1.15 ± .25V shall appear at Pin E for a duration of at least 7.4 microsec"; fourteenth sub-paragraph, third, fourth, and fifth line: Delete:


"Pin b shall be +2.3V ± 0.2 VDC
Pin d shall be +1.7V ± 0.2 VDC
Pin f shall be +1.2V ± 0.2 VDC"

and substitute:

"Pin b shall be +2.3 ± .5 VDC
Pin d shall be +1.73 ± .41 VDC
Pin f shall be +1.5 ± .4 VDC"

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.

FIGURE 2: Delete in its entirety and substitute:

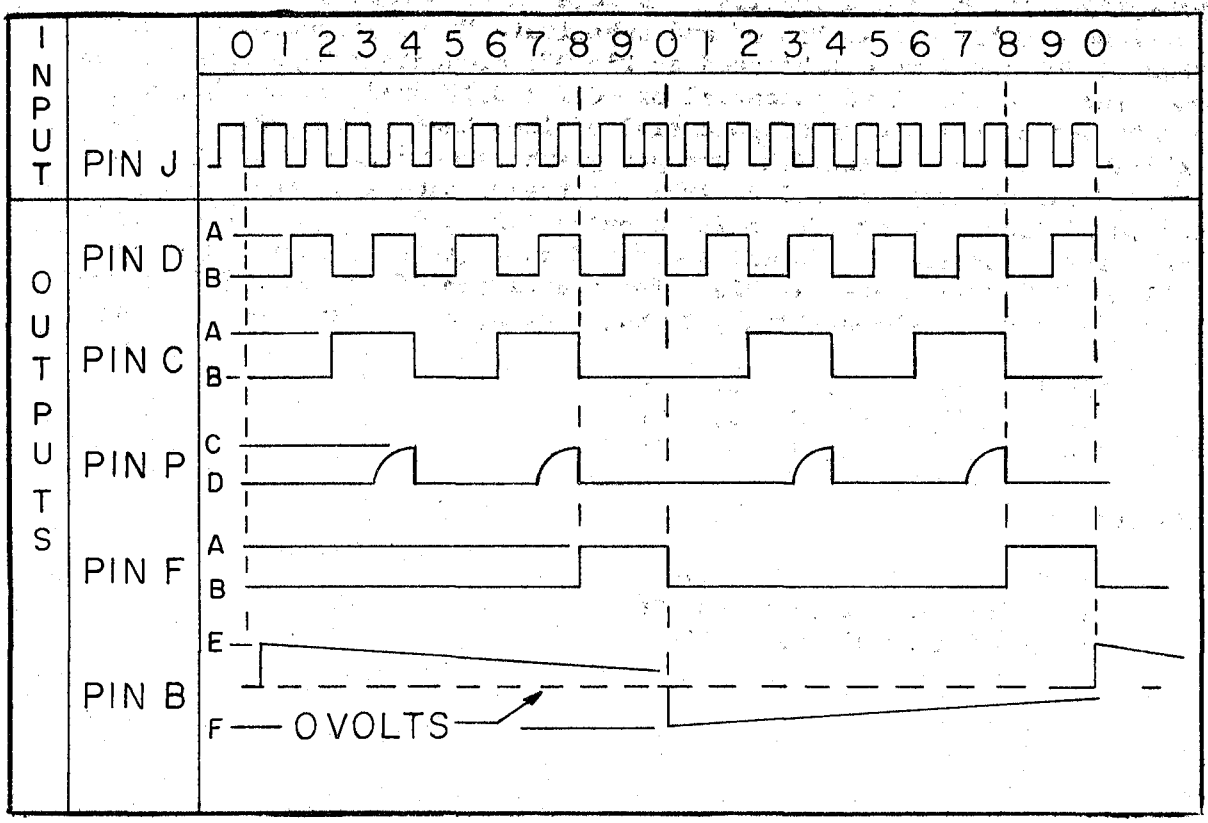

AMPLITUDES

	+70°F	+155°F	-65°F
A	1.0V MIN	.85V MIN	1.2V MIN
B	.21V MAX	.28V MAX	.20V MAX
C	.8V MIN	.8V MIN	.8V MIN
D	.3V MAX	.3V MAX	.3V MAX
E	1.2V MIN	1.2V MIN	1.2V MIN
F	-1.2V MIN	-1.2V MIN	-1.2V MIN

FIGURE 2

Custodian:

Army MU

Preparing Activity

Army - MU

Project No. 1240-A392

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:45Z
Check the source to verify that this is the current version before use.