MILITARY SPECIFICATION

MAGNETIC DISK, DATA STORAGE: 10526600

This amendment forms a part of specification MIL-M-60183(MU), dated 18 March 1965.

Paragraph 3.2.2: Delete and substitute:

"3.2.2 Residue.- After 150 starts and stops in the horizontal orientation during assembly, the static break-away torque of the disk from the headplate surface shall be equal to or less than the same torque prior to initiation of the start-stop cycling, and the maximum start-up voltage of the assembled memory shall be less than 70 volts, 3 phase, 400 cps. Limits apply at room temperature and in the horizontal orientation."

Paragraph 3.2.3: Delete and substitute:

"3.2.3 Sealing.- The equipment shall be pressurized to 27 ± 2 inches of mercury, gage, using dry nitrogen gas and held at this pressure, while immersed in Freon TF, for sufficient time to determine that the memory is adequately sealed. There shall not be a visible and continuous stream of bubbles emanating from any part of the memory when viewed at 1X magnification."

Paragraph 3.2.4: Delete and substitute:

"3.2.4 Gassing.- The memory shall be flushed three times by filling with dry nitrogen gas after evacuating to a pressure of 10,000 microns. Upon completion of the cycling, the unit shall be filled with dry nitrogen gas, previously specified, and sealed."

Paragraph 3.2.7: Add new paragraph as follows:

"3.2.7 Residual magnetism.- There shall be less than a 5 percent decrease in signal amplitude between a read while write signal and a signal after writing has been stopped on either a one (1) or zero (0) bit due to any residual magnetism of the write heads."

Paragraph 3.4.6.1: Delete and substitute:

"3.4.6.1 Operating.- The memory shall meet the requirements of 3.2.5, 3.2.6 and 3.5 after exposure to an altitude of 10,000 feet above sea level at a temperature of 75 ± 15°F."

Paragraph 3.5.3.1: Delete and substitute:

"3.5.3.1 Signal amplitude.- All pulses from the sector read head shall not be less than 115 millivolts for Method I. (See 6.3.7 methods), or less than 140 millivolts for Method II peak-to-peak, and not greater than 220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

millivolts for Method I, or greater than 200 millivolts for Method II, zero-to-peak, when operating under conditions of Table I."

Paragraph 3.5.3.4: Delete and substitute:

"3.5.3.4 Information phase shift.- The sector information, at the 45 millivolts crossings of a negative-to-positive potential change, shall be .5 ± .08 clock cycles phase shift with respect to the zero current crossing at the sector write head when writing."

Paragraph 3.5.3.5: Delete and substitute:

"3.5.3.5 Information pulse width.- The sector information pulse width shall be 1 + .18-.12 clock cycles at 25 millivolts above zero potential when operating under conditions of Table I."

Paragraph 3.5.4.2: Delete and substitute:

"3.5.4.2 Pulse width.- The pulse width shall be 1 +.18 -.12 clock cycles at a channel signal level which is 25 ± 2 millivolts above the base line."

Paragraph 3.5.4.3: Delete and substitute:

"3.5.4.3 Write head to read spacing.- The period between initiating the writing of the flux transition (that point at which the algebraic difference of the write current through the start terminal to center tap and final terminal to center tap is zero) and the 45 millivolts level on the leading edge of the first pulse when reading a one (1) in a field of zeros (0) at the channel read head, shall be equivalent to the period required for the number of clock cycles (designed in Table III) to be read at the clock read head."

Paragraph 3.5.6: Delete and substitute:

"3.5.6 Pulse delay.- The pulse delay at the positive 45 ± 2 millivolts crossings of a zero potential to a positive potential change between two patterns, for all channels except the clock channel, shall not exceed .22 clock cycles when subjected to the following:

(a) No change
(b) No change
(c) No change

The write current is to be determined with the---(No change)."

Paragraph 3.5.7: Delete in its entirety.

Paragraph 3.5.8: Delete "105 watts" and substitute "120 watts".

Paragraph 3.6: Delete and substitute:

"3.6 Memory run-in.- All completed memories shall be subjected to

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

the requirements of 4.2.4.2. In addition, one memory per month of production shall comply with Paragraph 4.2.4.3. Memories which have complied, shall be selected, as required, for Spares/System usage at the option of the contractor and shall comply with Paragraphs 3.6.1, 3.6.2, and 3.6.3, as applicable."

Paragraph 3.6.1: Add new paragraph:

"3.6.1 Memory run-in, spares.- Memories selected for spares shall be installed in a computer and subjected to the test program of Paragraph 3.7.1, after which, if successful, it shall continue testing in accordance with Paragraph 3.7.2. Following completion of paragraph 3.7 testing, the memory shall be tested in accordance with the requirements of paragraph 4.2.4.1."

Paragraph 3.6.2: Add new paragraph:

"3.6.2 Memory run-in, system.- Memories selected for system usage shall be subjected to the requirements of paragraph 4.2.4.1 after which it shall be installed in the computer with which it is intended to be shipped to be subjected to paragraph 4.2.4, Functional Tests, of MIL-C-60184."

Paragraph 3.6.3: Add new paragraph:

"3.6.3 Memory run-in-start/stop procedure.- All memories shall be subjected to 400 complete start/stop cycles. Ten each shall be conducted in the horizontal and vertic al orientations in the low temperature and high temperature environments. The ability of the memory to comply with the requirements of paragraph 3.2.5 shall not be impaired. The placement of the start/stop test program within the overall schedule of paragraph 3.6 requirements shall be a contractor option."

Paragraph 3.7: Add new paragraph and subparagraphs as follows:

"3.7 Computer functional tests.

3.7.1 Functional tests - spares.

3.7.1.1 High temperature test.- The computer connected to a system tester, or other memory loading device, will be placed in a temperature chamber. The computer may or may not be in a field case. In the event that it is in a field case, the rear cover shall not be in place. If the computer is not in a field case, the top and bottom covers must be in place (to insure proper air flow). The chamber temperature will be raised to +125°F at a rate not to exceed 2°F per minute. While the temperature is being changed, the computer shall be operating. When the chamber temperature has stabilized at +125°F memory evaluation (MEV-4) will be loaded through the photoreader. The computer will then be placed in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

run mode and the program will be run six times (margined off and five (5) marginal positions). The memory will then be cleared and "Command Test" loaded via the photoreader. The computer will then be placed in the run mode and the program run six times, onece in each position of the marginal test switch. Upon conclusion of Command Test, the memory will be cleared and Phase III loaded and verified via the photoreader. Continuous performance and hot storage dump will not be used. The batteries will be "Set Up" one battery in each of the five (5) marginal test positions. "Met Data H" will be entered via the mechanical reader in marginal off. Problems will be entered via the manual keyboard, one battery in each of the five (5) marginal test positions. Program test one and two will then be run in all marginal positions. All batteries will be solved, both high and low angle, in all marginal positions (total of 60 solutions). Targets will then be stored and recalled in each position of the marginal test switch.

3.7.1.2 Low temperature test.- The computer will then be turned off and temperature reduced to -22°F at a rate not to exceed 2°F per minute. The computer will remain non-operating for at least four (4) hours after chamber stabilization at -22°F. The computer will then be turned on and after the power ready light comes on, Program Test I and 2 will be run in all marginals (from information stored at the other temperature extreme). Note: If a parity error occurs during "Program Test 2" this is not to be considered a failure provided the parity error can be cleared using "Hot Storage Clear" on the failing channel(s). Memory evaluation will then be loaded via the photoreader. The computer will then be placed in the run mode and the program executed six times (marginal off and five (5) marginal positions). The memory will then be cleared and "Command Test" load via the photoreader. The computer will then be placed in the run mode and the program run six times, once in each position of the marginal test switch. Upon the conclusion of Command Test, the memory will be cleared and Phase III loaded and verified via the photoreader. Continuous performance and hot storage dump will not be used. The batteries will be "Set Up" one battery in each of the five (5) marginal test positions. "Met Data H" will be entered via the mechanical reader in marginal off. Problems will be entered via the manual keyboard, one battery in each of the five (5) marginal test positions. Program test one (Sum check) and program test two will then be run in all marginal positions. All batteries will be solved, both high and low angle, in all marginal positions (total of 60 solutions). Targets will then be stored and recalled in each position of the marginal test switch.

3.7.1.3 Test conditions.- The order in which the temperature tests are run is optional and may be varied at the convenience of this contractor. The stabilization time, being the only major difference in the two tests, will be strictly adhered to. The condition of computer power shutdown may arise during the high temperature test and is not to be considered a failure. The action to be taken when this condition arises will be to reduce the chamber temperature by three (3) degrees Fahrenheit and after chamber stabilization, re-energize the computer and proceed. This process is limited to insure that the lowest continuous operating temperature will not drop below 122°F. The Pattern Sensitivity Test, Paragraph 3.7.3, shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

be conducted at each of the temperatures of 3.7.1.1 and 3.7.1.2. The placement of the routine within the test requirements shall be a contractor option.

3.7.2 Run-in tests - spares.- Memory shall be removed from the computer and operated at +60° to +90°F ambient temperature for a total of 50 hours, including the operational time accumulated during the execution of preceding portions of Paragraph 3.6. At 4 hour intervals, the memory motor power shall be removed until the disk comes to a complete stop, after which the power shall be reapplied for a continuation of the Run-In procedure. The start/stop operation shall be conducted alternately in the horizontal and vertical orientation.

3.7.3 Memory pattern sensitivity test.- The memory shall be installed in the M-18 Gun Direction Computer, and the following test must be successfully run in all marginal positions under both extreme temperature conditions -25°F and +125°F. All memory locations shall be loaded with a series of selected patterns which will be provided by the Frankford Arsenal Fire Control Engineering Group. After each pattern has been loaded into the memory, the patterns will be read back from each memory location and verified against the patterns as written."

Paragraph 4.2.4: Delete and substitute:

"4.2.4 Functional tests.

4.2.4.1 Room temperature.- The requirements and tests of Table IV shall be inspected on a 100% basis at +60° to +90°F ambient temperature.

TABLE IV
(100 Percent Inspection)

Characteristics	Requirements	Test Procedures
101. Disk Rotation	3.2.1	4.5.2.1
(a) No changes items 101 through 125		
(b) 126 Memory "Run-In"	3.6	4.5.2.20

4.2.4.2 Low temperature.- The requirements and tests, as follows, from Table IV shall be inspected on a 100% basis at -25°F ambient temperature.

TABLE IV
(100% Percent Inspection)

Characteristics	Requirements	Test Procedures
116. Channel Signal Amplitude	3.5.4.1	4.5.2.11.(b)
117. Channel Pulse Width	3.5.4.2	4.5.2.12
120. Noise	3.5.4.5	4.5.2.14.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

4.2.4.3 High temperature.- The requirements and tests, as follows, form Table IV, shall be inspected at +135°F ambient temperature.

TABLE IV

Characteristics	Requirements	Test Procedures
116. Channel Signal Amplitude	3.5.4.1	4.5.2.11.(b)
117. Channel Pulse Width	3.5.4.2	4.5.2.12
120. Noise	3.5.4.5	4.5.2.14.2"

Paragraph 4.3: Delete and substitute:

"4.3 Standard sampling.

4.3.1 General.- One memory shall be selected at random by a Government representative from each 100 memories produced, as a standard sample. The sample shall meet the requirements and tests of Table V.

(No change in Table V.)

4.3.2 Environmental.- Two memories shall be selected at random by a Government representative, from those memories which have completed Paragraph 3.6.1, as a standard sample from each 70 memories produced or one from each two months production whichever occurs first. The control samples shall have met the requirements and tests of paragraph 4.2.4 and Table V and shall then meet the requirements and tests in Table VI.

TABLE VI

Characteristics	Requirements	Test Procedures
304. Vibration	3.4.1	4.5.1.1
305. Shock	3.4.2	4.5.1.2
308. Operating Temp.	3.4.3.1	4.5.1.4
309. Storage Temp.	3.4.3.2	4.5.1.4
310. Elevation - Operating	3.4.6.1	4.5.1.8.2
311. Elevation - Non-operating	3.4.6.2	4.5.1.8.1

4.3.3 Failure of sample.- Should the memory being subject to the testing outlined in Paragraph 4.3.2 fail the requirements of the specification, the contractor shall make an analysis of the failure. Upon satisfactory resolution of the cause of failure, corrective action as required, shall be implemented. After the necessary corrections have been made in the sample unit, the testing of this unit will be continued.

Paragraph 4.5.1.2: Delete and substitute:

"4.5.1.2 Shock.- This test shall be conducted in accordance with the conditions of 3.4.2 and Procedure II of the shock test defined in MIL-F-13926 except that impact shocks shall not exceed 5 G's. The memory

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

shall be subsequently inspected for physical damage or defects in compliance with 3.4.2. The unit shall then be inspected as specified in 4.5.2.3, 4.5.2.4, and 4.5.2.5 through 4.5.2.18 to determine compliance with 3.4.2."

Paragraph 4.5.1.4: Delete "all environmental tests" and substitute "test procedures".

Paragraph 4.5.1.6: Delete and substitute:

"4.5.1.6 Sealing.- The memory shall be subjected to the pressure indicated in 3.2.3 utilizing commercial type testing equipment consisting of pressure measuring gages, gas supply, and test chamber. The memory shall be pressurized and completely immersed in the chamber containing Freon TF. The pressure shall be maintained while inspecting for evidence of leakage, as indicated by a continuous and visible stream of bubbles. Random and non-repetitious bubbles shall not be indicative of leakage."

Paragraph 4.5.1.7: Delete and substitute:

"4.5.1.7 Gassing.- Upon satisfactory completion of the sealing test, the memory shall be flushed in accordance with the requirements of 3.2.4. The flushing can be accomplished by removing one of the screws, 10526777. Attach pressure and vacuum system connection to the screw hole for the purpose of flushing. Evacuate the unit to a pressure of 10,000 microns followed by backfilling to a pressure of 27 inches of mercury with dry nitrogen. Repeat the operation for a total of three cycles. Remove the system connection and reassemble the screw, 10526777, to complete the sealing."

Paragraph 4.5.1.8.2: Delete and substitute:

"4.5.1.8.2 Operating.- The memory shall be placed within a test chamber in the horizontal orientation and the absolute internal pressure of the chamber reduced to 20.58 inches of mercury (corresponding to an altitude of 10,000 feet above sea level). The rate of change of pressure shall not exceed 2.44 inches of mercury per minute. The temperature specified in 3.4.6.1 shall be maintained. While the altitude and the temperature is maintained, the memory shall be operated continuously for two hours except that a complete stop/start cycle shall be conducted at half-hour intervals for a total of four stop/start cycles. The clock channel signal shall be monitored throughout and the memory shall comply with the requirements of 3.5.2.1, 3.5.2.2 and 3.2.5. The chamber shall be returned to the conditions of 3.5 at a pressure rate not to exceed 2.44 inches of mercury per minute after which the memory shall be subjected to the tests defined in 4.5.2.3, 4.5.2.4, and 4.5.2.5 through 4.5.2.18 to determine compliance with 3.4.6.1."

Paragraph 4.5.2.2: Delete and substitute:

"4.5.2.2 Residue.- The memory shall be subjected to the test procedure specified in 3.2.2."

Paragraph 4.5.2.7.1.2: Delete and substitute:

"4.5.2.7.1.2 Signal sector (information per Table II)amplitude.- The

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

maximum pulse, zero-to-peak, shall not be greater than 200 millivolts for Method II and 220 millivolts for Method I. Amplitude shall be determined using memory motor power B, and read head load B. The minimum pulse, peak-to-peak, shall not be less than 140 millivolts for Method II and 115 millivolts for Method I. This measurement is to be made using motor power A, and read head load A. The read head is to be moved to smaller radii to make this adjustment. One channel may be 130 millivolts minimum (Method II). This channel must be additionally tested for this characteristic at +135°F and the reading at -25°F and +135°F shall not be less than 115 millivolts. Memory must operate satisfactorily in a computer during testing in accordance with paragraph 3.6."

NOTE: Up to 3 heads that exceed allowable limits may be repaired without necessity for retesting at temperature extremes provided that memory operates satisfactorily in a computer when tested in accordance with paragraph 3.6 and the replaced or adjusted head does not exceed the limits specified below when tested in accordance with Method II.

4.5.2.7.1.2 Signal sector amplitude.- The adjusted or replaced head does not exceed 200 millivolts.

4.5.2.11(a) Maximum adjusted signal amplitude.- The adjusted or replaced head does not exceed 200 millivolts.

4.5.2.11(b) Minimum adjusted signal amplitude.- The adjusted or replaced head shall not be less than 140 millivolts.

4.5.2.12 Channel pulse width.- The adjusted or replaced head shall have a pulse width of $1 \begin{smallmatrix} +0.18 \\ -0.12 \end{smallmatrix}$ clock cycles at a potential which is 25 ± 2 millivolts above zero potential.

4.5.2.16 Pulse delay test.- The adjusted or replaced head shall not exceed .22 clock cycles."

Paragraph 4.5.2.9: Delete and substitute:

"4.5.2.9 Information phase shift.- The sector information phase shift shall be determined on all negative-to-positive potential crossings of the sector information. The phase shift shall be determined at a level of 45 millivolts ±2 mv. There shall be .5 ±.08 clock cycles phase shift -- (No changes to end of paragraph) ---."

Paragraph 4.5.2.10: Delete first sentence and substitute:

"The pulse width shall be 1 +.18 -.12 clock cycles at a channel signal level which is 25 millivolts above zero potential."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

Paragraph 4.5.2.11(a): Delete and substitute:

"4.5.2.11(a) Maximum adjusted signal amplitude.- The read heads shall be moved to a smaller radius to reduce signal amplitude if required to meet amplitude requirements. The maximum pulse amplitude shall not be greater than 220 for Method I and 200 millivolts for Method II zero-to-peak, reading a cyclic pattern which consists of eight ones followed by eight zeros. The pattern shall be recorded continuously while being read. The amplitude shall be determined using memory motor power B and read head load B. Ten percent of the channels may be 240 mv maximum. Channels must be tested for this characteristic at -25°F and at +135°F."

Paragraph 4.5.2.11(b): Delete and substitute:

"4.5.2.11(b) Minimum adjusted signal amplitude.- The minimum signal amplitude after the maximum signal amplitude has been adjusted (per paragraph 4.5.2.11(a)) shall not be less than 115 millivolts for Method I and 140 millivolts for Method II peak-to-peak. It shall be determined per paragraph 4.5.2.11(c) and 4.5.2.11(d). Two channels may be 130 millivolts minimum (Method II). These channels must be additionally tested for this characteristic at +135°F and the reading at -25°F and +135°F shall not be less than 115 millivolts. Memory must operate satisfactorily in a computer during testing in accordance with paragraph 3.6."

Paragraph 4.5.2.12: Delete and substitute:

"4.5.2.12 Channel pulse width.- The channel pulse width shall be 1 +0.18 -0.12 clock cycles at a potnetial which is 25 ± 2 millivolts above zero potential. The pulse width shall be determined while reading a cyclic, one (1) followed by twelve zeros (0), pattern which is being written continuosuly. The pulse width shall be determined while using motor power A and read head load A for Method I and II. Twenty-five (25%) of the channels may be 1 + .22 maximum. These channels must be additionally tested for this characteristic at +135°F, and the reading at -25°F and +135°F shall not be less than 115 millivolts. Memory must operate satisfactorily in a computer during testing in accordance with paragraph 3.6."

Paragraph 4.5.2.13: Delete and substitute:

"4.5.2.13 Channel write head to read head spacing.- The final adjustment of Write Head to Read Head spacing shall be such as to allow the memory to operate in accordance with the requirements of paragraph 4.5.4.3 of MIL-C-60184 when installed in any computer."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

Paragraph 4.5.2.13.1: Delete.

Paragraph 4.5.2.13.2: Delete.

Paragraph 4.5.2.14.1: Delete and substitute:

"4.5.2.14.1 Noise test A.- Write continuously a cyclic pattern of one (1) followed by a zero (0) in phase for more than 100 disk revolutions. Write continuous zeros (0) for one disk revolution. There shall be no pulses in excess of 10 millivolts for Method I or II, zero to peak. This shall be determined using Motor Power B. and read head load B. One channel may be 20 millivolts providing the memory operates satisfactorily installed in a computer during testing in accordance with Paragraph 3.6."

Paragraph 4.5.2.14.2: Delete and substitute:

"4.5.2.14.2 Noise test B.- Write continuous zero (0) for more than 100 disk revolutions. There shall be no pulse, zero-to-peak, greater than 10 millivolts for Method I and II. This shall be determined using motor power B and read head load B. Ten percent of the channels may be 20 millivolts providing the memory operates satisfactorily installed in a computer during testing in accordance with Paragraph 3.6."

Paragraph 4.5.2.14.3: Delete and substitute:

"4.5.2.14.3 Noise test C.- Write continuously a cyclic pattern of one (1) followed by seven zeros (0). If the waveform goes positive immediately following the points at which the negative potential pulses go to zero, one of the positive pulses immediately following the negative pulses shall be measured. It shall not be greater than 10 millivolts, zero-to-peak, of the preceding negative pulse amplitude Method I or II using motor power B and read head load B. Twenty-Five percent of the channels may be 20 millivolts providing the memory operates satisfactorily installed in a computer during testing in accordance with Paragraph 3.6."

Paragraph 4.5.2.14.4: Delete and substitute:

"4.5.2.14.4 Noise test D.- This test is to measure the amount of signal read in a channel due to a signal being written into an adjacent channel of smaller radii. Write zeros (0) continuously for 25 disk revolutions or more on the channel being tested, then stop. Read from the channel being tested and write a cyclic pattern of one (1) followed by a zero (0) on the adjacent channel of samller radius. The signal read from the disk, produced by the adjacent channel write head, shall be less than 3 millivolts, zero-to-peak, for Method I or II. This is to be measured using motor power B and read head load B. Ten percent of the channels may be 5 millivolts maximum providing the memory operates satisfactorily installed in a computer during testing in accordance with Paragraph 3.6."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

Paragraph 4.5.2.14.5: Delete and substitute:

"4.5.2.14.5 Noise test E.- This test measures the efficiency of the erase heads in Channels A, L, N, X, I, D, R, and Q. Read on one channel and write continuously a cyclic pattern of one (1) followed by a zero (0) on all channels of the same radii. There shall be no pulse, zero-to-peak, greater than 10 millivolts for Method I or Method II. Motor power B and read head load B shall be used. One erase head may be allowed to be of lesser efficiency so that the channels associated with that erase head may exhibit pulses of 15 millivolts providing the memory operates satisfactorily installed in a computer during testing in accordance with Paragraph 3.6."

Paragraph 4.5.2.14.6: Delete and substitute:

"4.5.2.14.6 Total noise.- The sum of the readings determined by noise tests A, B, and D, 4.5.2.14.1, 4.5.2.14.2, and 4.5.2.14.4, for each channel, shall not exceed 25 millivolts for Method II to determine compliance with 3.5.4.5. Ten percent of the channels may be 35 millivolts maximum providing the memory operates satisfactorily installed in a computer during testing in accordance with Paragraph 3.6."

Paragraph 4.5.2.16: Delete and substitute:

"4.5.2.16 Pulse delay test.- Write continuously a cyclic pattern of twelve (12) ones (1) followed by twelve (12) zeros (0). Write continuously a cyclic pattern of a one (1) followed by a zero (0). The pulse delay at the positive 37.5 millivolts ± 2 mv crossings of a zero potential to a positive change, between two patterns, shall not exceed .22 clock cycles for Methods I and II. This shall be determined using motor power B and read head load B. Fifteen percent of the channels may be .24 clock cycles maximum. Channel must be tested for this characteristic at -25°F and at +135°F. Memory must operate satisfactorily when installed in a computer during testing in accordance with Paragraph 3.6."

Paragraph 4.5.2.17: Delete in its entirety.

Paragraph 4.5.2.19: Delete in its entirety.

Add new paragraph as follows:

"4.5.2.20 Memory run-in.- Memories shall be subjected to the test program, as shown in Figure I, to determine compliance with the requirements of Paragraph 3.6."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.

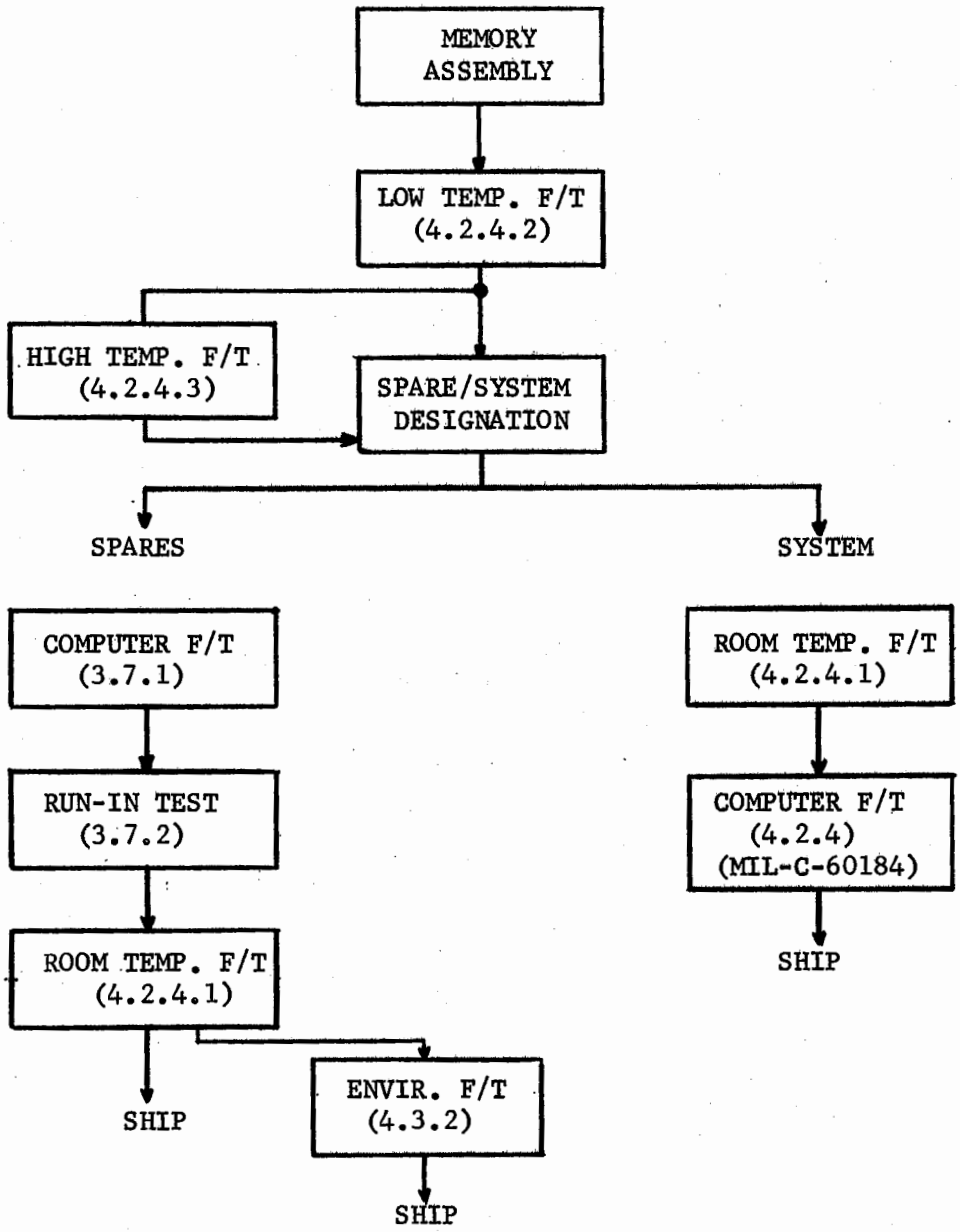


FIGURE 1

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A297Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:15Z
Check the source to verify that this is the current version before use.